

LaserLT-60 and LaserLT-100

Large-Display Digital Weight Indicators



LaserLT-60



LaserLT-100

Approvals



Measurement
Canada
Approved



Part Number/Price



Part #	Description	Price
197453	LaserLT-60, indicator with weighing functionality 2.4 in (60 mm) LED	Consult
197454	LaserLT-100, indicator with weighing functionality 4.0 in (100 mm) LED	Consult

Options/Accessories

Part #	Description	Price
185256	Mount bracket, 2 tilting side brackets for LaserLT-100	Consult
185258	Visor for LaserLT-100	Consult

Dimensions

Large Display Digital Weight Indicator			
LaserLT-60			
A	16.14 in (410 mm)	D	7.28 in (185 mm)
B	6.50 in (165 mm)	E	2.64 in (67 mm)
C	3.03 in (77 mm)	F	4.84 in (123 mm)
LaserLT-100			
A	16.93 in (430 mm)	D	7.63 in (194 mm)
B	7.28 in (185 mm)	E	2.52 in (64 mm)
C	2.52 in (64 mm)	F	3.98 in (101 mm)

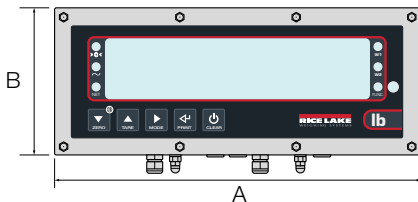

Standard Features

- LED Display
- Integrated five-key waterproof keypad
- Includes removable back wall mount bracket
- Power from 12 to 24 VDC, included with 110 to 240 VAC internal power supply
- Up to four independent scales or four load cell inputs
- Quick menu for real and theoretical calibration
- Up to three calibration linearization points
- Semi-automatic and presettable tare
- Two digital outputs for 13 setpoint types with timers to enable on and delay period
- Two digital inputs for operating keys remotely

Specifications

Power:

AC voltages: 100 to 240 VAC
DC voltages: 12 to 24 VDC

Excitation Voltage:

5 VDC, 120 mA, 16 × 350 ohm

Analog Signal Input Range:

± 39 mV

Analog Signal Sensitivity:

0.03 µV/graduation minimum
0.3 µV/graduation recommended

A/D Sample Rate:

Four channel A/D up to 200 Conv./sec. auto select

Resolution:

Internal: 1,500,000 counts
Display: 800,000

Digital I/O:

Two inputs: 12/24 VDC
Two outputs: 150 mA 48 VAC / 150 mA 60 VDC

Communication Ports:

(1) RS-232, (1) RS-485

Display:

6-digit, 7-segment discrete red LED lamps, single width 2.4 in (60 mm) or 4 in (100 mm) digit
Decimal/comma indication in any position
Annunciators for NT, Stability, COZ
5 levels of intensity

Maximum Viewing Distance:

LaserLT-60: 2.4 in digit 75 ft (25 m)
LaserLT-100: 4 in digit 100 ft (30 m)

Keys/Buttons:

Five key, Zero (Down), Tare (Up), Mode (Right), Print (Enter), C (On/Off)

Temperature:

-40° F to 120° F (-40° C to 49° C)

Rating/Material:

304 stainless steel, IP68

Weight:

10 lb (4.5 kg)

Warranty:

One-year limited

Approvals:

NTEP CC 20-046 III/IIIL 10,000d
Measurement Canada AM-6165C III/IIIL 10,000d
CE Marked

INDICATORS /
CONTROLLERS