

480/482 Legend® Series

Digital Weight Indicator

INDICATORS /
CONTROLLERS



Specifications

Power:

Line voltages: 100 to 240 VAC
Frequency: 50/60 Hz
DC voltages: n/a

Power Consumption:

8 W

Excitation Voltage:

5 VDC, 8 × 350 ohm or 16 × 700 ohm load cells

Analog Signal Input Range:

±7mV/V

Analog Signal Sensitivity:

0.1 μV/graduation minimum,
0.5 μV/graduation recommended

A/D Sample Rate:

5, 10, 20, 40 Hz, software selectable

Resolution:

Internal: 523,000 counts
Display: 100,000

System Linearity:

Within 0.01% of full scale

Digital I/O:

Optional 2 or 4 inputs
4 or 8 dry-contact relays

Communication Ports:

Com 1: RS-232 full duplex
Com 2: RS-232 full duplex or 20 mA simplex, continuous
Both ports 1200, 2400, 4800, 9600, 19200, 38400 baud seven or eight data bits, even, odd or no parity

(Optional) Analog Output:

16-bit resolution, voltage output 0-10 VDC, current output 0-20 mA / 4-20 mA

(Optional) Relay Board:

Two opto-isolated, 5 to 24 VDC, active high inputs
Primary keys, pseudo functions, batching functions
(4) 30 VDC, 2 amp dry-contact relays

Annunciators:

Gross, net, center of zero, standstill, lb, kg, tare, preset tare

Display:

480/480 Plus: LED display
0.8 in (20 mm), six-digit, seven-segment
482/482 Plus: LCD backlit display,
transmissive/transflective
0.8 in (20 mm), six-digit, seven-segment

Keys/Buttons:

Flat membrane panel, embossed keys, tactile feel

Temperature Range:

Certified: 14 °F to 104 °F (-10 °C to 40 °C)
Operating: 14 °F to 122 °F (-10 °C to 50 °C)

Rating/Material:

NEMA Type 4X/IP66
Stainless steel

Weight:

6.4 lb (2.9 kg)

Warranty:

Two-year limited

EMC Immunity:

EN 50082 Part 2 IEC EN
61000-4-2, 3, 4, 5, 6, 8, and 11

Approvals:

NTEP 12-123, Class III/IIIL, 10 ,000d
Measurement Canada AM-5892C
OIML R76/2006-NL1-15.24
EU Test Certificate TC8322
CE Marked
cULus
UKCA

Approvals



Measurement
Canada
Approved



UK
CA




Standard Features

- LED display (480)
- LCD backlit display (482)
- Time and date, battery backed
- Local/remote operation
- Numeric keypad (480 Plus/482 Plus)
- Keyed entries for setpoint values (480 Plus/482 Plus)
- Two independent serial ports
- NEMA Type 4X/IP66 stainless steel washdown enclosure
- Programmable ticket formats for gross, net, accumulator and setpoints
- Five continuous stream formats
- Adapter filter or rolling average filter
- Operator functions through menu for audit trail, preset tare, unit ID, accumulator, time and date, setpoints, communications and print formats
- Eight setpoints, sequenced batch engine
- Configurable with Revolution® software

Dimensions

480/482 Legend Series			
A	9.50 in (241 mm)	D	3.65 in (92 mm)
B	10.00 in (254 mm)	E	2.75 in (70 mm)
C	11.00 in (279 mm)	F	7.00 in (178 mm)
		G	6.00 in (152 mm)
		H	3.75 in (95 mm)

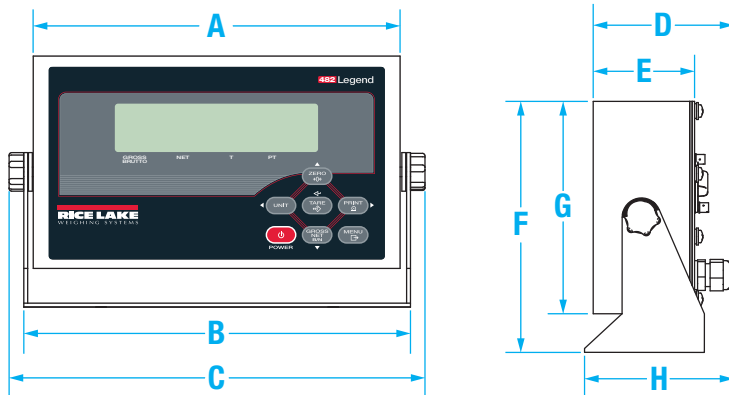

480/482 Legend® Series

Digital Weight Indicator

INDICATORS /
CONTROLLERS

Part Number/Price

Part #	Description	Est. Weight	Price
480 Indicator 115 VAC †			
126564 †	480 LED	8 lb	Consult
130338 †	480 LED with analog output	8 lb	Consult
480 Indicator 90 to 264 VAC ††			
126565 ††	480 LED	8 lb	Consult
130339 ††	480 LED with analog output	8 lb	Consult
480 Plus Indicator 115 VAC †			
164588 †	480 Plus LED	8 lb	Consult
164589 †	480 Plus LED with analog output	8 lb	Consult
164590 †	480 Plus LED with relay output	8 lb	Consult
480 Plus Indicator 90 to 264 VAC ††			
164591 ††	480 Plus LED	8 lb	Consult
164592 ††	480 Plus LED with analog output	8 lb	Consult
164593 ††	480 Plus LED with relay output	8 lb	Consult
482 Indicator 115 VAC †			
164581 †	482 LCD	8 lb	Consult
482 Indicator 90 to 264 VAC ††			
164672 ††	482 LCD	8 lb	Consult
482 Plus Indicator 115 VAC †			
164584 †	482 Plus LCD	8 lb	Consult
482 Plus Indicator 90 to 264 VAC ††			
164673 ††	482 Plus LCD	8 lb	Consult

Options/Accessories

Part #	Description	Price
131340	Mounting bracket for option boards	Consult
131341	Analog output, 0-10 VDC, 4-20mA (requires 131340)	Consult
131342	Relay board, two digital inputs, four dry contact outputs (requires 131340)	Consult
165379	Flash update cable	Consult
151100	A/D sealing kit, used with audit trail tracking	Consult
151099	Panel mount bezel (not NEMA Type rated)	Consult
83564	Clear protective overlay (package of five)	Consult
119201	Installation manual (480 indicator)	Consult
165124	Installation manual (482 indicator)	Consult
Primary Replacement Components		
131345	Overlay, 480 six-key, red window	Consult
159612	Overlay, 480 Plus with numeric keys, red window	Consult
131346	Display board, LED	Consult
161048	Overlay, 482 six-key, green window	Consult
161049	Overlay, 482 Plus with numeric keys, green window	Consult
153776	Display board, LCD	Consult
131316	Power supply, 85-265 VAC	Consult
131318	CPU board	Consult
131319	A/D board	Consult

* Revolution can be downloaded for free at www.ricelake.com

To have your option factory installed, please specify when placing your order.



† US plug (NA) - Type B



†† Euro Plug - Type E