



Uni-3 L2i pictured with remote scale base and optional wrap station components. (47672, 47670, 53963, 46927)

Ishida Uni-3 L1i/L2i

Price Computing Printer with Remote Scale Base

Networking capabilities and user-friendly operation make the Uni-3 L1i/L2i with remote scale base systems ideal for prepack operations.

The Uni-3 L1i/L2i has two display types at attractive price points. Choose from multiple label formats for increased productivity and versatility. With standard Ethernet or optional wireless connectivity, the Uni-3 L1i/L2i offers extraordinary power at an exceptional value.

Specifications

Weighing Resolution:

3,000 display divisions maximum

Capacity (Dual Range):

15 x 0.005 lb/30 x 0.01 lb

Capacity (Single Range):

30 x 0.01 lb

Display Types:

L1: LCD, blue, alphanumeric (23 digits 16 seg)

L2: LCD, backlight, alphanumeric (192 x 16DM + 23 digits 7 seg)

Display Items:

Tare: Four-digits
Unit price: Five-digits
Total price: Six-digits

Preset Keys:

84 one-touch preset keys 168 presets (assign two items/key)

Memory:

2MB

Communications:

TCP/IP 10/100 Base T Ethernet

Platter:

15.5 x 9.5 in

Printing Speed:

3.9 in (100 mm) per second

Printing:

Direct thermal 2.2 in (56 mm)

Label Size:

Width: 1.5 to 2.5 in (38 to 64 mm)
Length: 1.2 to 6.9 in (30 to 175 mm)

Label Roll:

Inside diameter: 1.6 in (40 mm) min
Outside diameter: 3.9 in (100 mm) max

Label Backing Paper:

Width: Up to 2.6 in (66 mm)

Power Supply:

AC 100 to 240V, 50/60 Hz

Power Consumption:

Stand-by: 50W
In operation: 100W

Classification:

NTEP CC 07-005
UL listed

Warranty:

One-year limited



Standard Features

- Blue alphanumeric LCD display (23 digits, 16 segments) or backlit alphanumeric LCD display (23 digits, 7 segments)
- Dual-range weighing (0- to 15 lb x 0.005 lb/ 15 to 30 lb x 0.01 lb)
- Side-load label
- Fast printing speed (3.9 in/100 mm per second)
- Multiple label formats
- Static TCP/IP Ethernet communication
- 84 one-touch preset keys, 168 presets (assign two items/key)
- 2 MB memory
- Proportional tare
- Compatible with third-party communication software, including ADC's InterScale and Invatron's PLUM
- 2020 nutrition labeling


PART #	MODEL	CAPACITY
170316	Uni-3 L1i Bench	15 x 0.005 lb/30 x 0.01 lb
170317	Uni-3 L1i Pole	15 x 0.005 lb/30 x 0.01 lb
170318	Uni-3 L2i Bench	15 x 0.005 lb/30 x 0.01 lb
170319	Uni-3 L2i Pole	15 x 0.005 lb/30 x 0.01 lb

Please refer to the labels section of this catalog for ordering information and case quantity pricing.

Uni-3 DISPLAYS




Uni-3L1



Uni-3L2

DIMENSIONS			
REMOTE SCALE BASE			
D	3.7 in (95 mm)	F	10.0 in (254 mm)
E	15.7 in (400 mm)	G	13.8 in (350 mm)
H	7.9 in (200 mm)		

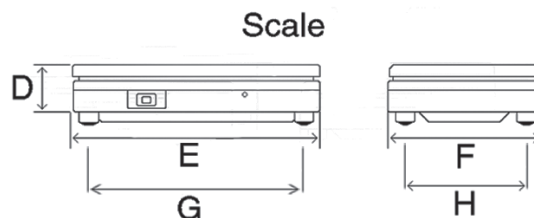

Ishida Uni-3 L1i/L2i

Price Computing Printer with Remote Scale Base

PART #	MODEL/DESCRIPTION	CAPACITY	EST. SHIPPING WEIGHT	PRICE
170316	Uni-3 L1i Bench	15 x 0.005 lb/30 x 0.01 lb	45 lb	Consult
170317	Uni-3 L1i Pole	15 x 0.005 lb/30 x 0.01 lb	45 lb	Consult
170318	Uni-3 L2i Bench	15 x 0.005 lb/30 x 0.01 lb	45 lb	Consult
170319	Uni-3 L2i Pole	15 x 0.005 lb/30 x 0.01 lb	45 lb	Consult

Options/Accessories

47670	Wrap station base, (W x D x H) 22 x 23 x 32 in	Consult
47672	Wrap station left wing, (W x D) 14 x 22 in	Consult
46927	Wrap station right wing, (W x D) 14 x 22 in	Consult
53962	Wrap station right wing with hood, (W x D) 14 x 34 in	Consult
101139	Wrap station white-poly scale shelf (recommended when using optional right wing with hood, PN 53962)	Consult
53963	Wrap station all-purpose center shelf, (W x D) 24 x 15 in	Consult
53866	Wrap station heat pad cover replacement, (W x D) 15 x 6 in	Consult
104948	Scale base alignment plate	Consult
155176	Day Glow label dispenser for PN 47670	Consult
151761	Day Glow label dispenser spacer, pack of ten	Consult

Communication

168750**	ScaleLink Pro 5 Lite software CD, license file required and purchased separately (see page 72)	Consult
168751*	ScaleLink Pro 5 Lite license file, one license required per computer	Consult
160259**	ScaleLink Pro 5 software CD, license file purchased separately (see page 74)	Consult
152628*	ScaleLink Pro 5 license file, one license required per machine	Consult
168745	Internal wireless communication, 802.11 b/g 2.4 Ghz (factory installation required)	Consult
78860	Cross cable, Ethernet CAT5, 6 ft	Consult

Manuals and Service Tools

166737**	Additional owners manual	Consult
166736**	Service manual	Consult
160906	USB flash memory device, 1 GB	Consult
118188**	Uni Series suport USB (contains manuals, training videos and libraries)	Consult

Label Stock

Please refer to labels section of this catalog for ordering information and case quantity pricing

*Software key is provided after online registration is completed

**Manuals and software programs can be downloaded from the distributor section of www.ricelake.com/retail.

DIMENSIONS			
A	17.2 in (437 mm)	E	20.6 in (524 mm)
B	10.5 in (266 mm)	F	6.3 in (159 mm)
C	16.1 in (410 mm)	G	14.6 in (370 mm)
D	19.7 in (500 mm)	H	6.5 in (159 mm)