

Specifications

Scale Unit

Capacity/Division: 0-15 lb × 0.005 lb / 15-30 lb × 0.01 lb (Multi-interval) 0-30 lb \times 0.01 lb (Single range) 0-6 kg × 0.002 kg / 6-15 kg × 0.005 kg (Multi-interval)

$0-15 \text{ kg} \times 0.005 \text{ kg}$ (Single range)

Scale Platter Size: Bench / Pole: 14.6 × 10.5 in (371 × 267 mm)

Display

Size:

Operator Side: 10.1 in; Customer Side: 7 in

Systems: Capacitive touch Panel

Printer

Media Type: Die-cut label; Continuous label/ Linerless label/Receipt (Optional)

Media Size:

Outside Diameter of roll: Max. 100 mm (4.0 in) or less Inner core diameter: 40 mm +/-1 mm (1.6 in) Width: 30-64 mm (linerless label: 60 mm) Length: 30-200 mm (linerless label: 30-175 mm)

Cassette:

Non-cassette (Virtual cassette function)

Thermal Head: 2.2 in (56 mm)

Resolution:

8 dot/mm (200 dpi) **Speed of Printing:**

MAX: 120 mm/sec **Printing Width:**

MAX: 56 mm

Printing Length: MAX: 200 mm

Bar Code Type:

JAN, EAN, EAN128, CODE128, UPC, ITF. GS1. QR Code

Control I/O Port:

TCP/IP. USB. RS-485. Connector for external scale

OS: Linux

Communication: Ethernet, wireless

Approvals: NTEP CC 23-036 cULus

images and videos. The PC-based technology together with a crystal-sharp LED display, provide more marketing capabilities such as video with sound and product pairing promotions.

The Uni-8 Series bench scale is ideal for both backroom production and the countertop.

The Uni-8's compact design fits virtually any size counter, occupying a very small footprint. This PC-based scale includes a 10-inch LED backlit operator display and a 7-inch LED backlit customer display for stunning promotional

Price Computing Scale/Printer/Color Touchscreen

Standard Features

Ishida Uni-8

- Large color touchscreen (10 in)
- · Adjustable touchscreen viewing angle
- · Play videos with sound on customer and operator display
- 10 in (800 × 600) operator display 7 in (800×480) customer display
- Dual-range weighing (0 to 15 lb × 0.005 lb, $15 \text{ to } 30 \text{ lb} \times 0.01 \text{ lb}$
- · Label printing: die-cut labels and/or continuous paper
- Customizable label formats: 999
- PC-based scale operating system
- · Solid state drive eliminates moving parts
- SSD memory 250 MB

Options

- ScaleLink Pro 5 scale management software, including label design, data back-up and remote diagnostics
- · Seafood/Produce platter

· SD memory card slot · Up to 120 mm/sec print speed

- 2020 nutrition labeling
- Fully compliant with RoHS regulations for a completely lead-free machine
- Barcodes: EAN/UPC 8/12/13, ITF FS1, QR CODE, GS1, CODE128 and EAN128
- · Compatible with many third-party software communication packages
- · Remote access
- · Control for 3rd party driver
- Wireless ethernet
- · Linerless label kit

PART #	MODEL	WIRELESS	CAPACITY
220030	Uni-8 Bench		0 to 15 × 0.005 lb / 15 to 30 × 0.01 lb
220031	Uni-8 Pole		0 to 15 \times 0.005 lb / 15 to 30 \times 0.01 lb



Side-loading Label Feature



Large Touchscreen

www.ricelake.com/retail • 800-472-6703 22

An ISO 9001 registered company © 2024 Rice Lake Weighing Systems • Specifications subject to change without notice. • F.O.B. Rice Lake, Wisconsin

www.ricelake.com/retail• 800-472-6703

Ishida Uni-8

Price Computing Scale/Printer/Color Touchscreen

PART #	MODEL/DESCRIPTION	WIRELESS	CAPACITY	EST. SHIP WEIGHT	PRICE
220030	Uni-8 Bench		0 to 15 × 0.005 lb / 15 to 30 × 0.01 lb	31 lb	Consult
220031	Uni-8 Pole		0 to 15 × 0.005 lb / 15 to 30 × 0.01 lb	34 lb	Consult

Options/Accessories

-		
46916	Produce platter (L \times W \times D) 11.5 \times 17 \times 0.7 in	Consult
46917	Fish platter (L \times W \times D) 11.5 \times 17 \times 0.7 in	Consult
170541	Linerless	Consult

Communication

152628*	ScaleLink Pro 5 license file, one license required per computer (Version 2.62 or higher required)	Consult
78860	Cross cable, Ethernet CAT5, 6ft	Consult

Manuals and Service Tools

118188**	Uni Series support USB (contains manuals, training videos and libraries)	Consult
160906	USB flash memory, 1 GB	Consult
222152**	User manual	Consult
222153**	Service manual	Consult
Consult**	Installation manual	Consult

Label Stock

Please refer to labels section of this catalog for ordering information and case quantity pricing

*Software key is provided after online registration is completed

**Manuals and software programs can be downloaded from the distributor section of www.ricelake.com/retail


Dimensions


Please see next page for model dimensions.

Ishida Uni-8


Price Computing Scale/Printer/Color Touchscreen

DIMENSIONS BENCH			
Α	10.5 in (266 mm)	Е	7.8in (197mm)
В	17.3 in (440 mm)	F	6.7 in (170 mm)
С	14.6in (370mm)	G	6.3 in (159 mm)
D	16.1 in (410 mm)	Н	20.3in (515mm)





DIMENSIONS POLE			
Α	10.5 in (266 mm)	F	6.3 in (159 mm)
В	12.6 in (319 mm)	G	21.9in (555mm)
С	14.6 in (370 mm)	Н	15.0in (382mm)
D	16.1 in (410 mm)	I	3.7 - 5.6in (93 - 143mm)
Е	7.8in (197 mm)		

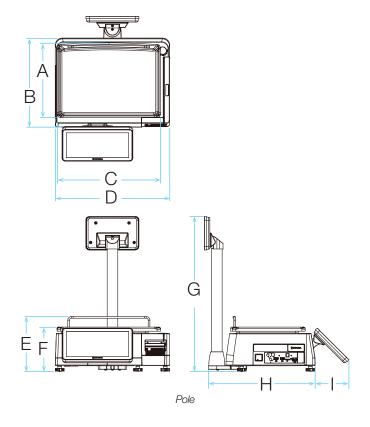

24

www.ricelake.com/retail • 800-472-6703 An ISO 9001 registered company © 2024 Rice Lake Weighing Systems • Specifications subject to change without notice. • F.O.B. Rice Lake, Wisconsin