



RoughDeck® Rough-n-Ready System

Floor Scale and 482/482 Plus Indicator Package

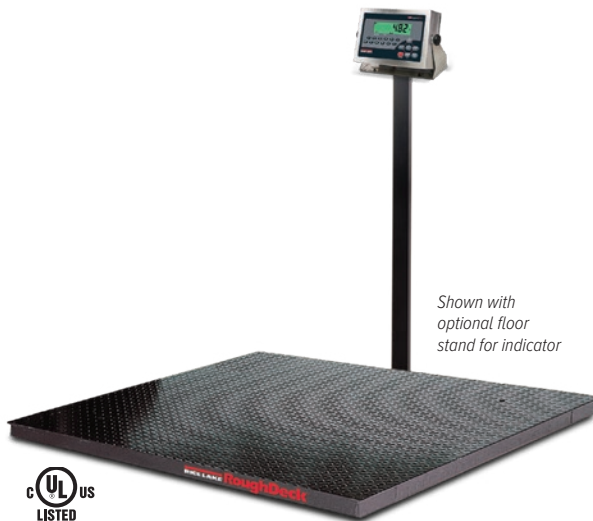

Approvals

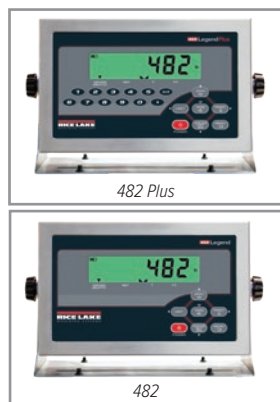

Measurement
Canada
Approved



Part Number/Price

Part#	Floor Scale Capacity	Indicator	Est. Weight	Price
† 115 VAC - 4 ft × 4 ft × 3.5 in RoughDeck (NTEP Certified) Indicator Package with Tilt Stand				
168146	5,000 lb	482	405 lb	Consult
168152	5,000 lb	482 Plus	405 lb	Consult
168147	10,000 lb	482	405 lb	Consult
168153	10,000 lb	482 Plus	405 lb	Consult
†† 230 VAC - 4 ft × 4 ft × 3.5 in RoughDeck (NTEP Certified) Indicator Package with Tilt Stand				
168148	5,000 lb	482	405 lb	Consult
168154	5,000 lb	482 Plus	405 lb	Consult
168149	10,000 lb	482	405 lb	Consult
168155	10,000 lb	482 Plus	405 lb	Consult
† 115 VAC 4 ft × 4 ft × 3.5 in RoughDeck (Canadian Weights and Measures Approved) Indicator Package with Tilt Stand				
168150	2,500 kg	482	405 lb	Consult
168156	2,500 kg	482 Plus	405 lb	Consult
168151	5,000 kg	482	405 lb	Consult
168157	5,000 kg	482 Plus	405 lb	Consult



†† CEE 7/7 plug



† NEMA 5-15 plug

Options/Accessories

Part#	Description	Price
Consult	Access ramps available	See catalog page 390
Consult	Pit frames available	See catalog page 393
Consult	Bumper guards available	See catalog page 396 through catalog page 398
Consult	Portability frames available	See catalog page 399 through catalog page 404
18777	Floor anchor plates, mild steel (set of 2)	Consult
19352	Floor stand for indicator, 36.3 in high, mild steel	Consult
126384	Floor stand for indicator, 48 in high, mild steel	Consult

Standard Features

- Package includes: RoughDeck HP 4 ft x 4 ft x 3.5 in floor scale, 20 ft of hostile environment load cell cable, quick disconnect and 482/482 Plus indicator
- Package is factory-calibrated for 5,000 divisions

Scale

- Heavy-duty design with structural steel under support
- Four NTEP certified alloy steel shear beam load cells
- Side-access JB4SS TuffSeal® junction box

Indicator

- LED display
- Time and date battery backed
- Numeric keypad (482 Plus only)
- Communication ports

RoughDeck Specifications

End Load Capacity:

- 100% full scale at 5,000 lb
- 80% full scale at 10,000 lb

Cable Length:

20 ft (6.1 m) for connecting junction box to indicator

Threaded Eyebolt:

Hole (1/2-20 NF) located in center of deck for easy lifting

Warranty (limited):

- Weldment: Five-year
- Load cells: Two-year
- All other components: One-year

Approvals:

- NTEP CC 92-001, Class III 5,000d
- Measurement Canada AM-4827, Class III 5,000d

482/482 Plus Specifications

Communication Ports:

- Com 1: RS-232 full duplex
- Com 2: RS-232 full duplex or 20 mA simplex, continuous
- Both ports 1200, 2400, 4800, 9600, 19200, 38400 baud seven or eight data bits, even, odd or no parity

Display:

LCD backlit display, Transmissive/Transflective 0.8 in (20 mm), six-digit, seven-segment

Annunciators:

Gross, net, center of zero, standstill, lb, kg, tare, preset tare

Keys/Buttons:

Flat membrane panel, embossed keys, tactile feel

Rating/Material:

Enclosure: NEMA Type 4X/IP66, heavy-gauge stainless steel

Approvals:

- NTEP CC 12-123
- Measurement Canada AM-5892C, Class III/IIHD, 10,000d
- CE Marked
- cULus Listed

FLOOR SCALES