


SINGLE POINT
RLPWM16

Aluminum, Environmentally Sealed, NTEP Certified 1:5,000 Class III Single Cell, IP67

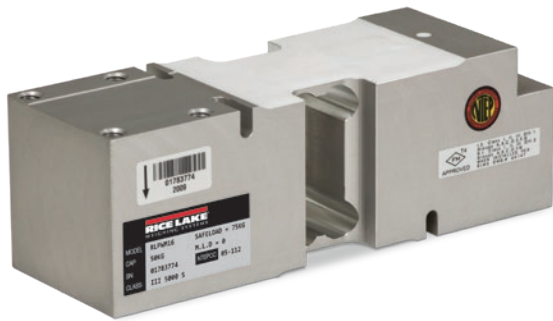

Picture is a representation of actual product.

Approvals





Order Information

| Load Rating | Part # | Est. Weight | Price |
|-------------|--------|-------------|---------|
| 75 kg | 91686 | 5 lb | Consult |

Dimensions

| Rated Capacity | A | B | C | F | G | H | I | J | K | L | M |
|----------------|------|------|------|------|------|------|------|-------|------|-----|-------|
| kg/mm | | | | | | | | | | | |
| 75 to 150 | 52.0 | 16.0 | 62.3 | 52.3 | 63.0 | 50.0 | 35.0 | 107.0 | 35.0 | 5.5 | 188.0 |

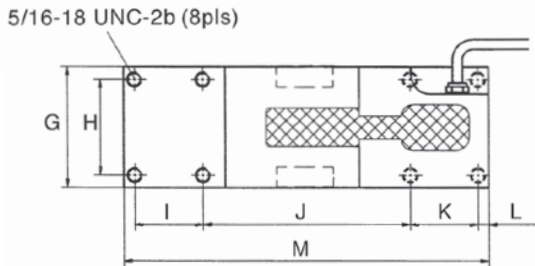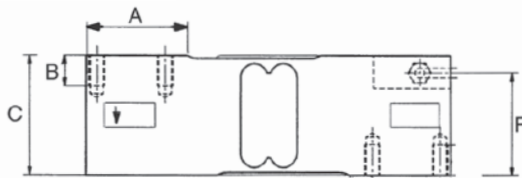

Interchangeable Products

- RICE LAKE WEIGHING SYSTEMS
RL1260 page 178
 VPG® TEDEA-HUNTLEIGH
1260 page 334

Specifications

- Full Scale Output:**
2.0 mV/V
- Output Resistance:**
300 to 500 ohm
- Input Resistance:**
300 to 500 ohm
- Material/Finish:**
Aluminum
- Temperature:**
Compensated range
14 °F to 104 °F (-10 °C to 40 °C)
Operating range
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Environmentally sealed, IP67
- Safe Overload:**
150% full scale
- Rated Excitation:**
5 to 10 VDC (15 V maximum)
- Combined Error:**
0.02% full scale
- Insulation Resistance:**
1,000 megohm
- Cable Length:**
10 ft
- Cable Diameter:**
0.190 in PVC jacket
- Max Platform Size:**
24 × 24 in
- Deflection at Capacity**
50 to 635 kg < 0.6 mm
- Cable Color Code:**
Green +Excitation
Black -Excitation
Red +Signal
White -Signal
Blue +Sense
Brown -Sense
- Warranty:**
Two-year limited
- Approvals:**
FM
NTEP 05-112

RICE LAKE
LOAD CELLS