



Picture is a representation of actual product.

Approvals





Order Information

Load Rating	Part #	Est. Weight	Price
NTEP Certified			
5 kg	188691	2 lb	Consult
10 kg	188692	2 lb	Consult
20 kg	188693	2 lb	Consult
30 kg	188694	2 lb	Consult
50 kg	188702	2 lb	Consult
75 kg	188695	2 lb	Consult
100 kg	188696	2 lb	Consult
200 kg	188697	2 lb	Consult
250 kg	188698	2 lb	Consult
300 kg	188699	2 lb	Consult
500 kg	188700	2 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F	G	H	J	K	M	N
kg/mm												
5 to 500	120.0	41.5	23.5	30.0	24.5	42.0	10.0	82.0	18.0	20.0	20.0	8.2

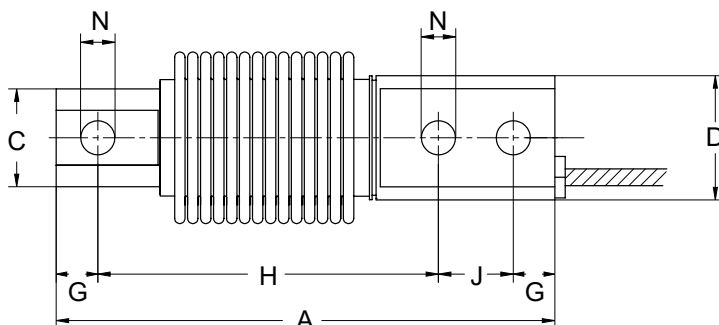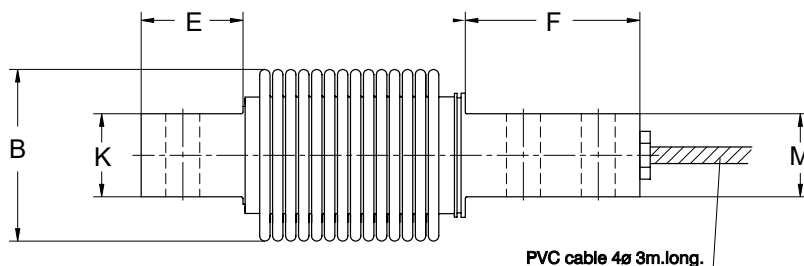

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS
RLHBB

Specifications

- Full Scale Output:**
2.0 mV/V ± 10%
mV/V/ohm calibration
- Output Resistance:**
350 (± 3) ohm
- Input Resistance:**
400 (± 20) ohm
- Material/Finish:**
Stainless steel
- Temperature:**
Compensated range
14 °F to 104 °F (-10 °C to 40 °C)
Operating range
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Hermetically sealed, IP68/IP69K
- Safe Overload:**
150% full scale
- Rated Excitation:**
5 to 10 VDC (15 V maximum)
- Combined Error:**
0.017% full scale
- Insulation Resistance:**
> 5,000 megohm
- Deflection:**
0.2 to 0.4 mm
- Cable Length:**
3 m
- Cable Material:**
PVC
- Cable Color Code:**
Blue +Excitation
Black -Excitation
White +Signal
Red -Signal
Green +Sense
Yellow -Sense
- Warranty:**
Two-year limited
- Approvals:**
NTEP 18-107
OIML R60/2017-A-NL1-19.27
cFmus FM18US0307X

**RICE LAKE
LOAD CELLS**