

## **Measurement Systems International**

14240 Interurban Avenue South • Seattle, Washington 98168-4660 U.S.A. 206-433-0199 • Fax: 206-244-8470 • URL: www.msiscales.com


# MSI-150-02 Sky-Weigh Specifications Aerospatiale SA315B, SA316, SA318C & SA319B

*The MSI-150 Sky-Weigh* cargo hook load monitoring system is available for virtually every make and model lifting helicopter. Each system is unique to its respective model aircraft. FAA supplemental type certification is available on most systems while others are pending initial installation and application approval.

#### THE MSI SYSTEM

The MSI-150 system consists of a "cargo hook compatible" load sensor, digital indicator and interface cables. Complete installation and FAA documentation is included with each system. An optional pilot controlled MSI-150XP thermal tape printer is available for recording load data.

The MSI-150XM digital indicator is microprocessor based for maximum precision and performance in any lifting operation. A liquid crystal digital display allows exact load readings without parallax errors even in direct sunlight. Loads may be displayed in pounds or kilograms. Three levels of digital filtering provide stable readings under the most adverse load condi-

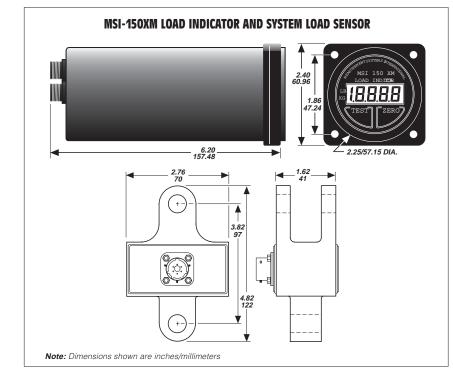

STC Number SH437NW

tions. Push button controls for Zero and Test are front panel mounted for easy operation. A full function preflight test routine assures reliable and accurate system performance and safe operations. The indicator's compact and environmentally sealed enclosure requires minimum space for easy installation.

Night Vision Goggle compatibility and customized options are available for both military and commercial applications. Please contact our factory with your specific requirements.

### SYSTEM SPECIFICATIONS

Digital Indicator Display: 4-1/2 digit .35 in./8.9 mm high LCD with backlighting Resolution: 10 lbs./10 kgs Power: 24-32 VDC Functions: Push button TEST, ZERO, LBS/KG Dimensions:See diagram Weight: 12 oz./340 g Operating Temperature: \_4° F (-20° C) to 140° F (+60° C)

#### Load Sensor

Accuracy: Typically 0.1-1.0% over compensated temperature range and dependent on model configuration Overload: 200% safe 500% ultimate Dimensions:See diagram Weight: 1.9 lb./.86 kg Operating Temperature: -4\* F (-20\* C) to 140\* F (+60\* C)

#### SYSTEM OPTIONS

- Thermal Tape Printer (see MSI-150XP specifications)
  NVG display
- (contact factory for specifications)Display analog output

#### WARRANTY

Load sensor and indicator - 1 Year Interface cables - 90 days

Specifications subject to change without notice.

SYSTEM MODEL AND COMPONENT PART NUMBERS							
AIRCRAFT	HOOK	SYSTEM	SYSTEM	INDICATOR	LOAD SENSOR INTERFACE CABLES PART NO.		
MODEL	MFG/MODEL	MODEL	PART NO.	PART NO.	PART NO.	INTERNAL	EXTERNAL
SA315B	ERC	MSI-150-02	D00467-0001	D00448-0003	D00401-0001	40003-0001	N/A
SA315B	SIREN	MSI-150-02	D00467-0002	D00448-0003	D00401-0002	40003-0001	N/A
SA318C	ERC	MSI-150-02	D00467-0003	D00448-0003	D00401-0003	40003-0001	N/A
SA316 & 319B	ERC	MSI-150-02	D00467-0005	D00448-0003	D00401-0001	40003-0001	N/A
SA316 & 319B	SIREN	MSI-150-02	D00467-0006	D00448-0003	D00401-0002	40003-0001	N/A

© 1992 By Measurement Systems International, Inc.