

Now Includes:
5 Year Parts & Lightning
Protection Warranty

SURVIVOR® PT

Pit-Type - Concrete Deck




STANDARD FEATURES

- Three standard widths: 10ft, 11ft, and 12ft (available up to 14ft, NTEP Certified)
- One 2ft x 2ft square manhole opening
- 75,000lb capacity load cells and pre-assembled mounts
- NTEP Certified, CC 98-011A2
- Junction box(es) appropriate for number of load cells utilized
- 90,000lb Concentrated Load Capacity (CLC)
- 6in reinforced concrete deck
- Up to 200,000lb full scale capacity
- Span deflection ratio (1:3100) for legal highway loads
- Up to 42ft section span

Package includes: Weighbridge steel; weighbridge fasteners; load cells with conduit fitting; load cell mounts with leveling bolts and anchor bolts; copper transient bypass cables at each load cell; poly-coated flexible steel conduit from load cell to metal conduit; conduit fittings from poly-coated flexible steel to metal conduit; conduit for each load cell cable; FRP junction box(es); summing board; homerun cable to indicator (60ft long); print packages including deck assembly, foundation drawing and rebar placement for concrete deck; along with detailed installation manual.


Package does not include: Corrugated sheeting for deck; rebar for concrete deck; pit coping; rebar and mesh for foundation; concrete; indicator; printer; freight charges including material handling, shipping charges, transportation permits and fees, escort(s) charge, and insurance transportation fees.

APPROVALS




SURVIVOR
Durable performance
measured not in years, but
decades.

(Side view)



(End view)

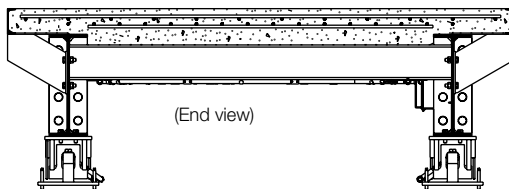

SPECIFICATIONS

LOAD CELLS AND MOUNT ASSEMBLIES:

75,000lb capacity; G-Force™ Patented Self-Checking Mounting System

FULL SCALE CAPACITY:

Up to 200,000lb

DEFLECTION RATIO:

1:3100

CONCENTRATED LOAD CAPACITY (CLC):

90,000lb

APPROVALS:

NTEP Certified per H-44, Class III, CC 98-011A2

WARRANTY:

Ten-year limited warranty on the weighbridge
Five-year parts warranty, including lightning protection
Please refer to Warranty Statements starting on page 53

DUE TO THE VARIETY OF CONFIGURATIONS, PLEASE CONSULT THE FACTORY TO DISCUSS APPLICATION REQUIREMENTS AND FOR COMPLETE SPECIFICATIONS AND PRICE QUOTATIONS.