



# RLETS S-Beam, Alloy Steel, Environmentally-sealed, OIML C3, IP67

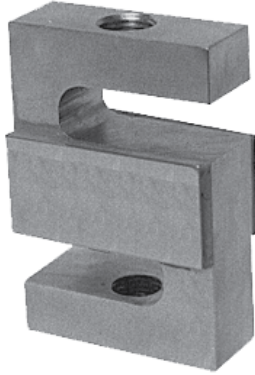

Picture is a representation of actual product

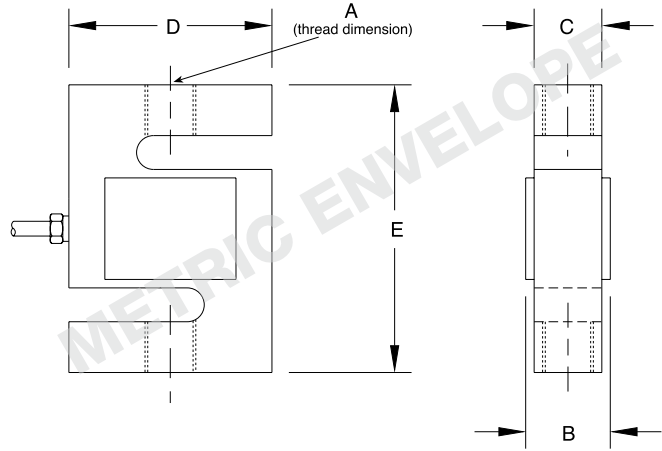

RATED CAPACITY	DIMENSIONS				
	A	B	C	D	E
<b>kg/mm</b>					
250-1000	M12 x 1.75-6H	25.4	19.1	50.8	76.0
2500	M20 x 1.5-6H	31.8	25.4	76.2	108.0
<b>lb/inches</b>					
551.2-2205.0	M12 x 1.75-6H	1.00	.75	2.00	3.00
5512.5	M20 x 1.5-6H	1.25	1.00	3.00	4.25

## SPECIFICATIONS:

Full Scale Output:	3.0 mV/V ±0.25%	Insulation Resistance:	5000 megohms
Bridge Resistance:	350 ohms, nominal	Cable Length:	6 m/19.7'
Material/Finish:	Alloy steel	Cable Color Code:	Red ..... + Excitation Black..... - Excitation Green..... + Signal White ..... - Signal
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C	Warranty:	Two-year limited warranty
Seal Type:	Environmentally-sealed, IP67		
Safe Overload:	150% Full scale		
Rated Excitation:	10V AC/DC (15V maximum)		
Combined Error:	0.02% Full scale		

## RLETS ORDER INFORMATION

Load Rating	Part #	Price
250 kg (551.2 lb)	31254	\$295.00
500 kg (1102.3 lb)	31255	\$295.00
1000 kg (2205.0 lb)	31256	\$295.00
2500 kg (5512.5 lb)	31257	\$460.00