

# Crane/Hanging Scales

## Intercomp CS™ 1500

Crane Scale



### STANDARD FEATURES

- Digital calibration
- Auto shut-off
- NEMA 4 cast aluminum case
- 0.8in LED digital readout
- Recessed push-button switch
- Powered by eight D cell batteries
- Infrared remote control
- NTEP on all capacities

### APPROVALS



### SPECIFICATIONS

#### RESOLUTION:

20 bit A/D delivers more than 1 million internal counts

#### CONTROLS:

Zero, lb/kg, On, Off, Tare, Print, Mode and Set

#### DISPLAY:

0.8in (20mm) 5 1/2in LED

#### INDICATORS:

lb/kg, Gross, Net, Total, and Peak Hold

#### POWER:

(Batteries are not included) eight D size disposable alkaline dry cells or rechargeable nickel-cadmium cells. Battery life up to 100 hours continuous use.

#### ENCLOSURE:

NEMA 4 cast aluminum case

#### HOOK OR EYE:

Crosby-Laughlin or equivalent

#### APPROVALS:

NTEP Certified per H-44, Class III, 3000d; Class III, 5000d, CC# 97-135A4 CE

#### AUTO SHUT-OFF:

Low battery, or after five minutes without use

#### ACCURACY:

±0.1% of reading

#### TEMPERATURE:

Operating -4°F to 140°F (-20°C to 60°C)

#### NOMINAL OVERLOAD:


200% of capacity

#### MAXIMUM OVERLOAD:

500% of capacity

#### WARRANTY:

One-year limited warranty

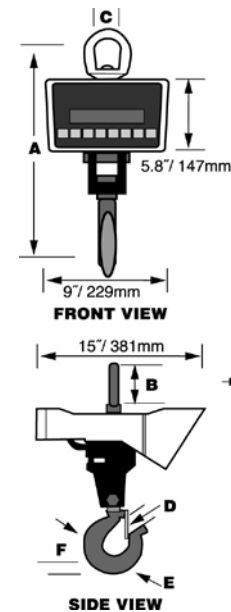

Crane/Hanging Scales

### DIMENSIONS

Part#	Capacity	Graduation	A	B	C	D	E	F	Weight
82447	300lb (150kg)	0.1lb (0.05kg)	10.5in (267mm)	2.38in (61mm)	2in (51mm)	0.97in (25mm)	1.38in (35mm)	0.84in (22mm)	22lb (10kg)
82448	500lb (250kg)	0.2lb (0.1kg)	10.5in (267mm)	2.38in (61mm)	2in (51mm)	0.97in (25mm)	1.38in (35mm)	0.84in (22mm)	22lb (10kg)
43647	1000lb (500kg)	0.5lb (0.2kg)	10.5in (267mm)	2.38in (61mm)	2in (51mm)	0.97in (25mm)	1.38in (35mm)	0.84in (22mm)	22lb (10kg)
43648	2,000lb (1,000kg)	1lb (0.5kg)	11.5in (292mm)	2.38in (61mm)	2in (51mm)	0.97in (25mm)	1.38in (35mm)	0.84in (22mm)	22lb (10kg)
43649	5000lb (2,500kg)	2lb (1kg)	19in (482mm)	2.88in (73mm)	2.25in (57mm)	1.69in (43mm)	2.5in (64mm)	1.82in (46mm)	38lb (17kg)
43650	10,000lb (5,000kg)	5lb (2kg)	19in (482mm)	2.88in (73mm)	2.25in (57mm)	1.69in (43mm)	2.5in (64mm)	1.82in (46mm)	38lb (17kg)
43651	20,000lb (10,000kg)	10lb (5kg)	23in (584mm)	3.5in (90mm)	3.12in (80mm)	2.41in (62mm)	3.25in (83mm)	2.6in (66mm)	45lb (20kg)

## Intercomp CS™ 1500

PART #	DESCRIPTION	EST. SHIP WEIGHT	PRICE
<b>CS1500 (batteries not included):</b>			
82447*	CS1500, 300lb (150kg) x 0.1 lb (0.05 kg)	22 lb	Consult factory
82448*	CS1500, 500lb (250kg) x 0.2 lb (0.1 kg)	22 lb	Consult factory
43647*	CS1500, 1000lb (500kg) x 0.5 lb (0.2 kg)	22 lb	Consult factory
43648*	CS1500, 2000lb (1000kg) x 1 lb (0.5 kg)	22 lb	Consult factory
43649*	CS1500, 5000lb (2500kg) x 2 lb (1 kg)	38 lb	Consult factory
43650*	CS1500, 10,000lb (5000kg) x 5 lb (2 kg)	38 lb	Consult factory
43651*	CS1500, 20,000lb (10000kg) x 10lb (5kg)	45 lb	Consult factory

### OPTIONS/ACCESSORIES

110621	RS-232 serial output		Consult factory
43940	120/220V external charger (batteries not included) for qty 2x4 D-Nicad/NiMH		Consult factory
97443	Battery pack, qty 1x4 D-size-Nicad (spare)		Consult factory
97445	Battery pack, qty 2x4 D-size-Nicad		Consult factory

\* NTEP Certified