


Remote HID Box

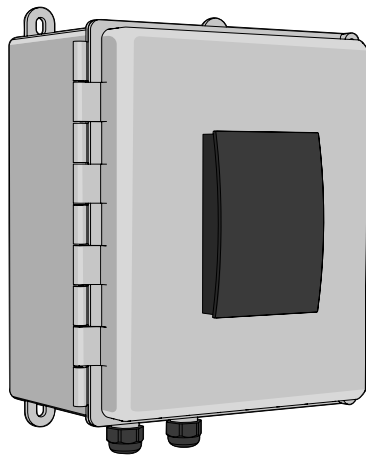

AUTOMATED TICKETING

Standard Features

- Self-contained HID reader with Weigand to RS-232 converter with power supply
- Indoor/outdoor
- Use with 920i, 1280 indicators and kiosk systems
- Requires special programming

Specifications

Typical Maximum Read Range*:

- 2.5 to 4.5 in (6.3 to 11.4 cm) with HID iCLASS® card
- 1.0 in (2.5 cm) with HID iCLASS key
- 1.0 in (2.5 cm) with HID iCLASS tag
- 1.5 to 2.0 in (3.8 to 5.0 cm) with HID iCLASS prox
- 1 to 2 in (2.5 to 5.0 cm) with MIFARE® card (serial number only)

*Using ISO 15693 mode (except MIFARE®).

Dependent upon installation conditions. Please note that all iCLASS credentials are available in either a 2 K bits (256 Bytes) or 16Kbits (2 KBytes) configuration.

Dimensions:

(L × W × H)
10.50 × 8.91 × 6.25 in
(267 × 226 × 159 mm)

Material:
FRP

Specifications Continued

Power Supply:

120 VAC input @ 10W, 5 VDC Output 2 @ Amp

Current Requirements (Avg/Peak):

80/260mA at 12 VDC

Operating Temperature:

-31 °F to 150 °F (-35 °C to 65 °C)

Operating Humidity:

5 to 95% RH (non-condensing)

Weight:

8.8 oz (249.5 g)

Transmit Frequency:

13.56 MHz

Cable Distance:

RS-232-C 50 ft

Pending Certifications:

Taiwan, Singapore, Germany VdS

Approvals Power Supply:

CE Marked
TUV
UL61010/cUL
CSA C22.2 o. 1071
UL1604: Class I Div 2
EN 50175
LVD: EN662368
EMC: Directive EN61204-3
EMI: Class B, EMS Industrial

Pending Approvals HID:

Taiwan, Singapore, Germany VdS

Approvals HID:

UL 294/cUL
FCC Certification
Canada Certification
CE Mark (Europe)
New Zealand
Australia c-Tick

Part Number/Price

Part #	Description	Price
220144	HID Box, remote	Consult

HID Long Range Readers



Standard Features

- Discreet hands-free authentication solution for long range parking, gate control and truck identification
- IP65 rating allows outdoor mounting
- Supports Wiegand standards
- Requires Wiegand converter, consult with a sales engineer with application specifics

Specifications

Dimensions:

(L × W × H)
9.10 × 9.10 × 2.75 in
(231 × 231 × 70 mm)

Color:

Black

Mounting:

Drill mounting box to meet application
Drill points provided for US and EU wall boxes, and 75 mm, 100 mm and 200 mm VESA mounts

Storage Temperature:

-67 °F to 185 °F (-55 °C to 85 °C)

Operating Temperature:

-30 °F to 150 °F (-35 °C to 65 °C)

Operating Humidity:

5% to 95% relative humidity non-condensing

Rating/Material:

IP65
UL94 Polycarbonate

Typical Maximum Read Range:

9.8 to 16.4 ft
(3 to 5 m) (Mexico)

Transmit Frequency:

865 to 868 MHz / 902 to 928 MHz
dependent on regional regulations

Approvals:

UL 294/cUL, CB Scheme
FCC Certification
IC (Canada)
CE (Europe)
IFETEL (Mexico)

Part Number/Price

Part #	Description	Price
184458	Reader, long range HID	Consult
184459	UHF credentials (factory programming required)	Consult
184466	Windshield mount	Consult
220769	Convertor, Weigand/RS232I	Consult