



Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
3 kg	47882	1 lb	Consult
5 kg	47883	1 lb	Consult
7 kg	47884	1 lb	Consult
10 kg	47885	1 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F
kg/mm						
3 to 10	117.9	93.7	25.4	33.3	32.5	1/4-20 UNC x 10 DP

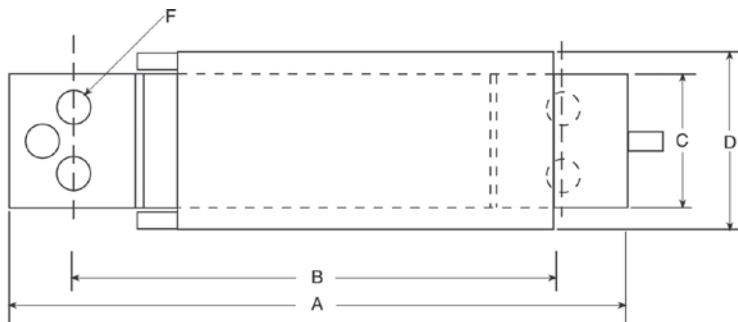

Specifications

- Full Scale Output:**
2.0 mV/V
- Output Resistance:**
350 (± 3) ohm
- Input Resistance:**
415 (± 15) ohm
- Material/Finish:**
Anodized aluminum
- Temperature:**
Operating range
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Environmentally sealed, IP65
- Safe Overload:**
150% full scale
- Rated Excitation:**
5 to 10 VDC (15 V maximum)
- Combined Error:**
0.02% full scale
- Insulation Resistance:**
5,000 megohm
- Deflection at Capacity:**
0.015 in
- Cable Length:**
1 m
- Cable Diameter:**
0.200 in PVC jacket
- Cable Color Code:**
Green +Excitation
Black -Excitation
Red +Signal
White -Signal
Blue +Sense
Brown -Sense
- Platform Size:**
13.78 x 13.78 in
- Warranty:**
One-year limited
- Approvals:**
cFMus
OIML

VPG
TEDEA-HUNTLEIGH