

Picture is a representation of actual product

Approvals










ироп request


Order Information

Load Rating	Part#	Est. Weight	Price
5 kg	30165	2 lb	Consult
10 kg	30166	2 lb	Consult
20 kg	30167	2 lb	Consult
50 kg	30168	2 lb	Consult
100 kg	30169	2 lb	Consult
200 kg	30170	2 lb	Consult
500 kg	36463	2 lb	Consult

Dimensions

Rated Capacity	A	В	С	D	E	F	G	н	J	K	М	N
kg/mm												
5 to 500	120.0	40.0	23.0	32.0	20.5	45.5	10.0	82.0	18.0	20.0	20.0	8.2

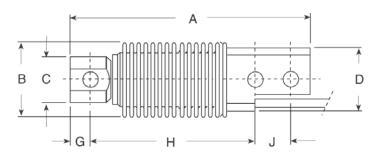

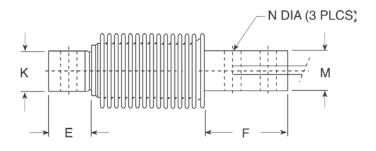

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RL9018SS......page 109

VPG® REVERE

HBK®

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS

RL1700 HE page 29

Specifications

Full Scale Output: 2.0 mV/V

Output Resistance:

355 (± 5) ohm

Input Resistance:

380 (± 10) ohm

Material/Finish:

Stainless steel

Temperature:

Compensated:

14 °F to 104 °F (-10 °C to 40 °C) Operating:

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Welded-seal, IP68

Safe Overload: 150% full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Combined Error:

0.02% full scale

Insulation Resistance: 2,000 megohm

Deflection at Capacity:

Cable Length:

3 m

Cable Diameter:

5.5 mm

Polyurethane jacket

Cable Color Code:

Blue +Excitation

Black -Excitation White +Signal

Red –Signal

Green +Sense

Grey -Sense

Warranty:

One-year limited

Approvals:

OIML (Available upon request)

Ex (Available upon request)