



Picture is a representation of actual product

Approvals



Available
upon
request


Available
upon
request

Order Information

Load Rating	Part #	Est. Weight	Price
Alloy Steel			
1,000 lb	29903	3 lb	Consult
2,500 lb	29904	3 lb	Consult
4,000 lb	29905	3 lb	Consult
5,000 lb	29906	4 lb	Consult
Stainless Steel			
1,000 lb	47871	3 lb	Consult
2,500 lb	47872	3 lb	Consult
4,000 lb	47873	3 lb	Consult
5,000 lb	47874	4 lb	Consult
10,000 lb	47875	4 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	F	G	H	H1	I
lb/in									
1,000 to 4,000	0.53	1/2-20 UNF	1.24	2.25	3.00	0.63	1.00	0.60	5.12
5,000 to 10,000	0.78	3/4-16 UNF	1.49	3.00	3.75	0.75	1.50	0.75	6.75

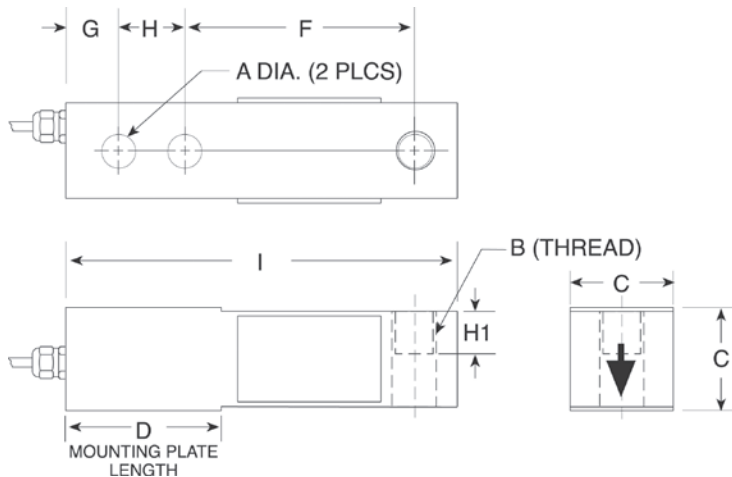

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS
RL30000Ipage 110

RICE LAKE WEIGHING SYSTEMS
RL39123*page 113

VPG® REVERE
5123page 246

VPG REVERE
9123*page 247

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS
RL50210TApage 37

RICE LAKE WEIGHING SYSTEMS
RL1800 Seriespage 48

*Stainless steel

Specifications

Full Scale Output:
3.0 mV/V

Output Resistance:
351 (± 5) ohm

Input Resistance:
385 (± 10) ohm

Material/Finish:
High-alloy, nickel plated
Stainless steel

Temperature:
Compensated:
14 °F to 104 °F (-10 °C to 40 °C)
Operating:
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:
Environmentally sealed, IP67

Safe Overload:
150% full scale

Safe Sideload:
100% full scale

Rated Excitation:
5 to 10 VDC (15 V maximum)

Combined Error:
0.03% full scale

Insulation Resistance:
2,000 megohm

Deflection at Capacity:
0.015 in

Cable Length:
10 ft

Cable Diameter:
0.200 in
PVC jacket

Cable Color Code:
Red +Excitation
Black -Excitation
Green +Signal
White -Signal
Blue +Sense
Brown -Sense

Warranty:
One-year limited

Approvals:
NTEP
OIML (Available upon request)
cFMus
Ex (Available upon request)