


WIRING TABLE		
RJ-45 CONNECTOR	CABLE COLOR	PC RJ-45 CONNECTOR
PIN 7	BROWN	PIN 1
PIN 8	BLUE	PIN 2
PIN 5	YELLOW	PIN 3
NC	GREEN	PIN 4
NC	RED	PIN 5
PIN 4	BLACK	PIN 6
NC	ORANGE	PIN 7
NC	GREY	PIN 8

REVISIONS			
REV	REFERENCE	INIT	DATE

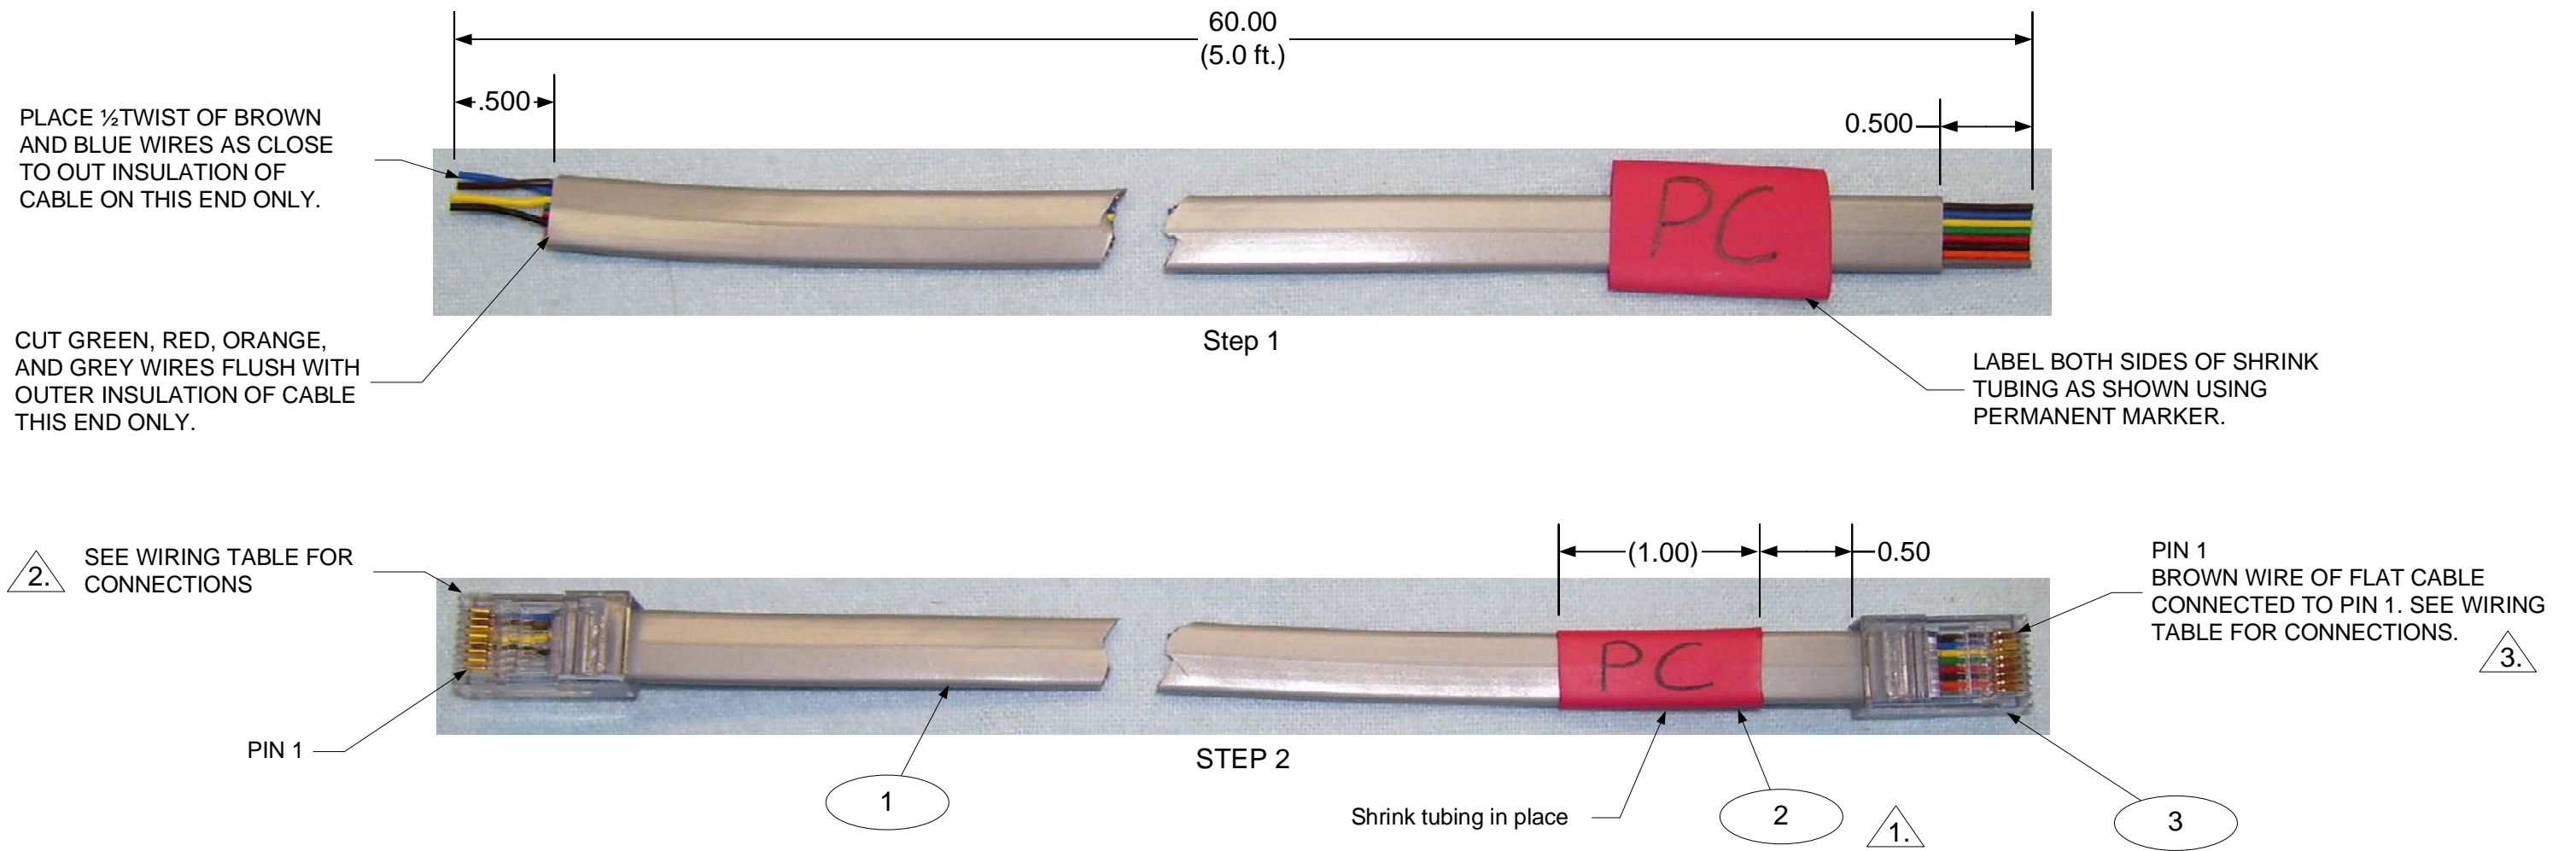

1. HEAT SHRINK -  $\phi$ .375 - 1.00

MATERIAL		UNLESS OTHERWISE SPECIFIED UNITS TO BE INCHES ALL THREADS TO BE CLASS 2 ALL DIMENSIONS APPLICABLE AFTER TREATMENT		THIS DRAWING AND ALL INFORMATION CONTAINED HEREIN IS AND REMAINS THE PROPERTY OF RICE LAKE WEIGHING SYSTEMS INC. AND IS CONFIDENTIAL. IT IS SUBMITTED AND MAY BE USED ONLY IN CONNECTION WITH RICE LAKE WEIGHING SYSTEMS' PROPOSAL AND/OR ITS CUSTOMERS' ORDERS. IT SHALL NOT BE DISCLOSED TO OTHERS OR COPIED WITHOUT RICE LAKE WEIGHING SYSTEMS' SPECIFIC WRITTEN CONSENT AND SHALL BE IMMEDIATELY RETURNED UPON REQUEST.	
SEE BILL OF MATERIALS		DO NOT SCALE DRAWING	DRAWING TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE <b>CABLE ASSEMBLY PC TO BC-4000</b>
TREATMENT NONE		FOR RLWS USE ONLY	SURFACE FINISH	TOL. DECIMAL	
THIRD ANGLE PROJECTION		0	---	2 PLC .25 3 PLC .060 ANGLE ---	
MFG. ENG. APPROVED PJM 7-13-07		CKD.		RICE LAKE WEIGHING SYSTEMS	
DES. ENG. APPROVED PJM 7-13-07		DR. BY PJM 7-13-07		SCALE ---	DWG NO 101392
				SHEET 1 OF 1	REVISION NEW