



# **BARIATRIC HANDRAIL SCALES**

# 250-10-2

## BARIATRIC HANDRAIL SCALE

Rice Lake's 250-10-2 bariatric scale with handrail is designed for weighing patients who need extra support and safety. Advanced movement compensation technology eliminates error caused by involuntary movement of unsteady patients. Two heavy-duty rear wheels make it simple and effortless to move and store.

### FEATURES

- Handrail for support and safety
- Two wheels for ease of portability
- Large 1-inch LCD display
- Nonskid platform
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EHR capable
- USB or Bluetooth® BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

### SPECIFICATIONS

**Capacity:**

1,000 × 0.2 lb (450 × 0.1 kg)

**Platform Dimensions:**

(W × L × H) 20 × 25 × 3 in

**Power:**

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

**Battery Type:**

Six AA alkaline (included)

**Battery Use:**

25 hours continuous use with batteries  
Automatic power-off can be configured

**Operating Temperature:**

50 °F to 104 °F (10 °C to 40 °C)

**Display:**

5-digit LCD display, 0.75 in (1.9 cm) digit height

**Approvals:**

c-Met, E113986

**Warranty:**

Two-year limited





## BARIATRIC HANDRAIL SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
250-10-2	1,000 × 0.2lb (450 × 0.1kg)	USB	133119
250-10-2BLE	1,000 × 0.2lb (450 × 0.1kg)	Bluetooth® BLE 4.0	194733

## OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching c-MET* Medical grade power supply	115655
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830

\*NEMA 1-15 Plug



\*\*CEE 7/16 Plug




## SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
250-10-2	133119	45	29	9	66	85	85
250-10-2BLE	194733	45	29	9	66	85	85

## DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
<b>A</b>	20.0	50.8	<b>E</b>	34.0	86.4
<b>B</b>	25.0	63.5	<b>F</b>	44.5	113.0
<b>C</b>	3.0	7.6	<b>G</b>	21.0	53.3
<b>D</b>	25.0	63.5			

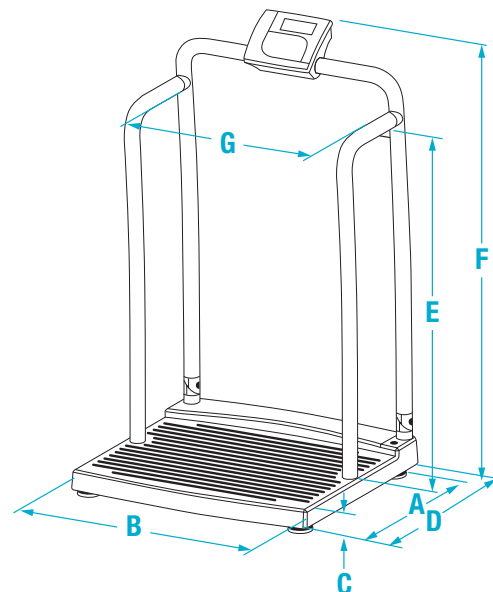

PG  
27





WITH SEAT

# 250-10-4

## BARIATRIC HANDRAIL SCALE

Rice Lake's 250-10-4 bariatric scale with handrail and chair seat is designed for weighing patients who need extra support and safety during weighments. Patients can be weighed comfortably and safely while seated with the large, stable folding seat. Advanced movement compensation technology eliminates error caused by involuntary movement of unsteady patients. Two heavy-duty rear wheels make it simple and effortless to move and store.

### FEATURES

- Handrail for support and safety
- Folding seat
- Two wheels for ease of portability
- Large 1-inch LCD display
- Nonskid platform
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EHR capable
- USB or Bluetooth® BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

### SPECIFICATIONS

**Capacity:**  
1,000 × 0.2 lb (450 × 0.1 kg)

**Platform Dimensions:**  
(W × L × H)  
20 × 25 × 3 in

**Power:**  
9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

**Battery Type:**  
Six AA alkaline (included)

**Battery Use:**  
25 hours continuous use with batteries  
Automatic power-off can be configured

**Operating Temperature:**  
50 °F to 104 °F (10 °C to 40 °C)

**Display:**  
5-digit LCD display, 0.75 in (1.9 cm) digit height

**Approvals:**  
c-Met, E113986

**Warranty:**  
Two-year limited





## BARIATRIC HANDRAIL SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
250-10-4	1,000 × 0.2lb (450 × 0.1 kg)	USB	133120
250-10-4BLE	1,000 × 0.2lb (450 × 0.1 kg)	Bluetooth® BLE 4.0	194734

## OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching c-MET* Medical grade power supply	115655
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6 ft	186830

\*NEMA 1-15 Plug



\*\*CEE 7/16 Plug




## SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
250-10-4	133120	32	27	46	70	286	286
250-10-4BLE	194734	32	27	46	70	286	286

## DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
<b>A</b>	2.8	7.0	<b>E</b>	32.0	81.1
<b>B</b>	25.7	65.3	<b>F</b>	47.5	120.7
<b>C</b>	25.2	64.0	<b>G</b>	20.0	50.8
<b>D</b>	21.6	54.9	<b>H</b>	12.0	30.5

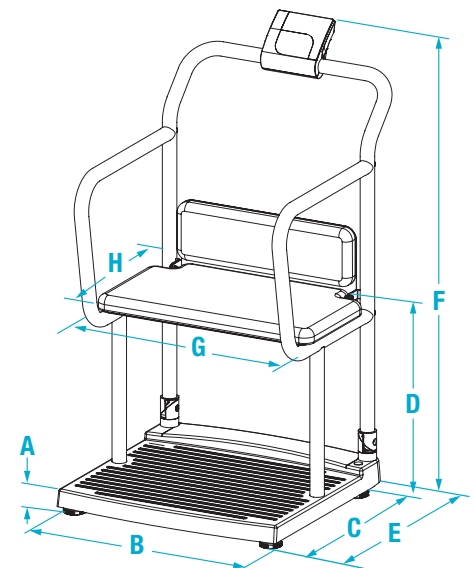

# 260-10-1

## BARIATRIC HANDRAIL SCALE

Rice Lake's 260-10-1 bariatric scale with handrail is designed for weighing patients who need extra support and safety. Height and weight can be seamlessly captured with the optional integrated height rod. Advanced movement compensation technology eliminates error caused by involuntary movement of unsteady patients. Two heavy-duty rear wheels make it simple and effortless to move and store.

### FEATURES

- Handrail for support and safety
- Two wheels for ease of portability
- Large 1-inch LCD display
- Nonskid platform
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EHR capable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated
- Optional height rod can be installed on-site

### SPECIFICATIONS

**Capacity:**  
800 × 0.2 lb (360 × 0.1 kg)

**Platform Dimensions:**  
(W × L × H)  
24 in x 24 in x 2.75 in

**Height Rod Dimensions:**  
30 to 83.125 in (77 to 211 cm)

**Power:**  
9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

**Battery Type:**  
Six AA alkaline (included)

**Battery Use:**  
25 hours continuous use with batteries  
Automatic power-off can be configured

**Display:**  
5-digit LCD display, 0.75 in (1.9 cm) digit height

**Operating Temperature:**  
50 °F to 104 °F (10 °C to 40 °C)

**Warranty:**  
Two-year limited





## BARIATRIC HANDRAIL SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
260-10-1	800 × 0.2lb (360 × 0.1 kg)	USB	170139

## OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Height rod 25.5-83 in (65-211 cm)	172958
Epson TM-U220 tape printer	81076
Printer cable, 25-pin D-Sub male to RJ-45, 6ft	186830

\*NEMA 1-15 Plug



\*\*CEE 7/16 Plug



## SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
260-10-1	170139	40	40	10	58	116	116
Height Rod	172958	33	9	3	3	7	7

## DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
<b>A</b>	24.0	61.0	<b>D</b>	25.5	65.0
<b>B</b>	24.0	61.0	<b>E</b>	33.5	85.0
<b>C</b>	2.75	7.0	<b>F</b>	43.0	109.0

