



Part Number/Price

Part #	Description	Price
91783	JB8SPT signal trim junction box with transient protection	Consult
89889	Board only	Consult
89894	Transient board	Consult
165273	Enclosure only (does not include cord grips and filter)	Consult




Note: Do not mix junction box models or use other brands of junction boxes with Rice Lake junction boxes. There is a risk of system instability.

Options/Accessories


Part #	Description	Price
215178	Mounting tabs-new style (set of 4, includes screws), polycarbonate	Consult
92734	Coupling, 1/2-in NPT cord grip to 3/4-in NPT conduit fitting	Consult
92735	Coupling, 3/8-in NPT cord grip to 3/4-in NPT conduit fitting	Consult

Dimensions

JB8SP	
A	12.13 in
B	11.45 in
C	11.38 in
D	10.59 in
E	9.32 in
F	5.98 in
G	6.95 in
H	7.20 in
I	5.70 in
J	3.80 in
K	2.30 in

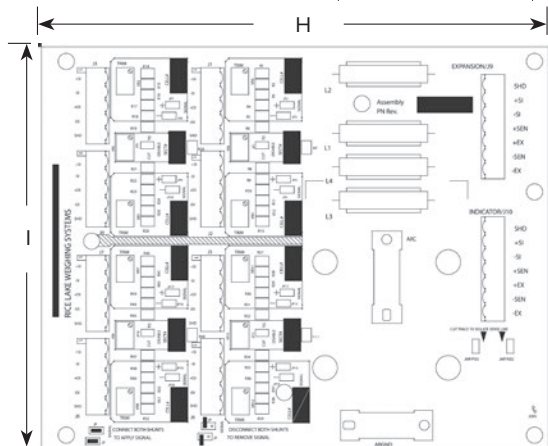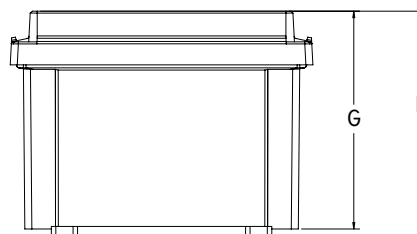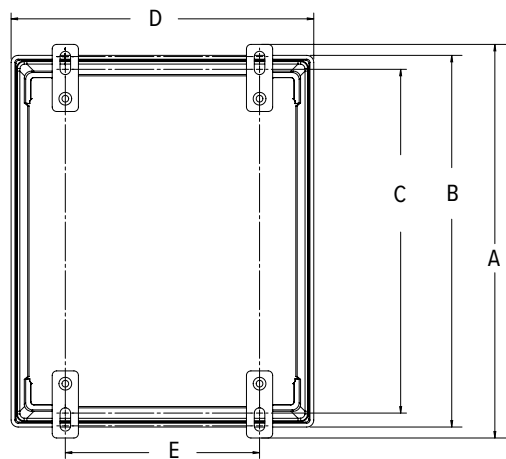

Load Cell Board

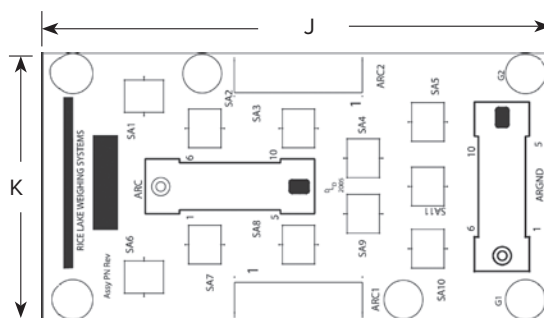

Transient Board

Standard Features

- Transient protection
- PreVent™ breather vent
- Conformal-coated circuit board
- Removable load cell connectors
- Section and individual cell trim capability
- Field replaceable transient protection
- One coupling, 0.5 inch NPT cord grip to 0.75-inch NPT conduit fitting for homerun cable
- Connect two, four, six or eight single load cells (even number of cells only)
- Expansion port

Applications

- Truck, livestock and railroad scales

Specifications

Cable Fittings:

- (9) 3/8 in NPT 0.157 to 0.314 in
- (2) 1/2 in NPT 0.272 to 0.472 in

Rating/Material:

NEMA Type 4X
Polycarbonate with overlapping solid cover, stainless steel screws

Connectors:

Pluggable screw type, 12 to 28 AWG

Trimming:

Individual cell trim

Temperature:

Operating:
0 °F to 122 °F (-18 °C to 50 °C)

Potentiometers:

100,000 ohm, 25-turn cermet

Circuit Board:

5.7 × 7.2 in with conformal coating

Warranty:

One-year limited