


ControlNet™ Interface

820i®/920i®

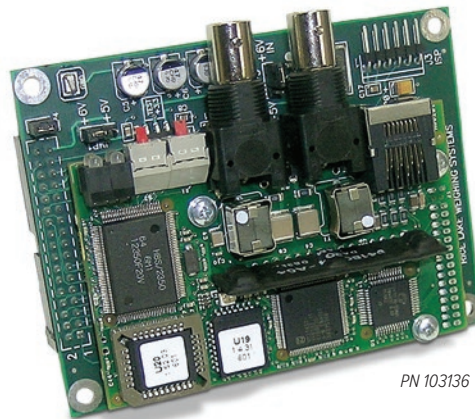

PN 103136

Standard Features

- Option for 820i and 920i
- Polled I/O connection
- Onboard LED diagnostics
- Floating-point commands support decimal points

Specifications

Dimensions:

2.13 x 3.38 x 0.59 in (86 x 54 x 15 mm)

Power:

5 VDC, 350 mA (jumper for 6 VDC)

Fieldbus Interface:

BNC connector

Diagnostic LEDs:

TX/RX data, Good link, Status, Diagnostics

Operating Temperature:

14°F to 158°F (-10°C to 70°C)

Part Number/Price

Part #	Description	Price
103136	ControlNet interface for use with 820i/920i	Consult
Cables		
Consult factory for coaxial cable with cord grips		

Options/Accessories

Part #	Description	Price
103122	Additional operating manual (820i/920i)	Consult

Standard Features

- Industrial Protocol for Allen-Bradley PLC and other EtherNet/IP compliant devices
- IP address settings configurable with on-board DIP switched, web page, or ARP or DHCP
- Supports Rockwell Automation® EtherNet/IP Level
- CE marked and UL conformance
- Onboard diagnostic LED
- Supports the Modbus/TCP protocol and conforms to Modbus/TCP specification 1.0

Specifications

Dimensions:

2.13 x 3.38 x 0.59 in
(86 x 54 x 15 mm)

Power:

5 VDC, 350 mA

Fieldbus Interface:

RJ-45

Diagnostic LEDs:


Link status, module status, network status, activity

Operating Temperature:

14°F to 158°F (-10°C to 70°C)

EtherNet/IP® Interface

720i™/820i®/920i®

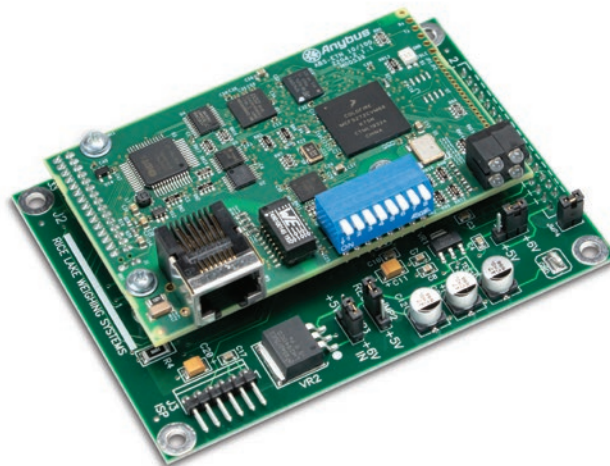

PN 87803

Part Number/Price

Part #	Description	Price
87803	EtherNet/IP protocol card for 720i/820i/920i	Consult

Options/Accessories

Part #	Description	Price
88537	Additional operating manual	Consult