



Picture is a representation of actual product.

Approvals




Order Information

| Load Rating | Part # | Est. Weight | Price |
|-------------|---------------|-------------|---------|
| 7 kg | 202686 | 2 lb | Consult |
| 10 kg | 202687 | 2 lb | Consult |
| 30 kg | 202688 | 2 lb | Consult |
| 60 kg | 202689 | 2 lb | Consult |
| 100 kg | 202690 | 2 lb | Consult |
| 150 kg | 202691 | 2 lb | Consult |

Dimensions

| Rated Capacity | A | B | C | D | E | F | G |
|----------------|------|-------|------|-----|------|------------|------|
| kg/mm | | | | | | | |
| 7 to 10 | 18.2 | 140.0 | 19.0 | 6.4 | 88.9 | 1/4-20 UNC | 30.0 |
| 30 to 60 | 24.5 | 140.0 | 19.0 | 6.4 | 88.9 | 1/4-20 UNC | 30.0 |
| 100 to 150 | 30.8 | 140.0 | 22.4 | 7.8 | 79.3 | 3/8-16 UNC | 30.0 |

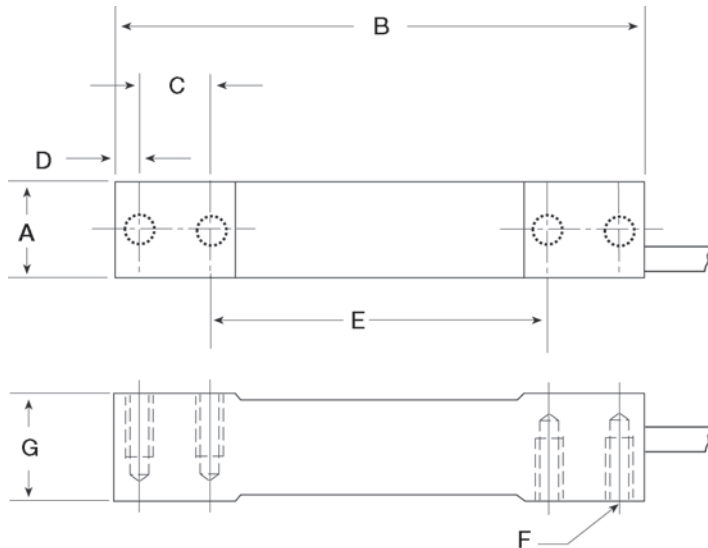

Interchangeable Products

- RICE LAKE WEIGHING SYSTEMS
- RL1380**..... page 176
- HBK
- PWS**..... page 245

Specifications

- Full Scale Output:**
2 mV/V
- Output Resistance:**
350 (± 10) ohm
- Input Resistance:**
385 (± 15) ohm
- Material Finish:**
Stainless Steel
- Temperature Compensation:**
Compensated Range
14 °F to 104 °F (-10 °C to 40 °C)
Operating Range
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Environmentally Sealed, IP67
- Safe Overload:**
150% full scale
- Rated Excitation:**
5 to 10 VDC
- Insulation Resistance:**
5,000 megohm
- Max Platform Size:**
7 to 30 kg: 350 × 350 mm
60 to 150 kg: 450 × 450 mm
- Combined Error:**
0.02% full scale
- Cable Length:**
10 ft
- Cable Diameter:**
0.140 in
Polyurethane jacket
- Color Code:**
Green +Excitation
Black -Excitation
White +Signal
Red -Signal
Yellow Shield
- Warranty:**
One-year limited
- Approvals:**
FM
NTEP
OIML