

Stainless Steel, Environmentally Sealed, NTEP Certified 1:4,000 Class III Single Cell/1:7,500 Class III Multiple Cell, OIML C3, IP67



Picture is a representation of actual product.

Approvals








Order Information: Blind Hole

Load Rating	Part#	Est. Weight	Price
200 lb	77422	3 lb	Consult
500 lb	77423	3 lb	Consult
1,000 lb	68527	3 lb	Consult
2,500 lb	68528	3 lb	Consult
5,000 lb	68529	3 lb	Consult

Dimensions

Rated Capacity	D	F	G	Н	I .	P	S
lb/mm							
200 to 5,000	12.9	136.3	12.7	25.4	76.2	61.5	30.2

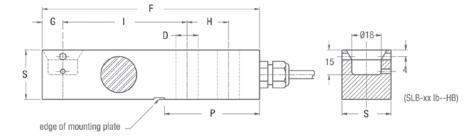

Interchangeable Products

FAIRBANKS®*

LCF-HR4050-3

*Stainless overbraid cable

Specifications

Full Scale Output:

2.0 mV/V mV/V/ohm calibration

Output Resistance:

1,000 (± 2) ohm

Input Resistance:

1,100 (± 50) ohm

Material/Finish:

Stainless steel

Temperature:

Compensated: 14 °F to 104 °F (-10 °C to 40 °C)

Operating:

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP67

Combined Error: 0.01% full scale

Safe Overload:

200% full scale

Safe Sideload:

100% full scale

Rated Excitation: 5 to 15 VDC

Insulation Resistance:

5,000 megohm

Cable Length:

10 ft

Cable Diameter: 0.196 in

Polyurethane jacket Cable Color Code:

Green +Excitation

Black -Excitation

White +Signal

Red –Signal Yellow Shield

Warranty:

One-year limited

Approvals:

NTEP OIML FM