RoughDeck[®] BDP Stainless Steel

Barrel, Drum, Pallet Scale - Stationary Model



Part Number/Price

Part #	Size (W ×LW)	Capacity (Canadian Approved Capacities)	Price			
77967	30 × 31 in	1,000 lb (500 kg)	205lb	Consult		
77968	30 × 31 in	2,500 lb (1,000 kg)	205lb	Consult		
77969	36 × 37 in	1,000 lb (500 kg)	265lb	Consult		
77970	36 × 37 in	2,500 lb (1,000 kg)	265lb	Consult		
Part #	Size (W ×LW)	Ramp Angle of Incline	Est. Weight	Price		
Access Ramps						
78013	30 × 12 in (sold individually)	7.2° 25 lb		Consult		
78014	36 × 12 in (sold individually)	7.2°	30 lb	Consult		

Options/Accessories

Part #	Description	
18778	Floor anchor plates, stainless steel, set of 2 (for use with static scale, without ramps)	Consult
28740	Floor stand for indicator, 36.3 in high, stainless steel (for use with static scale)	Consult
Consult	Stainless steel deck with RL32218S-HE hermetically sealed IP69K stainless steel (cFMus approved) load cells and hardware	
Consult	Stainless steel diamond treadplate safety deck	Consult
214614	Back stop and mounting hardware for 30" wide scale	Consult
214615	Back stop and mounting hardware for 36" wide scale	Consult

Dimensions

RoughDeck BDP stainless steel with access ramp							
30× 31 in models							
30.0 in	D	3.31 in					
31.0 in	G	30.0 in					
40.0 in	Н	12.0 in					
36 × 37 in models							
36.0 in	D	3.31 in					
37.0 in	G	36.0 in					
46.0 in	Н	12.0 in					
	h access ramp 31 in models 30.0 in 31.0 in 40.0 in 37 in models 36.0 in 37.0 in	h access ramp 31 in models 30.0 in D 31.0 in G 40.0 in H • 37 in models 36.0 in D 37.0 in G					

Distance from floor to top of center weighing surface: 1.625 in Distance from floor to bottom of weighing surface: 0.31 in Note: 1 in=25.4 mm

Standard Features

- Live siderails
- Top -access foot adjustment holes
- Four adjustable stainless steel SUREFOOT[™]
- support feet
- Smooth top plate • Stainless steel, IP66 load cells

Specifications

End Load Capacity: 1,000 lb: 100% full scale 2,500 lb: 80% full scale

Cable Length:

10 ft (3 m)

Scale Weldment: AISI304L, glass bead blasted for even appearance

Junction Box:

TuffSeal® JB4SS stainless steel, NEMA Type 4X junction box with signal trim card

Welding:

Stitch, consult factory if continuous is required Threaded Eyebolt:

Holes are 1/2-13 threaded for lifting scale

Warranty (limited):


Weldment: Five-year

- Load cells: Two-year All other components: One-year
- Approvals:

NTEP CC 03-060, Class III 2,500 d Measurement Canada AM-5578 (500 kg) Class III 2,500 d (1,000 kg) Class III 2,000 d



Scale shown with bumper quard

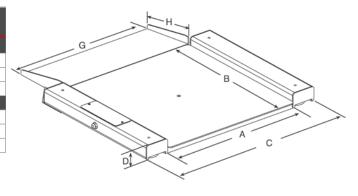

FLOOR SCALES

