



Picture is a representation of actual product.

**Approvals**




**Order Information**

Load Rating	Part #	Est. Weight	Price
7 kg	36185	2 lb	Consult
10 kg	36186	2 lb	Consult
15 kg	36187	2 lb	Consult
30 kg	36188	2 lb	Consult
60 kg	36189	2 lb	Consult
100 kg	68551	2 lb	Consult
150 kg	69345	2 lb	Consult

**Dimensions**

Rated Capacity	A	B	C	D	E	F	G
kg/mm							
7 to 15	30.2	139.7	19.1	6.4	88.9	1/4-20 UNC	19.1
30 to 60	30.2	139.7	19.1	6.4	88.9	1/4-20 UNC	23.9
100 to 150	30.2	139.7	22.3	7.8	79.2	3/8-16 UNC	30.7

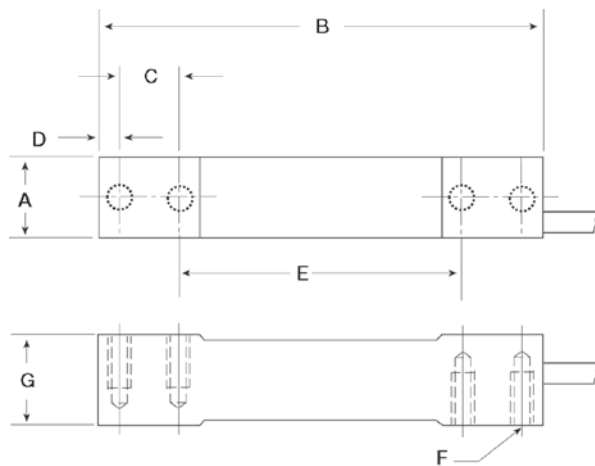

**Interchangeable Products**

- RICE LAKE WEIGHING SYSTEMS  
**RL1380**..... page 176  
 FLINTEC®  
**PC3**..... page 230

**Specifications**

**Full Scale Output:**  
2.0 mV/V

**Output Resistance:**  
359 (± 10) ohm

**Input Resistance:**  
390 (± 15) ohm

**Material/Finish:**  
Stainless steel

**Temperature:**  
Compensated range  
14 °F to 104 °F (-10 °C to 40 °C)  
Operating range  
0 °F to 150 °F (-18 °C to 65 °C)

**Seal Type:**  
Environmentally sealed, IP67

**Safe Overload:**  
150% full scale

**Rated Excitation:**  
5 to 10 VDC (15 V maximum)

**Combined Error:**  
0.03% full scale

**Insulation Resistance:**  
5,000 megohm

**Cable Length:**  
10 ft

**Cable Diameter:**  
0.190 in  
Polyurethane jacket

**Deflection:**  
< 0.4 mm full scale

**Cable Color Code:**  
Green +Excitation  
Black -Excitation  
White +Signal  
Red -Signal  
Yellow Shield

**Warranty:**  
One-year limited

**Approvals:**  
FM  
NTEP  
OIML

