



Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
15 kg	17451	3 lb	Consult
30 kg	17452	3 lb	Consult
75 kg	17485	3 lb	Consult
100 kg	17453	3 lb	Consult
150 kg	36466	3 lb	Consult

Dimensions

Rated Capacity	H	L	L1	L2	L3	T	T1	W	W1
kg/mm									
15 to 150	40.0	150.0	5.95	19.1	100.0	1/4-20 UNC x 10 DP	1/4-28 UNF x 10 DP	25.4	29.4

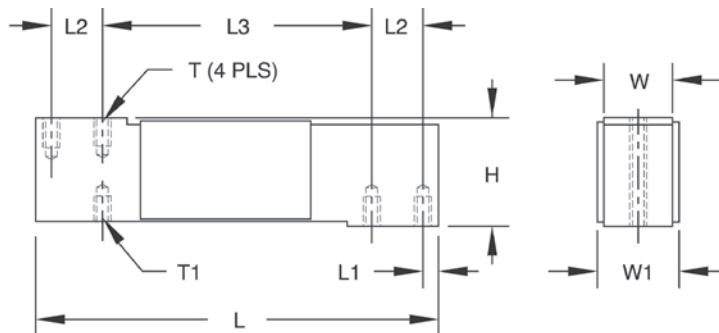

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RL1140 page 163

Specifications

Full Scale Output:

2.0 mV/V

Output Resistance:

350 (± 5) ohm

Input Resistance:

383 (± 15) ohm

Material/Finish:

Stainless steel

Temperature:

Compensated:

14 °F to 104 °F (-10 °C to 40 °C)

Operating:

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP65

Safe Overload:

150% at center loading point, full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Combined Error:

0.02% full scale

Insulation Resistance:

2,000 megohm

Deflection at Capacity:

0.015 in

Cable Length:

10 ft

Cable Color Code:

Green +Excitation

Black -Excitation

Red +Signal

White -Signal

Blue +Sense

Brown -Sense

Max Platform Size:

15.75 x 15.75 in

Warranty:

One-year limited

Approvals:

cFMus