



Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
1,000 lb	21538	5 lb	Consult
2,000 lb	21539	5 lb	Consult
5,000 lb	21540	5 lb	Consult
10,000 lb	21541	10 lb	Consult

Dimensions

Rated Capacity	C	W	C1	H	L	L1	L2	L3	L4	CONDUIT ADAPTER
lb/in										
1,000 to 5,000	0.53	1.44	1.19 x 0.56 DP	1.88	8.00	4.00	0.75	2.50	3.87	1/4-18NPT
10,000	0.88	1.88	1.63 x 0.62 DP	2.75	9.25	4.62	0.81	2.62	4.87	1/4-18NPT

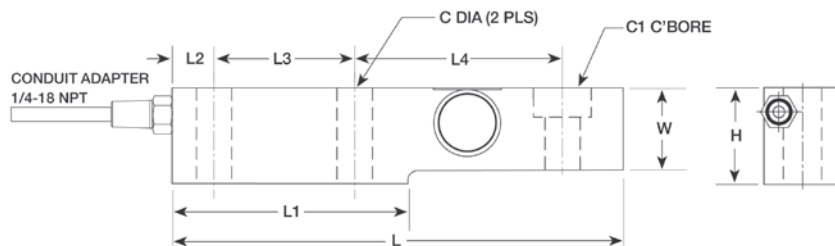

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RLSSB.....page 116

HBK®

SB3.....Discontinued

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS

RL1900 Series.....page 51

Specifications

Full Scale Output:

2.0 mV/V

Output Resistance:

350 (± 3.5) ohm

Input Resistance:

350 (± 3.5) ohm

Material/Finish:

Stainless steel

Temperature:

Compensated:

14 °F to 104 °F (-10 °C to 40 °C)

Operating:

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Welded-seal, IP67

Safe Overload:

150% full scale

Safe Sideload:

100% full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Combined Error:

0.02% full scale

Non-repeatability:

0.01% full scale

Insulation Resistance:

5,000 megohm

Deflection at Capacity:

0.018 in

Cable Length:

15 ft

Cable Color Code:

Green +Excitation

Black -Excitation

White +Signal

Red -Signal

Warranty:

One-year limited

Approvals:

NTEP

cFMus