


BenchMark™

Mild Steel

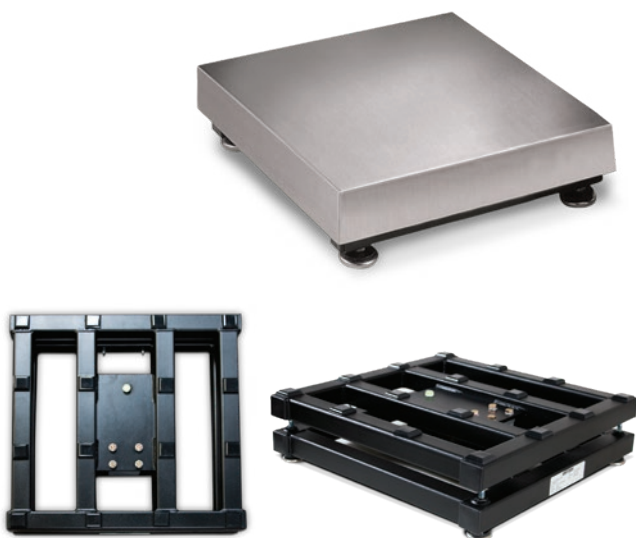

Specifications

Load Cell, OIML Certified:

Aluminum, environmentally sealed

Output Impedance:

350 ohms

Overload Protection:

Five point, independently adjusted

Cable Length:

3 m

Compensated Temperature Range:

-10° C to 40° C

Warranty:

Two-year limited warranty

Standard Features

- 304 stainless steel construction
- LifeGuard™ base design isolates load cell from overloads and shock loads for added durability
- Specially designed adjustable support feet provide exceptional traction and will not scratch surfaces

Approvals



Additional models are available with the approvals shown here
Please consult the factory for part numbers.



Measurement
Canada
Approved



Part Number/Price

Part #	Capacity	Dimensions	Est. Weight	Price
124326	15 kg	305 x 305 x 105 mm	9 kg	Consult
124327	30 kg	305 x 305 x 105 mm	9 kg	Consult
124329	30 kg	305 x 457 x 105 mm	16,8 kg	Consult
124331	30 kg	457 x 457 x 133 mm	31 kg	Consult
124339	30 kg	457 x 610 x 133 mm	35,4 kg	Consult
124328	60 kg	305 x 305 x 133 mm	9 kg	Consult
124330	60 kg	305 x 457 x 133 mm	16,8 kg	Consult
124332	60 kg	457 x 457 x 133 mm	31 kg	Consult
124340	60 kg	457 x 610 x 133 mm	35,4 kg	Consult
124347	60 kg	610 x 610 x 133 mm	38 kg	Consult
124336	150 kg	457 x 457 x 133 mm	31 kg	Consult
124344	150 kg	457 x 610 x 133 mm	35,4 kg	Consult
124351	150 kg	610 x 610 x 133 mm	38 kg	Consult
124337	300 kg	457 x 457 x 133 mm	31 kg	Consult
124345	300 kg	457 x 610 x 133 mm	35,4 kg	Consult
124352	300 kg	610 x 610 x 133 mm	38 kg	Consult

Options/Accessories

Part #	Description	Price
112044	305 mm column for CW-90, CW-90X, 480 and 482 Legend™ Series	Consult
112045*	457 mm column for CW-90, CW-90X, 480 and 482 Legend™ Series	Consult
64576	Attachment bracket for 480 and 482 Legend™ Series	Consult
22125	Additional operating manual	Consult
N/A	Installation, testing, configuration and verification	Consult factory

* Not recommended for use with scale bases smaller than 305 x 305 mm

Dimensions

Part #	Capacity	Platform Size L/W	L1	W1	H
124326	15 kg	305 x 305 mm	318 mm	318 mm	105 mm
124327	30 kg	305 x 305 mm	318 mm	318 mm	105 mm
124329	30 kg	305 x 457 mm	318 mm	476 mm	105 mm
124331	30 kg	457 x 457 mm	476 mm	476 mm	133 mm
124339	30 kg	457 x 610 mm	476 mm	629 mm	133 mm
124328	60 kg	305 x 305 mm	318 mm	318 mm	133 mm
124330	60 kg	305 x 457 mm	318 mm	476 mm	133 mm
124332	60 kg	457 x 457 mm	476 mm	476 mm	133 mm
124340	60 kg	457 x 610 mm	476 mm	629 mm	133 mm
124347	60 kg	610 x 610 mm	629 mm	629 mm	133 mm
124336	150 kg	457 x 457 mm	476 mm	476 mm	133 mm
124344	150 kg	457 x 610 mm	476 mm	629 mm	133 mm
124351	150 kg	610 x 610 mm	629 mm	629 mm	133 mm
124337	300 kg	457 x 457 mm	476 mm	476 mm	133 mm
124345	300 kg	457 x 610 mm	476 mm	629 mm	133 mm
124352	300 kg	610 x 610 mm	629 mm	629 mm	133 mm

