

# Crane Scales

**TABLE OF CONTENTS**

**MSI-3460 Challenger 3 .....14**  
*Crane Scale*

**MSI-4260C Port-A-Weigh .....16**  
*Industrial Crane Scale*

**MSI-4260 IS Port-A-Weigh .....18**  
*Intrinsically Safe Crane Scale*

**MSI-4260M Port-A-Weigh .....19**  
*Industrial Crane Scale*

**MSI-4260M Port-A-Weigh .....21**  
*Marine Crane Scale*

**MSI-9600HT Hi-Torque  
Port-A-Weigh Plus .....22**  
*High Torque Crane Scale*

**MSI-6360 Trans-Weigh .....23**  
*Crane Scale*

**Crane Scale Cart.....25**  
*Universal Transport and Storage Cart*

**MSI-7300 Dyna-Link 2 .....26**  
*Digital Tension Dynamometer*

**MSI Dyna-Clamp .....28**  
*Tension Meter*

**MSI Clamp-On.....29**  
*Load Cell*

**MSI Load Pin Sensors.....30**

**MSI Shear Web .....31**  
*Load Cell*

**MSI Tension Link.....32**  
*Load Cell*

**Shackle Dimensions .....33**

The following product names, logos, brands and other trademarks featured or referred to within this publication are the property of their respective trademark holders.

# MSI-3460 Challenger 3

Crane Scale

CRANE SCALES



## Approvals



Consult

Consult

## Standard Features

- LED display
- Top lifting eye and bottom swivel hook
- Lb/kg switch selectable
- Six volt rechargeable battery and universal 115/230 VAC, 50/60 Hz battery charger (NA plug standard)
- Meets or exceeds OSHA, ANSI, ASME and other safety design standards (5:1 Ultimate Safety Factor)
- NTEP Certified (250 to 10,000 lb capacities)

## Part Number/Price

Part #	Description	Resolution	Est. Weight	Price
139102	250 lb/500 lb (125 kg/250 kg) cap F/A	0.1 lb (0.05 kg) 0.2 lb (0.1 kg)	22 lb	\$2,090.00
139103	1,000 lb/2,000 lb (500 kg/1,000 kg) cap F/A	0.5 lb (0.2 kg) 1 lb (0.5 kg)	22 lb	\$2,200.00
139104	5,000 lb/10,000 lb (2,500 kg/5,000 kg) cap F/A	2 lb (1 kg) 5 lb (2 kg)	39 lb	\$2,760.00
139105	15,000 lb (7,000 kg) cap F/A	5 lb (2 kg)	67 lb	\$3,770.00
139110	250 lb/500 lb (125 kg/250 kg) cap F/A (with RF modem for connectivity to model MSI-8000 and remote)	0.1 lb (0.05 kg) 0.2 lb (0.1 kg)	22 lb	\$2,280.00
139111	1,000 lb/2,000 lb (500 kg/1,000 kg) cap F/A (with RF modem for connectivity to model MSI-8000 and remote)	0.5 lb (0.2 kg) 1 lb (0.5 kg)	22 lb	\$2,430.00
139112	5,000 lb/10,000 lb (2,500 kg/5,000 kg) cap F/A (with RF modem for connectivity to model MSI-8000 and remote)	2 lb (1 kg) 5 lb (2 kg)	39 lb	\$2,920.00
139113	15,000 lb (7,000 kg) cap F/A (with RF modem for connectivity to model MSI-8000 and remote)	5 lb (2 kg)	67 lb	\$4,010.00
176909	250 lb/500 lb (125 kg/250 kg) cap F/A with Wi-Fi	0.1 lb (0.05 kg) 0.2 lb (0.1 kg)	22 lb	\$2,340.00
176910	1,000 lb/2,000 lb (500 kg/1,000 kg) cap F/A with Wi-Fi	0.5 lb (0.2 kg) 1 lb (0.5 kg)	22 lb	\$2,460.00
176911	5,000 lb/10,000 lb (2,500 kg/5,000 kg) cap F/A with Wi-Fi	2 lb (1 kg) 5 lb (2 kg)	39 lb	\$2,990.00
176912	15,000 lb (7,000 kg) cap F/A with Wi-Fi	5 lb (2 kg)	67 lb	\$4,080.00

## Options

(Contact MSI for application consultation)

- Rugged remote control (control for On/Off, Zero, Tare and other functions)
- RF modem install for connectivity to MSI-8000, MSI-8000HD RF, MSI-8004HD RF remote display, TranSend and LaserLight2 remote display range typically 100 to 300 ft, line of sight; for longer range consult factory
- Universal direct power supply (115/230 VAC)
- Audible alarm
- Wi-Fi communication is available for specialty applications
- OIML and CE approved versions available, consult for more information

## Specifications

### Accuracy:

± (0.1% +1 d) of applied load

### Resolution:

2,000 to 3,750 d standard  
(Up to 10,000 d available)

### Enclosure:

NEMA Type 4, IP65, powder coated cast aluminum

### Lifting Eye & Hook:

Crosby® or equivalent with 360° non-bearing swivel hook

### Design Overload:

200% Safe / 500% Ultimate

### Functions:

Power: Turns unit ON or OFF  
Zero: Zeros applied load up to 100% of capacity (limited range in NTEP/OIML configurations)  
Tare: Tares applied load and displays weight in Net mode  
User: Programmable as test, units, net/gross, total, peak hold and setpoints

### Display:

5-digit, 1.5 in (38 mm) LED with programmable brightness control

### Displayable Units:

Pounds or kilogram selectable

### Annunciators:

COZ, Net, Gross, Total, Peak, Low Battery, lb/kg, Motion, Setpoints, ACK IN, ACK OUT, RF

### Power:

6 Volt rechargeable battery. 115/230 VAC battery charger is included

### Operating Time:

Up to 80 hours between charging with typical use, less with optional RF Model

### Temperature Range:

Operating: 14 °F to 104 °F (-10 °C to 40 °C)  
Certified: 14 °F to 104 °F (-10 °C to 40 °C)

### Auto-Off Mode:

Select for 15, 30, 45, 60 minutes or Off

### Auto Sleep Mode:

Power down during non-use and power up with weight change or any key press

### Service Counters:

Counts number of lifts over percentage of capacity and lifts over capacity

### Calibration:

Digital

### Filtering:

OFF, LO, HI-1, HI-2 selectable

### Warranty:

One-year limited

### Approvals:

NTEP CC 86-021: 250 to 10,000 lb  
OIML (Consult)  
CE Marked (Consult)

# MSI-3460 Challenger 3

Crane Scale

## Options/Accessories

Part #	Description	Est. Weight	Price
140049	Battery assembly, 6 volt rechargeable	3 lb	\$145.00
139152	Universal 115/230 VAC, 50/60 Hz battery charger (NA plug standard)	5 lb	\$190.00
139153	Battery charger 115/230 VAC, 50/60 Hz (EC plug standard)	5 lb	\$190.00
197201	Battery charger, 115 VAC, 50/60 Hz (NA plug standard) CEC compliant	-	\$235.00
149549	Universal 115/230 VAC 50/60 Hz (NA plug standard) battery charger for MSI-8000 remote display	3 lb	\$155.00
178004	LaserLight2, 4 in (101 mm) six-digit RF scoreboard (requires MSI-3460 with RF modem)	21 lb	\$2,370.00
178006	LaserLight2, 6 in (152 mm) six-digit RF scoreboard (requires MSI-3460 with RF modem)	37 lb	\$2,810.00
Consult	AC power supply	-	\$310.00
140058	3460 AC conversion kit	-	\$445.00
Consult	Audible setpoint alarm	-	\$330.00
139395	Challenger retrofit to 3460 electronics	1 lb	\$1,110.00
139397	Challenger retrofit to 3460 RF electronics	-	\$1,280.00
173014	Rugged remote control (requires MSI-3460 with RF modem)	-	\$330.00
139381	MSI-8000 RF remote display (requires MSI-3460 with RF modem)	5 lb	\$1,320.00
153591	MSI-8000HD ScaleCore RF remote display (requires MSI-3460 with RF modem)	-	\$1,440.00
178281	MSI-8004HD AC, red/green 85~264 VAC, 47~440 Hz, 120~370 VDC	-	\$1,980.00

CRANE SCALES

# MSI-4260 Port-A-Weigh

Industrial Crane Scale



## Approvals



## Standard Features

- LED display
- Top lifting eye or shackle, bottom thrust bearing swivel hook
- 12 volt rechargeable battery and universal 115/230 VAC, 50/60 Hz battery charger (NA plug standard)
- NTEP Certified configuration

## Options

(Contact MSI for application consultation)

- Rugged remote control (control for On/Off, Zero, Tare and other functions)
- RF modem install for connectivity to MSI-8000, MSI-8000HD RF, MSI-8004HD RF remote display, TranSend and LaserLight2 remote display. Typically 100 to 300 ft, line of sight; for longer range consult factory
- Anti-heat shielding for high temperature applications
- Substitute bottom swivel hook with shackle
- Oversized top lifting eye or shackle
- Oversized bottom hook
- Universal direct power supply; 85 to 265 VAC, 47 to 440 Hz / 130 to 300 VDC
- Low headroom top adapter
- Audible alarm
- Wi-Fi communication is available for specialty applications
- Custom top and bottom interfaces
- Factory Mutual and ATEX approved intrinsically safe models available

## Part Number/Price

Part #	Description	Resolution	Est. Weight	Price
139460	500 lb (250 kg) F/A	0.2 lb (0.1 kg)	53 lb	\$4,520.00
139461	2,000 lb (1,000 kg) F/A	1.0 lb (0.5 kg)	53 lb	\$4,520.00
139462	5,000 lb (2,500 kg) F/A	1.0 lb (0.5 kg)	62 lb	\$4,620.00
139463	10,000 lb (5,000 kg) F/A	2.0 lb (1.0 kg)	62 lb	\$4,890.00
139464	20,000 lb (10,000 kg) F/A	5.0 lb (2.0 kg)	105 lb	\$6,540.00
139465	30,000 lb (15,000 kg) F/A	10 lb (5.0 kg)	125 lb	\$6,910.00
139466*	50,000 lb (25,000 kg) F/A	10 lb (5.0 kg)	235 lb	\$10,560.00
139467**	70,000 lb (35,000 kg) F/A	20 lb (10 kg)	270 lb	\$13,990.00
139468***	100,000 lb (50,000 kg) F/A	20 lb (10 kg)	420 lb	\$21,700.00

\* 490% of kg capacity

\*\* 475% of lb capacity/430% of kg capacity

\*\*\* 450% of kg capacity

## Specifications

### Accuracy:

± 0.1% +1 d of applied load

### Resolution:

3,000 to 5,000 d standard  
(Up to 10,000 d available)

### Enclosure:

NEMA Type 4, IP66 marine grade 356 alloy  
anodized cast aluminum

### Lifting Eye, Shackle & Hook:

Crosby® or equal with 360° thrust-bearing  
swivel hook

### Design Overload:

200% Safe / 500% Ultimate (except where noted)

### Functions:

Power: Turns Unit ON or OFF, Zero: Zeros applied  
load up to 100% of capacity (limited range in  
NTEP configuration)  
Tare: Tares applied load and displays weight in  
Net mode, F1: Programmable as TEST, UNITS, NET/  
GROSS, TOTAL & PEAK HOLD

### Display:

Five digit, 1.2 in (30 mm) LED with programmable  
brightness control

### Displayable Units:

Pounds or kilograms selectable

### Annunciators:

COZ, Net, Gross, Total, Peak, Low Battery, lb/kg,  
Motion, Setpoints

### Power:

12 Volt rechargeable battery (115/230 VAC battery  
charger is included)

### Operating Time:

Up to 200 hours between charging with typical use,  
less with optional RF modem

### Temperature Range:

Operating: -40 °F to 122 °F (-40 °C to 50 °C)  
Certified: 14 °F to 104 °F (-10 °C to 40 °C)

### Auto-Off Mode:

Select for 15, 30, 45 minutes, 1 hour or Off

### Auto Sleep Mode:

Power down during non-use and power up with  
weight change or any key press

### Service Counters:

Counts number of lifts over percentage of capacity  
and lifts over capacity

### Calibration:

Digital

### Filtering:

OFF, LO, HI-1, HI-2 selectable

### Warranty:

One-year limited

### Approvals:

NTEP CC 19-122: 500 to 70,000 lb  
Measurement Canada AM-6198: 500 to 5,000 lb

# MSI-4260 Port-A-Weigh

Industrial Crane Scale

## Options/Accessories

Part #	Description	Est. Weight	Price
<b>150971</b>	MSI RF modem option kit (used in MSI-4260, MSI-4260M, MSI-6360, MSI-9600HT)	-	\$240.00
<b>139381</b>	MSI-8000 RF remote display (requires MSI-4260 equipped with RF modem)	5 lb	\$1,320.00
<b>173014</b>	RF rugged remote control (requires MSI-4260 equipped with RF modem)	-	\$330.00
<b>153591</b>	MSI-8000HD remote display, AC power and tilt bracket option	3 lb	\$1,440.00
<b>178281</b>	MSI-8004HD AC, red/green 85~264 VAC, 47~440 Hz, 120~370 VDC	-	\$1,980.00
<b>159221</b>	Universal crane scale transport cart	180 lb	\$1,250.00
<b>178004</b>	LaserLight2, 4 in (101 mm) six-digit RF scoreboard (requires MSI-4260 equipped with RF modem)	21 lb	\$2,370.00
<b>178006</b>	LaserLight2, 6 in (152 mm) six-digit RF scoreboard (requires MSI-4260 equipped with RF modem)	37 lb	\$2,810.00
<b>Consult</b>	AC direct power supply	-	\$535.00
<b>Consult</b>	Audible setpoint alarm	-	\$395.00
<b>Consult</b>	Anti-heat shield	-	\$1,010.00
<b>152123</b>	Retrofit kit 4260 to 4260B	8 lb	\$2,560.00
<b>176956</b>	MSI Wi-Fi modem option kit (used in MSI-4260, MSI-4260M, MSI-6360, MSI-9600HT)	-	\$465.00
<b>Accessories</b>			
<b>150367</b>	Battery assembly, 12 V rechargeable	7 lb	\$135.00
<b>138006</b>	Universal 115/230 VAC, 50/60 Hz battery charger (NA plug standard)	4 lb	\$330.00
<b>138007</b>	Universal 115/230 VAC, 50/60 Hz battery charger (UK plug standard)	4 lb	\$330.00
<b>138008</b>	Universal 115/230 VAC, 50/60 Hz battery charger (EC plug standard)	4 lb	\$330.00
<b>149549</b>	Universal 115/ 230 VAC 50/60 Hz (NA plug standard) battery charger for MSI-8000 remote display	3 lb	\$155.00
<b>4260 Sub Hook with Shackle</b>			
<b>Consult</b>	500 to 10,000 lb, 6.5 ton shackle	-	Consult
<b>Consult</b>	20,000 to 30,000 lb, 17 ton shackle	-	Consult
<b>Consult</b>	50,000 lb, 25 ton shackle	-	Consult
<b>Consult</b>	70,000 lb, 40 ton shackle	-	Consult
<b>Consult</b>	100,000 lb, 55 ton shackle	-	Consult
<b>4260 Oversize Lifting Eye/Shackle</b>			
<b>Consult</b>	500 to 10,000 lb capacity	-	Consult
<b>Consult</b>	20,000 to 30,000 lb capacity, adapter with 25 ton shackle	-	Consult
<b>Consult</b>	50,000 to 70,000 lb capacity	-	Consult
<b>Consult</b>	100,000 lb capacity	-	Consult

CRANE SCALES

# MSI-4260 IS Port-A-Weigh

Intrinsically Safe Crane Scale

CRANE SCALES



## Approvals



## Standard Features

- LED display
- Top lifting eye or shackle, bottom thrust bearing swivel hook
- 12 volt rechargeable battery and universal 115/230 VAC, 50/60 Hz battery charger (NA plug standard)

(Contact MSI for application consultation)

## Part Number/Price

Part #	Description	Resolution	Price
156013	500 lb (250 kg), swivel hook	0.2 lb (0.1 kg)	\$6,620.00
156014	2,000 lb (1,000 kg), swivel hook	1.0 lb (0.5 kg)	\$6,620.00
156015	5,000 lb (2,500 kg), swivel hook	1.0 lb (0.5 kg)	\$6,620.00
156016	10,000 lb (5,000 kg), swivel hook	2.0 lb (1.0 kg)	\$6,620.00
156017	20,000 lb (10,000 kg), swivel hook	5.0 lb (2.0 kg)	\$8,380.00
156018	30,000 lb (15,000 kg), swivel hook	10 lb (5.0 kg)	\$8,380.00
156019	50,000 lb (25,000 kg), swivel hook	10 lb (5.0 kg)	\$12,360.00
156020	70,000 lb (35,000 kg), swivel hook	20 lb (10 kg)	\$14,610.00
156021	100,000 lb (50,000 kg), swivel hook	20 lb (10 kg)	\$22,500.00

Capacities over 70,000lb are not NTEP

## Options/Accessories

Part #	Description	Price
170606	Battery charger	\$305.00
167777	Spare battery	\$275.00

## Specifications

### Accuracy:

± (0.1% +1 d) of applied load

### Resolution:

3,000 to 5,000 d standard  
(up to 10,000 d available)

### Enclosure:

NEMA Type 4, IP66 marine grade 356 alloy  
anodized cast aluminum

### Intrinsic Safety:

US Listings

FM16US0156X

IS / I, II, III / 1 / CDEFG / T4 Ta = -20°C to 50°C

I / 0 / AEx ia / IIB / T4 Ta = -20°C to 50°C Ga

20 / AEx ia / IIC / T135°C Ta = -20 °C to 50 °C Da

Canadian Listings

FM16CA0092X

IS / I / 1 / CD / T4 Ta = -10 °C to 50 °C

IS / II, III / 1 / EFG / T4 Ta = -10 °C to 50 °C

I / 0 / Ex ia / IIB / T4 Ta = -10 °C to 50 °C Ga

20 / Ex ia / IIC / T135°C Ta = -10 °C to 50 °C Da

ATEX Listings

FM16ATEX0038X

II 1 G Ex ia IIB T4 Ga -10 °C = Ta = 50 °C

II 1 D Ex ia IIC T135°C Da -10 °C = Ta = 50 °C

### Lifting Eye, Shackle & Hook:

Crosby® or equal with 360° thrust-bearing  
swivel hook

### Design Overload:

200% Safe / 500% Ultimate (except where noted)

### Functions:

Power: Turns unit on or off

Zero: Zeros applied load up to 100% of capacity  
(limited range in NTEP Certified configuration)

Tare: Tares applied load and displays  
weight in net

Mode F1: Programmable as test, units, net/gross,  
total and peak hold

### Display:

Five-digit, 1.2 in (30 mm) LED with  
programmable brightness control

### Displayable Units:

Pounds or kilograms selectable

### Annunciators:

COZ, Net, Gross, Total, Peak, Low Battery, lb/kg,  
Motion, Setpoints

### Power:

12 volt rechargeable battery

115/230 VAC approved battery charger is included

### Temperature Range:

Certified: -10 °C to 40 °C

### Operating Time:

Up to 200 hours between charging with typical use

### Auto-Off Mode:

Select for 15, 30, 45 minutes, 1 hour or Off

### Auto Sleep Mode:

Power down during non-use and power up with  
weight change or any key press

### Service Counters:

Counts number of lifts over percentage of capacity  
and lifts over capacity

### Calibration:

Digital

### Filtering:

OFF, LO, HI-1, HI-2 selectable

### Warranty:

One-year limited

### Approvals:

NTEP CC 19-122: 500 to 70,000 lb

Measurement Canada AM-6198: 500 to 5,000 lb  
cFmus Approved



# MSI-4260M Port-A-Weigh

Industrial Crane Scale



## Approvals



## Part Number/Price

Part #	Description	Resolution	Est. Weight	Price
<b>4260M with LCD display, Swivel Hook, No RF, 12V SLA Battery</b>				
201951	500 lb (250 kg) with 12V battery F/A	0.2 lb (0.1 kg)	53 lb	\$4,920.00
201953	2,000 lb (1,000 kg) with 12V battery F/A	1.0 lb (0.5 kg)	53 lb	\$4,920.00
201954	5,000 lb (2,500 kg) with 12V battery F/A	1.0 lb (0.5 kg)	62 lb	\$5,240.00
201955	10,000 lb (5,000 kg) with 12V battery F/A	2.0 lb (1.0 kg)	62 lb	\$5,460.00
201956	20,000 lb (10,000 kg) with 12V battery F/A	5.0 lb (2.0 kg)	105 lb	\$7,120.00
201957	30,000 lb (15,000 kg) with 12V battery F/A	10 lb (5.0 kg)	125 lb	\$7,480.00
201958	50,000 lb (25,000 kg) with 12V battery F/A	10 lb (5.0 kg)	235 lb	\$11,450.00
201959	70,000 lb (35,000 kg) with 12V battery F/A	20 lb (10 kg)	270 lb	\$14,990.00
201960	100,000 lb (50,000 kg) with 12V battery F/A	20 lb (10 kg)	420 lb	\$22,800.00
<b>4260M with LCD display, Swivel Hook, No RF, D-Cell Battery</b>				
201999	500 lb (250 kg) with D-cell battery F/A	0.2 lb (0.1 kg)	53 lb	\$4,920.00
202000	2,000 lb (1,000 kg) with D-cell battery F/A	1.0 lb (0.5 kg)	53 lb	\$4,920.00
202001	5,000 lb (2,500 kg) with D-cell battery F/A	1.0 lb (0.5 kg)	62 lb	\$5,240.00
202002	10,000 lb (5,000 kg) with D-cell battery F/A	2.0 lb (1.0 kg)	62 lb	\$5,460.00
202003	20,000 lb (10,000 kg) with D-cell battery F/A	5.0 lb (2.0 kg)	105 lb	\$7,120.00
202004	30,000 lb (15,000 kg) with D-cell battery F/A	10 lb (5.0 kg)	125 lb	\$7,480.00
202005	50,000 lb (25,000 kg) with D-cell battery F/A	10 lb (5.0 kg)	235 lb	\$11,450.00
202006	70,000 lb (35,000 kg) with D-cell battery F/A	20 lb (10 kg)	270 lb	\$14,990.00
202007	100,000 lb (50,000 kg) with D-cell battery F/A	20 lb (10 kg)	420 lb	\$22,800.00

Capacities over 70,000lb are not NTEP and capacities over 5,000lb are not currently Measurement Canada

## Standard Features

- LCD display
- IP66 cast aluminum
- Top lifting eye or shackle, bottom thrust bearing swivel hook
- Battery operated, six (6) D cell 1.5V alkaline batteries or 12 volt rechargeable battery (115/230 VAC battery charger is included)
- NTEP Certified configuration

## Options

(Contact MSI for application consultation)

- Rugged remote control (control for On/Off, Zero, Tare and other functions)
- RF modem install for connectivity to MSI-8000, MSI-8000HD RF, MSI-8004HD RF remote display, TranSend and LaserLight2 remote display
- Wi-Fi communication is available for specialty applications
- Anti-heat shielding for high temperature applications
- Substitute bottom swivel hook with shackle
- Oversized top lifting eye or shackle
- Oversized bottom hook
- Universal direct power supply; 85 to 265 VAC, 47 to 440 Hz / 130 to 300 VDC
- Low headroom top adapter
- Audible alarm
- Custom top and bottom interfaces

## Specifications

### Accuracy:

± 0.1% +1 d of applied load

### Resolution:

Max NTEP Approved Class III: 2,500 d  
Max NTEP Approved Class IIIL: 5,000 d  
Max Non-NTEP Approved: 10,000 d

### Enclosure:

IP66 cast aluminum

### Lifting Eye, Shackle & Hook:

Crosby® or equal with 360° thrust-bearing swivel hook

### Design Overload:

200% Safe / 500% Ultimate (except where noted)

### Functions:

Power: Turns Unit ON or OFF  
Zero: Zeros applied load up to 100% of capacity (limited range in NTEP configuration)  
Tare: Tares applied load and displays weight in Net mode  
User: Programmable as test, total, unit, peak hold, net/gross, view total and print

### Display:

Five-digit, 1.75 in (44.5 mm) LCD with programmable brightness control

### Displayable Units:

Pounds or kilograms selectable

### Annunciators:

COZ, Battery Level, Net, Total, lb/kg, Stability, RF and Setpoint LEDs

### Power:

Battery operated, six (6) D cell 1.5V alkaline batteries or 12 volt rechargeable battery (115/230 VAC battery charger is included)

### Operating Time:

Six (6) D Cell 1.5V alkaline batteries:  
Up to 1,000 hours of battery life with typical use, less with RF modem  
12 volt rechargeable battery: Up to 250 hours between charging with typical use, less with RF modem

### Temperature Range:

Operating: -20 °F to 122 °F (-28 °C to 50 °C)  
Certified: 14 °F to 104 °F (-10 °C to 40 °C)

### Auto-Off Mode:

Powers off after the scale is not used for the set time (in minutes); 15, 30, 45, 60 or OFF selectable

### Auto Sleep Mode:

Power down during non-use after the set time (in minutes) and powers up with weight change or any key press; 5, 15, 30 or OFF selectable

### Service Counters:

Counts number of lifts over percentage of capacity and lifts over capacity

### Calibration:

Digital (procedure initiated by calibration switch)

### Filtering:

OFF, LO, HI-1 or HI-2 selectable

### Radio Link:

802.15.4 at 2.4 GHz

### Radio Effective Range:

Typically 100 to 300 ft line of sight

### Warranty:

One-year limited

### Approvals:

NTEP CC 19-122: 500 to 70,000 lb  
Measurement Canada AM-6198: 500 to 5,000 lb

# MSI-4260M Port-A-Weigh

Industrial Crane Scale

## Options/Accessories

Part #	Description	Est. Weight	Price
150971	MSI RF modem option kit (used in MSI-4260, MSI-4260M, MSI-6360, MSI-9600HT)	-	\$240.00
139381	MSI-8000 RF remote display (requires MSI-4260M equipped with RF modem)	5 lb	\$1,320.00
173014	RF rugged remote control (requires MSI-4260M equipped with RF modem)	-	\$330.00
153591	MSI-8000HD remote display, AC power and tilt bracket option (requires MSI-4260M equipped with RF modem)	3 lb	\$1,440.00
178281	MSI-8004HD AC, red/green 85~264 VAC, 47~440 Hz, 120~370 VDC	-	\$1,980.00
159221	Universal crane scale transport cart	180 lb	\$1,250.00
178004	LaserLight2, 4 in (101 mm) six-digit RF scoreboard (requires MSI-4260M equipped with RF modem)	21 lb	\$2,370.00
178006	LaserLight2, 6 in (152 mm) six-digit RF scoreboard (requires MSI-4260M equipped with RF modem)	37 lb	\$2,810.00
176956	MSI Wi-Fi modem option kit (used in MSI-4260, MSI-4260M, MSI-6360, MSI-9600HT)	-	\$465.00
<b>Accessories</b>			
150367	Battery assembly, 12V rechargeable	7 lb	\$135.00
138006	Universal 115/230 VAC, 50/60 Hz battery charger (NA plug standard)	4 lb	\$330.00
138007	Universal 115/230 VAC, 50/60 Hz battery charger (UK plug standard)	4 lb	\$330.00
138008	Universal 115/230 VAC, 50/60 Hz battery charger (EC plug standard)	4 lb	\$330.00
149549	Universal 115/ 230 VAC 50/60 Hz (NA plug standard) battery charger for MSI-8000 remote display	3 lb	\$155.00
<b>4260 Sub Hook with Shackle</b>			
Consult	500 to 10,000 lb, 6.5 ton shackle	-	Consult
Consult	20,000 to 30,000 lb, 17 ton shackle	-	Consult
Consult	50,000 lb, 25 ton shackle	-	Consult
Consult	70,000 lb, 40 ton shackle	-	Consult
Consult	100,000 lb, 55 ton shackle	-	Consult
<b>4260 Oversize Lifting Eye/Shackle</b>			
Consult	500 to 10,000 lb capacity	-	Consult
Consult	20,000 to 30,000 lb capacity, adapter with 25 ton shackle	-	Consult
Consult	50,000 to 70,000 lb capacity	-	Consult
Consult	100,000 lb capacity	-	Consult

CRANE SCALES



# MSI-4260M Port-A-Weigh

Marine Crane Scale



## Standard Features

- LCD display
- IP66 cast aluminum
- Top lifting eye with lower link interface
- Battery operated, six (6) D cell 1.5V alkaline batteries
- NTEP Certified configuration

## Options

(Contact MSI for application consultation)

- Rugged remote control (control for On/Off, Zero, Tare and other functions)
- RF modem install for connectivity to MSI-8000, MSI-8000HD, MSI-8004HD, TranSend and LaserLight2 remote display. Typically 100 to 300 ft, line of sight; for longer range consult factory.
- Wi-Fi communication is available for specialty applications

## Specifications

### Accuracy:

± (0.1% +1d) of applied load

### Resolution:

Max NTEP Approved Class III: 2,500 Divisions  
Max NTEP Approved Class IIII: 5,000 Divisions  
Max Non NTEP Approved: 10,000 Divisions

### Enclosure:

IP66 cast aluminum

### Lifting Eye, Link & Hook:

Top lifting eye with lower link interface

### Design Overload:

200% Safe / 500% Ultimate

### Functions:

Power: Turns Unit ON or OFF  
Zero: Zeros applied load up to 100% of capacity (limited range in NTEP configuration),  
Tare: Tares applied load and displays weight in Net mode  
User: Programmable as test, total, unit, peak hold, net/gross, view total and print

### Display:

Five-digit, 1.75 in (44.5 mm) LCD with programmable brightness control

### Displayable Units:

Pounds or kilograms selectable

### Annunciators:

COZ, Battery Level, Net, Total, lb/kg, Stability, RF and Setpoint LEDs

### Power:

Battery operated, six (6) D cell 1.5 V alkaline batteries

### Operating Time:

Up to 1,000 hours of battery life with typical use, less with RF modem option

### Temperature Range:

Operating: -20° F to 122° F (-28 °C to 50 °C)  
Certified: 14 °F to 104 °F (-10 °C to 40 °C)

### Auto-Off Mode:

Powers off after the scale is not used for the set time (in minutes); 15, 30, 45, 60 or OFF selectable

### Auto Sleep Mode:

Power down during non-use after the set time (in minutes) and powers up with weight change or any key press; 5, 15, 30 or OFF selectable

### Service Counters:

Counts number of lifts over percentage of capacity and lifts over capacity

### Calibration:

Digital (procedure initiated by calibration switch)

### Filtering:

OFF, LO, HI-1 or HI-2 selectable

### Radio Link:

802.15.4 at 2.4 GHz

### Radio Effective Range:

Typically 100 to 300 ft line of sight

### Warranty:

One-year limited

### Approvals:

NTEP CC 19-122: 500 to 70,000 lb  
Measurement Canada AM-6198: 500 to 5,000 lb

## Approvals



## Part Number/Price

Part #	Description	Resolution	Est. Weight	Price
194593	5,000 lb	1.0 lb (0.5 kg)	58 lb	\$4,960.00
196908	5,000 lb w/RF	1.0 lb (0.5 kg)	58 lb	\$5,270.00

## Options/Accessories

Part #	Description	Est. Weight	Price
150971	MSI RF modem option kit (used in MSI-4260, MSI-4260M, MSI-6360, MSI-9600HT)	-	\$240.00
139381	MSI-8000 RF remote display (requires MSI-4260M equipped with RF modem)	5 lb	\$1,320.00
173014	RF rugged remote control (requires MSI-4260M equipped with RF modem)	-	\$330.00
153591	MSI-8000HD remote display, AC power and tilt bracket option (requires MSI-4260M equipped with RF modem)	3 lb	\$1,440.00
178281	MSI-8004HD AC, red/green 85~264 VAC, 47~440 Hz, 120~370 VDC	-	\$1,980.00
159221	Universal crane scale transport cart	180 lb	\$1,250.00
178004	LaserLight2, 4 in (101 mm) six-digit RF scoreboard (requires MSI-4260M equipped with RF modem)	21 lb	\$2,370.00
178006	LaserLight2, 6 in (152 mm) six-digit RF scoreboard (requires MSI-4260M equipped with RF modem)	37 lb	\$2,810.00
176956	MSI Wi-Fi modem option kit (used in MSI-4260, MSI-4260M, MSI-6360, MSI-9600HT)	-	\$465.00

CRANE SCALES

# MSI-9600HT Hi-Torque Port-A-Weigh Plus

High Torque Crane Scale



CRANE SCALES

## Standard Features

- LED display and annunciators
- Top shackle (sold separately)
- 12 volt rechargeable battery and universal 115/230 VAC, 50/60 Hz battery charger (NA plug standard)
- Hi-torque load train designed for use with powered rotation

## Part Number/Price

Part #	Description	Resolution	Est. Weight	Price
214371	10,000 lb (5000 kg) F/A	2.0 lb (1.0 kg)	62 lb	Consult
214370	30,000 lb (15,000 kg) F/A	10 lb (5.0 kg)	125 lb	Consult
214369	70,000 lb (35,000 kg) F/A	20 lb (10 kg)	270 lb	Consult
214477	100,000 lb (50,000 kg) F/A	20 lb (10 kg)	420 lb	Consult
214474	120,000 lb (60,000 kg) F/A	50 lb (20 kg)	550 lb	Consult
214479*	200,000 lb (100,000 kg) F/A	100 lb (50 kg)	1,100 lb	Consult

\* 400% Ultimate overload

## Options/Accessories

Part #	Description	Est. Weight	Price
141992	Top lifting shackle Crosby® G2130 17 ton for 30,000 lb cap unit	-	Consult
146335	Top lifting shackle Crosby® G2140 40 ton for 70,000 lb cap unit	-	Consult
146336	Top lifting shackle Crosby® G2140 55 ton for 120,000 lb cap unit	-	Consult
150971	MSI RF modem option kit (used in MSI-4260, MSI-4260M, MSI-6360, MSI-9600HT)	3 lb	\$240.00
173014	RF rugged remote control (requires MSI-9600HT equipped with RF modem)	-	\$330.00
153591	MSI-8000HD RF remote display AC powered ( no A/D)	180 lb	\$1,440.00
178004	4in LaserLight2 MSI RF	21 lb	\$2,370.00
159221	Universal crane scale transport cart	-	\$1,250.00
Consult	AC direct power supply	-	\$535.00
Consult	Anti-heat shield	-	\$1,010.00
Consult	Audible alarm	-	\$400.00
176956	MSI Wi-Fi modem option kit (used in MSI-4260, MSI-4260M, MSI-6360, MSI-9600HT)	-	\$465.00
<b>Accessories</b>			
150367	Battery assembly, 12 V rechargeable	7 lb	\$135.00
138006	Universal 115/230 VAC, 50/60 Hz battery charger (NA plug standard)	4 lb	\$330.00
138007	Universal 115/230 VAC, 50/60 Hz battery charger (UK plug standard)	4 lb	\$330.00
138008	Universal 115/230 VAC, 50/60 Hz battery charger (EC plug standard)	4 lb	\$330.00

## Options

(Contact MSI for application consultation)

- Top shackle
- Rugged remote control (control for On/Off, Zero, Tare and other functions)
- Anti-heat shielding for high-temperature applications
- Substitute bottom hook with shackle
- Oversized top or shackle
- Oversized bottom hooks
- Universal direct power supply
- Wi-Fi communication is available for specialty applications
- RF modem install for connectivity to MSI-8000, MSI-8000HD RF, MSI-8004HD RF remote display, TranSend and LaserLight2 remote display
- Typically 100 to 300 ft, line of sight; for longer range consult factory
- Low headroom top adaptor
- Audible alarm
- Custom top and bottom interfaces

## Specifications

### Accuracy:

10,000 to 120,000 lb:  $\pm (0.1\% + 1 \text{ d})$  of capacity  
200,000 lb:  $\pm (0.2\% + 1 \text{ d})$  of capacity

### Resolution:

3,000 to 5,000 d standard  
(Up to 10,000 d available)

### Enclosure:

NEMA Type 4, IP66, marine grade 356 alloy anodized cast aluminum

### Lifting Eye, Shackle & Hook:

Shackle is optional and Crosby® fixed hook provided as standard

### Design Overload:

200% Safe / 500% Ultimate (except where noted)

### Functions:

Power: Turns unit on or off  
Zero: Zeros applied load up to 100% of capacity  
Tare: Tares applied load and displays weight in net  
Mode F1: Programmable as test, units, net/gross, total and peak hold

### Display:

6 digit, 1.5 in (38 mm) LED with programmable brightness control

### Displayable Units:

Pounds or kilograms selectable

### Power:

12 Volt rechargeable battery, 115/230 VAC battery charger included

### Operating Time:

Up to 30 hours between charging with typical use

### Operating Temperature:

14 °F to 104 °F (-10 °C to 40 °C)

### Calibration:

Digital

### Filtering:

OFF, LO, HI-1 or HI-2 selectable

### Radio Link:

802.15.4 at 2.4 GHz

### Radio Link Effective Range:

Typically 100 to 300 ft line of sight

### Warranty:

One-year limited

# MSI-6360 Trans-Weigh

Crane Scale



## Approvals



## Standard Features

- Top lifting eye or shackle, bottom thrust bearing swivel hook
- 12 volt rechargeable battery and universal 115/230 VAC, 50/60 Hz battery charger (NA Plug Standard)
- Meets or exceeds OSHA, ANSI, ASME and other safety design standards (5:1 Ultimate Safety Factor)
- NTEP Certified configuration

## Part Number/Price

Part #	Description	Resolution	Est. Weight	Price
215829	500 lb (250 kg) F/A	0.2 lb (0.1 kg)	53 lb	Consult
215830	2,000 lb (1000 kg) F/A	1.0 lb (0.5 kg)	53 lb	Consult
215831	5,000 lb (2500 kg) F/A	1.0 lb (0.5 kg)	62 lb	Consult
215832	10,000 lb (5000 kg) F/A	2.0 lb (1.0 kg)	62 lb	Consult
215833	20,000 lb (10,000 kg) F/A	5.0 lb (2.0 kg)	105 lb	Consult
215834	30,000 lb (15,000 kg) F/A	10 lb (5.0 kg)	125 lb	Consult
215835	50,000 lb (25,000 kg) F/A	10 lb (5.0 kg)	235 lb	Consult
215836	70,000 lb (35,000 kg) F/A	20 lb (10 kg)	270 lb	Consult
215837	100,000 lb (50,000 kg) F/A	20 lb (10 kg)	420 lb	Consult

## Options

(Contact MSI for application consultation)

- Anti-heat shielding for high-temperature applications
- Substitute bottom swivel hook with shackle
- Rugged remote control (control for On/Off, Zero, Tare and other functions)
- Oversized top lifting eye or shackle
- Oversized bottom hook
- Low headroom top adaptor
- Universal direct power supply; 85 to 265 VAC, 47 to 440 Hz / 130 to 300 VDC
- Wi-Fi communication is available for specialty applications and for use with the ScaleCore Webserver
- RF modem install for connectivity to MSI-8000, MSI-8000HD, MSI-8004HD, TranSend and LaserLight2 remote displays
- Custom top and bottom interfaces
- Crane scale cart

## Specifications

### Accuracy:

± (0.1% +1 d) of applied load

### Resolution:

3,000 to 5,000 d standard  
(Up to 10,000 d available)

### Enclosure:

NEMA Type 4, IP66, marine grade 356 alloy cast aluminum

### Lifting Eye, Shackle & Hook:

Crosby® or equivalent with 360° thrust-bearing swivel hook

### Design Overload:

200% Safe / 500% Ultimate (except where noted)

### Functions:

On/Off

### Displayable Units:

Pounds or kilograms selectable

### Power:

12 Volt rechargeable battery, 115/230 VAC battery charger included

### Operating Time:

Up to 40 hours between charging with typical use

### Operating Temperature:

-4 °F to 140 °F (-20 °C to 60 °C)  
Legal for Trade: 14 °F to 104 °F (-10 °C to 40 °C)

### Calibration:

Digital via MSI ScaleCore remote display

### Radio Link:

802.15.4 at 2.4 GHz

### Radio Link Effective Range:

Typically 100 to 300 ft line of sight

### Warranty:

One-year limited

### Approvals:

NTEP CC 19-122: 500 to 70,000 lb

# MSI-6360 Trans-Weigh

Crane Scale

## Options/Accessories

Part #	Description	Est. Weight	Price
150971	MSI RF modem option kit (used in MSI-4260, MSI-4260M, MSI-6360, MSI-9600HT)		\$240.00
139381	MSI-8000 Remote Display		\$1,320.00
173014	RF Rugged remote control (requires MSI-6360 equipped with RF modem)		\$330.00
153591	MSI-8000HD RF remote display AC powered ( no A/D)		\$1,440.00
178281	MSI-8004HD AC, red/green 85~264 VAC, 47~440 Hz, 120~370 VDC	-	\$1,980.00
178004	4in LaserLight2 MSI RF		\$2,370.00
178006	6in LaserLight2 MSI RF		\$2,810.00
159221	Universal crane scale transport cart	180 lb	\$1,250.00
Consult	AC power supply	-	\$535.00
Consult	Anti-heat shield	-	\$1,010.00
Consult	Audible alarm	-	Consult
176956	MSI Wi-Fi modem option kit (used in MSI-4260, MSI-4260M, MSI-6360, MSI-9600HT)	-	\$465.00
<b>6360 Sub Hook with Shackle</b>			
Consult	500 to 10,000 lb, 6.5 ton shackle	-	Consult
Consult	20,000 to 30,000 lb, 17 ton shackle	-	Consult
Consult	50,000 lb, 25 ton shackle	-	Consult
Consult	70,000 lb, 40 ton shackle	-	Consult
Consult	100,000 lb, 55 ton shackle	-	Consult
<b>6360 Oversize Lifting Eye/Shackle</b>			
Consult	500 to 10,000 lb capacity	-	Consult
Consult	20,000 to 30,000 lb capacity, adapter with 25 ton shackle	-	Consult
Consult	50,000 to 70,000 lb capacity	-	Consult
Consult	100,000 lb capacity	-	Consult
<b>Accessories</b>			
150367	Battery assembly, 12 volt rechargeable	6.6 lb	\$135.00
138006	Universal 115/230 VAC, 50/60 Hz battery charger (NA plug standard)	4 lb	\$330.00
138007	Universal 115/230 VAC, 50/60 Hz battery charger (UK plug standard)	4 lb	\$330.00
138008	Universal 115/230 VAC, 50/60 Hz battery charger (EC plug standard)	4 lb	\$330.00

CRANE SCALES

# Crane Scale Cart

Universal Transport and Storage Cart



## Standard Features

- Designed to hold MSI-4260, MSI-4260IS, MSI-4260M, MSI-4300, MSI-9600HT, MSI-6360
- Four swivel castors with brake
- Powder coated mild steel

## Specifications

**Warranty:**  
One-year limited

## Part Number/Price

Part #	Description	Est. Weight	Price
<b>159221</b>	Universal MSI Crane Scale Cart	180 lb	\$1,250.00
<b>Consult</b>	Modified versions of universal MSI Crane Scale Cart	-	Consult

CRANE SCALES

# MSI-7300 Dyna-Link 2

Digital Tension Dynamometer



Shown with optional shackles

CRANE SCALES

## Part Number/Price

Part #	Description	Resolution	Est. Weight	Price
139162	1,000 lb (500 kg) F/A	0.5 lb (0.2 kg)	8 lb	\$1,610.00
139163	2,500 lb (1,250 kg) F/A	1 lb (0.5 kg)	9 lb	\$1,610.00
139164	5,000 lb (2,500 kg) F/A	2 lb (1.0 kg)	9 lb	\$1,610.00
139165	10,000 lb (5,000 kg) F/A	5 lb (2.0 kg)	11 lb	\$1,730.00
139166	25,000 lb (12,500 kg) F/A	10 lb (5 kg)	19 lb	\$2,310.00
139167	50,000 lb (25,000 kg) F/A	20 lb (10 kg)	29 lb	\$3,000.00
139168*	100,000 lb (50,000 kg) F/A	50 lb (20 kg)	65 lb	\$3,910.00
Optional Configurations (for connectivity to MSI-8000 RF Remote Display) F/A				
139441	1,000 lb (500 kg) RF module	0.5 lb (0.2 kg)	8 lb	\$1,810.00
139442	2,500 lb (1,250 kg) RF module	1 lb (0.5 kg)	9 lb	\$1,810.00
139443	5,000 lb (2,500 kg) RF module	2 lb (1 kg)	9 lb	\$1,810.00
139444	10,000 lb (5,000 kg) RF module	5 lb (2 kg)	11 lb	\$1,930.00
139445	25,000 lb (12,500 kg) RF module	10 lb (5 kg)	19 lb	\$2,500.00
139446	50,000 lb (25,000 kg) RF module	20 lb (10 kg)	29 lb	\$3,190.00
139447*	100,000 lb (50,000 kg) RF module	50 lb (20 kg)	65 lb	\$4,110.00
159168*	120,000 lb (60,000 kg) RF module includes MSI-8000	50 lb (20 kg)	57 lb	Consult
159169*	180,000 lb (90,000 kg) RF module includes MSI-8000	100 lb (50 kg)	74 lb	Consult
159170*	260,000 lb (130,000 kg) RF module includes MSI-8000	100 lb (50 kg)	100 lb	Consult
159171*	380,000 lb (190,000 kg) RF module includes MSI-8000	200 lb (100 kg)	169 lb	Consult
159172**	550,000 lb (275,000 kg) RF module includes MSI-8000	200 lb (100 kg)	336 lb	Consult
MSI-7300 Dyna-Link 2 Wi-Fi				
176813	1,000 lb (500 kg) F/A with Wi-Fi	0.5 lb (0.2 kg)	8 lb	\$1,750.00
176814	2,500 lb (1,250 kg) F/A with Wi-Fi	1 lb (0.5 kg)	9 lb	\$1,840.00
176815	5,000 lb (2,500 kg) F/A with Wi-Fi	2 lb (1.0 kg)	9 lb	\$1,840.00
176816	10,000 lb (5,000 kg) F/A with Wi-Fi	5 lb (2.0 kg)	11 lb	\$1,970.00
176817	25,000 lb (12,500 kg) F/A with Wi-Fi	10 lb (5 kg)	19 lb	\$2,550.00
176818	50,000 lb (25,000 kg) F/A with Wi-Fi	20 lb (10 kg)	29 lb	\$3,340.00
176819	100,000 lb (50,000 kg) F/A with Wi-Fi	50 lb (20 kg)	65 lb	\$4,200.00
176827	120,000 lb (60,000 kg) F/A with Wi-Fi	50 lb (20 kg)	57 lb	Consult
176828	180,000 lb (90,000 kg) F/A with Wi-Fi	100 lb (50 kg)	74 lb	Consult
176829	260,000 lb (130,000 kg) F/A with Wi-Fi	100 lb (50 kg)	100 lb	Consult
176830	380,000 lb (190,000 kg) F/A with Wi-Fi	200 lb (100 kg)	169 lb	Consult
176831	550,000 lb (275,000 kg) F/A with Wi-Fi	200 lb (100 kg)	336 lb	Consult

\* 500% Ultimate overload

\*\* 440% Ultimate overload

## Standard Features

- LCD display
- Two C-cell alkaline batteries for capacities up to 10,000 lb (5,000 kg)
- Two D-cell alkaline batteries for capacities 25,000 lb (12,500 kg) and above

## Options

(Contact MSI for application consultation)

- Crosby® top and bottom shackles
- Portable transport case
- Serial output cable
- Rugged remote control (control for On/Off, Zero, Tare and other functions)
- RF modem install for connectivity to MSI-8000, MSI-8000HD RF, MSI-8004HD RF remote display and TranSend. Typically 100 to 300 ft, line of sight, for longer range consult factory.
- Heavy capacity configurations (60 to 275 Ton)
- Audible alarm
- Wi-Fi communication is available for specialty applications

## Specifications

### Accuracy:

- 0.1% FS of rated capacity (up to 50 ton)
- 0.5% FS of rated capacity (50 ton and above)

### Enclosure:

- NEMA Type 4, IP65, anodized corrosion-resistant finish

### Material:

- 2024 aircraft grade aluminum
- Capacities above 100 K have zinc plated enclosures and 4340 load cell bodies

### Design Overload:

- 200% Safe/700% Ultimate\* (except where noted)

### Functions:

- On/Off, Zero, Hi-Speed Peak Hold, Setpoints, Total, Tare, Auto-Off, Motion Filter

### Display:

- 6 digit, 1.00 in (25 mm) LCD

### Displayable Units:

- Pounds, kilograms, kilonewtons, tons, metric tons

### LED Annunciators:

- Function 1, Function 2, Setpoint 1, Setpoint 2

### LCD Annunciators:

- Net, Center of Zero, Stable, Battery Test, Peak Hold, Total

### Power:

- Two each C-cell alkaline batteries for capacities up to 10,000 lb; two each D-cell alkaline batteries for capacities 25,000 to 100,000 lb

### Operating Time:

- From 150 to 300 hours in typical use depending on unit capacity and battery configuration. Approximately 25 to 30 hours with optional RF modem link installed.

### Operating Temperature:

- 4 °F to 140 °F (-20 °C to 60 °C)

### Calibration:

- Digital

### Filtering:

- OFF, LO, HI selectable

### Data Output:

- Serial RS-232

### Warranty:

- Two-year limited

# MSI-7300 Dyna-Link 2

Digital Tension Dynamometer

## Options/Accessories

Part #	Description	Est. Weight	Price
151357	Shackle anchor, bolt type 3.25 ton for 500 lb-5,000 lb unit	3 lb/pair	Consult
151355	Shackle anchor, bolt type 6.5 ton for 10,000 lb unit	6 lb/pair	Consult
141992	Shackle anchor, bolt type 17 ton for 25,000 lb unit	39 lb/pair	Consult
151356	Shackle anchor, bolt type 25 ton for 50,000 lb unit	63 lb/pair	Consult
146336	Shackle anchor, bolt type 55 ton for 100,000 lb unit	103 lb	Consult
151359	Shackle anchor, bolt type 85 ton for 180,000 lb unit	206 lb/pair	Consult
151360	Shackle anchor, bolt type 120 ton for 260,000 lb unit	225 lb/pair	Consult
151361	Shackle anchor, bolt type 175 ton for 380,000 lb unit	665 lb/pair	Consult
151358	Shackle anchor, bolt type 250 ton for 550,000 lb unit	1,300 lb/pair	Consult
139381	MSI-8000 RF remote display (requires MSI-7300 equipped with optional RF modem)	5 lb	\$1,320.00
153591	MSI-8000HD RF remote display, A/C powered with tilt stand (requires MSI-7300 equipped with optional RF modem)	5 lb	\$1,440.00
165313	Heavy duty Pelican transport case with precision cut. Heavy duty foam for units up to 10,000 lb capacity	10 lb	\$365.00
145076	Transport crate for 25,000 lb and 50,000 lb capacity unit	35 lb	\$440.00
145073	Transport crate for 100,000 lb capacity unit	42 lb	Consult
139470	RS-232 serial cable for MSI-7300	1 lb	\$155.00
178004	LaserLight2, 4 in (101 mm) six-digit RF scoreboard (requires MSI-7300 equipped with optional RF modem)	21 lb	\$2,370.00
178006	LaserLight2, 6 in (152 mm) six-digit RF scoreboard (requires MSI-7300 equipped with optional RF modem)	37 lb	\$2,810.00
149549	Universal 115/ 230 VAC 50/60 Hz (NA plug standard) battery charger for MSI-8000 remote display	3 lb	\$155.00
182223	12V car charger adapter for MSI-8000	1 lb	\$135.00
173014	Rugged remote control (requires MSI-7300 equipped with optional RF modem)	-	\$330.00
150964	RS-232 13 ft (4 m) serial cable for MSI-8000	1 lb	\$190.00
139438	Audible setpoint	-	\$420.00
149550	Battery charger for MSI-8000 EC plug	-	\$150.00

CRANE SCALES



# MSI Dyna-Clamp

Tension Meter

CRANE SCALES



Approvals



## Part Number/Price


Part #	Description	Tension	Est. Weight	Price
189581	MSI Dyna-Clamp tension meter	12,500 lbf (5,670 kgf / 55.60 kN)	15 lb	\$4,860.00

## Options/Accessories

Part #	Description	Price
198418	Heavy-duty carrying case	\$610.00

## Dimensions

A	25.70 in (652.80 mm)	C	13.75 in-15.50 in (349.25 mm-393.70 mm)
B	7.30 in (185.50 mm)	D	3.70 in (94 mm)

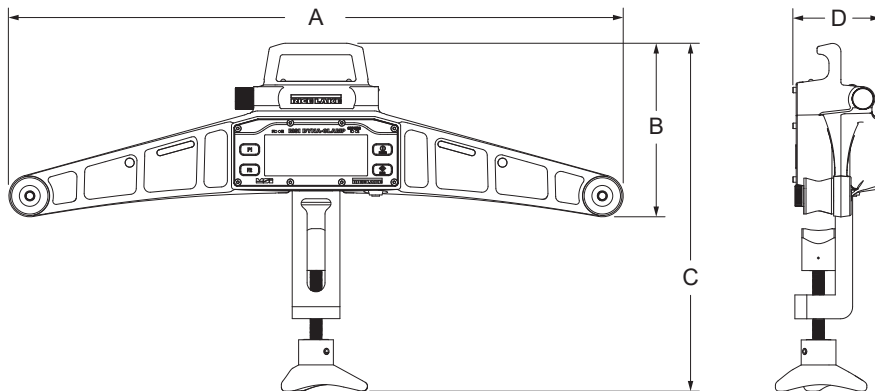

## Standard Features

- Dual line LCD display
- Two user-programmable function keys
- IP65 anodized aluminum frame
- RS-232 port
- Up to 8 factory calibrations included at no additional cost

## Options

(Contact MSI for application consultation)

- Heavy-duty carrying case

## Specifications

### Power:

Battery operated two AA -cell 1.5 V alkaline batteries (can be replaced with rechargeable NiMH cells)

### Max Tension:

12,500 lbf (5,670 kgf / 55.60 kN)

### Operating Time:

Alkaline AA -cells: 24 hours

### Wire Rope:

Diameter 3/16 in (5 mm) to 1 in (25 mm)

### Accuracy:

±3% of capacity

### Units:

lbf, kgf, kN

### Resolution:

Standard: 2,500 divisions

### Display:

Primary display (bottom) six, 0.7 in (18 mm) numeric digits  
Secondary display (top) eight, 0.5 in (13 mm) numeric digits

### Function Keys:

Two programmable keys (user-defined) – F1, F2 (test, unit, print, scroll, actfun)  
Two permanent keys – power, zero

### Setpoints:

Two dedicated setpoints for minimum and maximum allowable wire rope tension (LEDs for measurements outside of allowable range)

### Auto-Off Mode:

Prolongs battery life by turning power OFF after 15, 30, 45 or 60 minutes of no activity (user determined)

### Enclosure:

IP65 powder-coated aluminum frame

### Calibration:

Up to eight factory programmed wire rope calibrations

### Operating Temperature:

-4 °F to 122 °F (-20 °C to 50 °C)

### Operator Use:

Outdoor

### Storage:

Indoor

### Warranty:

Two-year limited

### Approvals:

CE Marked  
UKCA



Part Number/Price


Part #	Description	Price
179080	Load cell assembly Clamp-On for 3/8 to 1/2 in wire rope	\$750.00
179082	Load cell assembly Clamp-On for 9/16 to 3/4 in wire rope	\$890.00
188816	Kit with SCT-2200 for 3/8 to 1/2 in wire rope	\$1,330.00
188817	Kit with SCT-2200 for 9/16 to 3/4 in wire rope	\$1,470.00

Larger diameter clamp ons available - call for pricing

Dimensions

Cable Range	P/N	A	B	C
3/8 - 1/2	179080	Cable + 1.70	6.00	2.00
9/16-3/4	179082	Cable + 1.67	6.00	2.00

\*8mm cable can be used with PN 179080

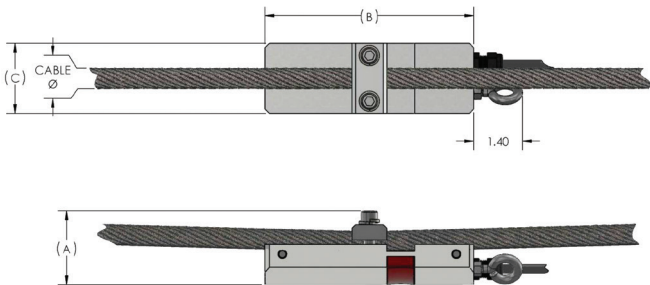

Standard Features

- ETD 150 construction
- Accommodates up to 3/4 in wire rope size
- Larger diameter clamp-on available - call for pricing

Options

(Contact MSI for application consultation)

- Custom sizes available on request
- Pair with an SCT transmitter for basic safety functions

Specifications

System Accuracy of Calibrated Capacity:  
3 to 5%


Material:  
4340 steel, zinc plated

Output Resistance:  
350 ohm

IP Rating:  
IP68

Cable Color Code:  
Red +Excitation  
Black –Excitation  
Green +Signal  
White –Signal

Cable Length:  
20 ft integral cable with blunt end termination



Optional SCT-2200 transmitter



## Standard Features

- Internally gauged load pin
- Idler sheave or dead end pin preferred location
- Minimum 5:1 safety factor
- 17-4 stainless steel construction
- $\pm 1\%$  to 3% accuracy of hoist capacity
- -40 °F to 140 °F standard operating temperature (other temperature compensated ranges available)


(Contact MSI for application consultation)

A key component for MSI's integrated overhead weighing solutions is the Load Pin Sensor. Typically designed and manufactured specifically to each integrated solution, the MSI load pin is strictly industrial grade. Each load pin design is precision machined from 17-4 stainless steel for safety, strength and corrosion resistance.

Each strain gauge location is precisely calculated and correctly placed in the optimum concentrated stress area of each installation. This MSI applied engineering process ensures the most efficient and accurate performance for each specific installation.

MSI load pin designs apply only internally mounted strain gauges for complete protection from the outside environment.

To receive a quotation for a load pin sensor to meet your application requirements, complete the load pin questionnaire on page 197 or online at [www.ricelake.com/questionnaires](http://www.ricelake.com/questionnaires) or contact an MSI overhead weighing specialist for further application assistance.

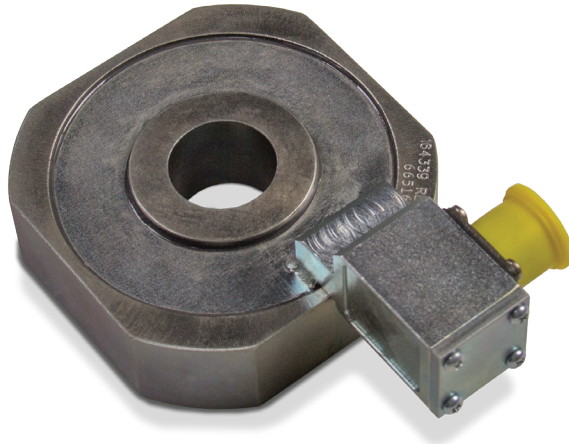

## Standard Features

- Designed to be placed above the trunnion of a load block, this integrated low-profile load cell eliminates headroom loss
- Off-axis compensation

(Contact MSI for application consultation)

## Specifications

### Accuracy (Static Load):

0.5 to 1% system accuracy of rated capacity

### Material:

4340 alloy steel, zinc plated

### IP Rating:

IP67

### Resistance:

700 ohm

## Part Number/Price



Part #	Description	Est. Weight	Price
160651	10,000 lb/5,000 kg capacity	5 lb	Consult
163595	20,000 lb/10,000 kg capacity	10 lb	Consult
163596	40,000 lb/20,000 kg capacity	20 lb	Consult
163829	60,000 lb/30,000 kg capacity	30 lb	Consult
163597	80,000 lb/40,000 kg capacity	34 lb	Consult
163598	100,000 lb/50,000 kg capacity	38 lb	Consult
159550	120,000 lb/60,000 kg capacity	60 lb	Consult
163599	160,000 lb/80,000 kg capacity	105 lb	Consult
163600	200,000 lb/100,000 kg capacity	215 lb	Consult

## Options/Accessories

Part #	Description	Price
165978	Load cell interface cable to TranSend™, 6.5 ft	\$315.00
165979	Load cell interface cable to TranSend, 10 ft	\$340.00
165980	Load cell interface cable to TranSend, 16 ft	\$360.00
165989	Load cell interface cable to TranSend, 20 ft	\$390.00
165990	Load cell interface cable to TranSend, 25 ft	\$420.00
165991	Load cell interface cable to TranSend, 32 ft	\$485.00
134498	Load cell interface cable to CellScale™, 5 ft	\$350.00
134495	Load cell interface cable to CellScale, 10 ft	\$380.00
134500	Load cell interface cable to CellScale, 15 ft	\$400.00
134499	Load cell interface cable to CellScale, 20 ft	\$430.00
134501	Load cell interface cable to CellScale, 25 ft	\$460.00

## Dimensions

Part #	Capacity	A	B	C (+0.005,-0.000)	D	E	F	G	H	Required Hook Shank Diameter (+0.000,-0.005)
160651	10,000 lb	3.500	1.350	1.005	2.450	1.880	4.905	1.500	1.000	1.000
163595	20,000 lb	6.000	2.500	1.505	3.500	2.443	7.405	1.750	1.250	1.500
163596	40,000 lb	7.500	3.150	2.005	5.000	2.580	8.905	2.000	1.375	2.000
163829	60,000 lb	8.000	3.190	2.505	5.250	2.695	9.405	2.188	1.500	2.500
163597	80,000 lb	8.500	3.650	3.505	5.750	2.680	9.905	2.313	1.500	3.500
163598	100,000 lb	9.125	3.873	4.005	7.000	2.382	10.530	2.668	1.875	4.000
159550	120,000 lb	9.125	3.873	4.005	7.000	2.382	10.530	2.813	2.000	4.000
163599	160,000 lb	16.000	7.030	6.005	14.500	2.955	17.405	4.625	2.500	6.000
163600	200,000 lb	16.000	7.030	6.005	14.500	2.955	17.405	5.125	3.000	6.000

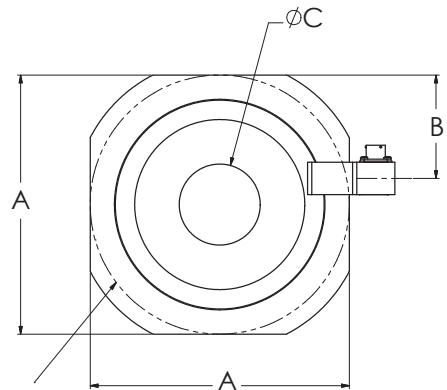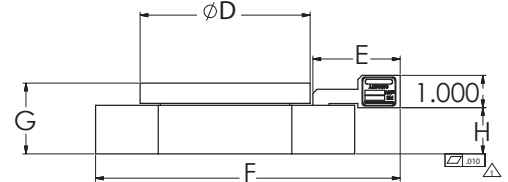

SHOWN AS REFERENCE  
FOR ROUND LOAD CELLS

# MSI Tension Link

Load Cell

CRANE SCALES



## Standard Features

- 4340 steel construction
- Mil spec connector
- 7:1 safety factor

## Options

(Contact MSI for application consultation)

- Crosby® top and bottom shackles

## Specifications

**Input Resistance:**

1,500 ohm

**Output Resistance:**

2,000 ohm

**Full Scale Output:**

0.8 mV/V

**Connector Pin Out:**

A: EX +

B: Sig +

C: Sig —

D: EX —

**Accuracy:**

0.1% sensor accuracy

**Material:**

4340 steel


## Part Number/Price

Part #	Description	Price
181907	2K 7200 style load cell only	Consult
181908	5K 7200 style load cell only	Consult
181909	10K 7200 style load cell only	Consult
178093	25K 7200 style load cell only	Consult
178094	50K 7200 style load cell only	Consult
181910	100K 7200 style load cell only	Consult
134505	Mating cable assembly, 10 ft	\$175.00

Contact factory for higher capacities

## Dimensions


Capacity (lbs)	P/N	Load Cell Material	(A) Headroom Loss	(B) C-C Length	(C) Lug Thk	(D) Body Thk	(E) Body Width	(F) Body Length	Lug Hole	Crosby Shackle
2,000	181907	Aluminum	13.50 in	8.00 in	0.99 in	2.13 in	4.50 in	9.75 in	0.78 in	3-1/4 T 151357
5,000	181908	Aluminum	13.50 in	8.00 in	0.99 in	2.13 in	4.50 in	9.75 in	0.78 in	3-1/7 T 151357
10,000	181909	Aluminum	16.13 in	8.50 in	1.35 in	2.13 in	5.37 in	10.75 in	1.05 in	6-1/2 T 151355
25,000	178093	Steel	22.39 in	9.26 in	2.24 in	2.24 in	4.80 in	12.76 in	1.67 in	17 T 141992
50,000	178094	Steel	25.74 in	9.76 in	2.74 in	2.81 in	5.43 in	13.76 in	2.05 in	25 T 151356
100,000	181910	Steel	28.49 in	10.74 in	3.09 in	3.09 in	6.86 in	15.74 in	2.30 in	55 T 146336

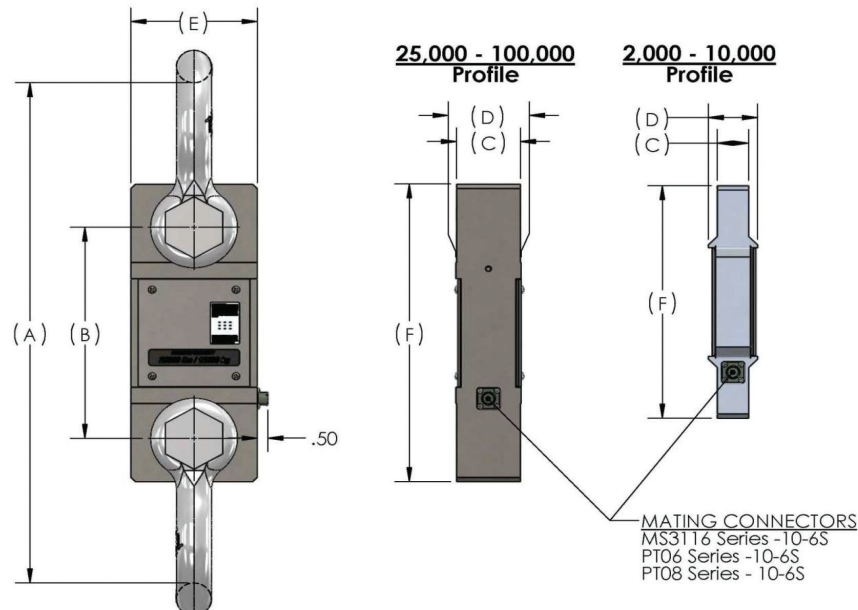

# Shackle Dimensions

## Part Number/Price

Part #	W.L.L. Tons	Size	A	B	C	D	E	F	H	L	N	P	Weight	Price
151357	3 1/4	0.63 in	1.06 in	.75 in	2.38 in	0.63 in	1.69 in	1.56 in	4.22 in	2.94 in	0.69 in	N/A	1.58 lb	Consult
151355	6 1/2	0.88 in	1.44 in	1.00 in	3.31 in	0.88 in	2.28 in	2.13 in	5.75 in	4.03 in	0.97 in	5.00 in	3.95 lb	Consult
141992	17	1.50 in	2.38 in	1.63 in	5.75 in	1.50 in	3.88 in	3.63 in	9.88 in	6.88 in	1.62 in	8.25 in	19.50 lb	Consult
151356	25	1.75 in	2.88 in	2.00 in	7.00 in	1.75 in	5.00 in	4.32 in	11.88 in	8.50 in	2.12 in	9.59 in	31.30 lb	Consult
146334	30	1.50 in	2.38 in	1.63 in	5.75 in	1.50 in	3.88 in	3.63 in	9.88 in	6.88 in	1.62 in	8.25 in	20.80 lb	Consult
146335	40	1.75 in	2.88 in	2.00 in	7.00 in	1.75 in	5.00 in	4.32 in	11.88 in	8.50 in	2.12 in	9.59 in	33.91 lb	Consult
146336	55	2.00 in	3.25 in	2.25 in	7.75 in	2.00 in	5.75 in	5.00 in	13.38 in	9.75 in	2.00 in	11.00 in	51.75 lb	Consult
151359	85	2.5 in	4.12 in	2.75 in	10.50 in	2.72 in	7.25 in	5.69 in	17.84 in	12.87 in	3.12 in	13.58 in	96.00 lb	Consult
151360	120	3.00 in	5.00 in	3.25 in	13.00 in	3.00 in	7.88 in	6.50 in	21.50 in	14.50 in	3.63 in	16.50 in	178.00 lb	Consult
83455	120	3 in	5.00 in	3.25 in	13.00 in	3.11 in	7.88 in	6.50 in	21.50 in	14.36 in	3.63 in	15.13 in	178.00 lb	Consult
151361	175	4.00 in	5.50 in	4.25 in	14.50 in	4.00 in	10.00 in	9.00 in	25.69 in	18.38 in	4.56 in	19.75 in	338.00 lb	Consult
151358	250	4 in	8.50 in	5.00 in	20.00 in	4.50 in	13.00 in	12.00 in	35.00 in	24.50 in	6.50 in	22.68 in	600.00 lb	Consult
<b>Oversized Shackles</b>														
148497	40	1.75 in	2.88 in	2.00 in	10.00 in	2.25 in	6.00 in	4.32 in	15.35 in	10.50 in	2.25 in	9.00 in	45.00 lb	Consult
148393	40	2.25 in	2.88 in	2.00 in	12.50 in	2.25 in	8.00 in	4.32 in	17.85 in	12.50 in	2.25 in	10.00 in	90.00 lb	Consult
148394	50	2.00 in	3.25 in	2.25 in	12.25 in	2.50 in	8.00 in	5.00 in	18.50 in	13.00 in	2.50 in	11.00 in	72.00 lb	Consult
<b>Shims</b>														
146534	(For use with 50,000 ton/70,000 ton systems)													Consult

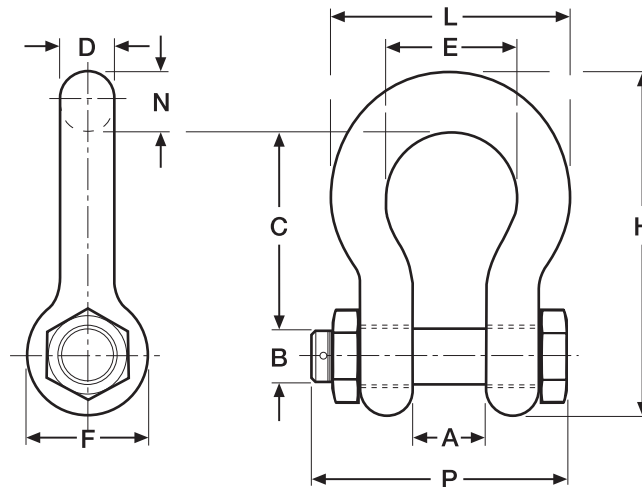

This image shows a full page of blank graph paper. The grid consists of small, uniform squares formed by thin, light gray lines. There are no margins, text, or other markings on the page.



