

Picture is a representation of actual product.

Approvals




Order Information

Load Rating	Part#	Est. Weight	Price	
20,000 lb	17660	30 lb	Consult	
50,000 lb	17661	65 lb	Consult	

Dimensions

Rated Capacity	A	В	С	D	E	F	G	Н	ı	J	К	L	М
lb/in													4.4/2.4211115
20,000	8.50	2.63	2.75	0.50	1.00	3.38	1.38	1.81	1.00	5.81	4.00	5.00	1 1/2-12 UNF × 2 DP
50,000	11.44	3.75	4.00	0.63	1.00	5.00	1.38	1.81	1.00	5.81	5.75	6.50	2-12 UNF × 2.63 DP

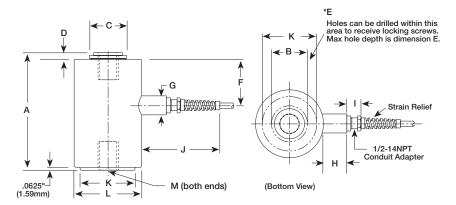

Interchangeable Products

FAIRBANKS®

657090, 657091

STREETER RICHARDSON®

2011711, 2011712

Specifications

Full Scale Output:

2.0 mV/V

Output Resistance:

350 (± 3.5) ohm

Input Resistance:

350 (± 3.5) ohm

Material/Finish:

High-alloy steel, epoxy coated

Temperature:

Operating:

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP67

Safe Overload:

150% full scale

Rated Excitation:

5 to 20 VDC

Combined Error:

 \pm 0.03% full scale

Repeatability: 0.02% full scale

Insulation Resistance: 5,000 megohm

Deflection at Capacity:

20,000 lb: 0.0075 in

50,000 lb: 0.0100 in

Cable Length:

35 ft

Cable Color Code:

Green +Excitation Black -Excitation

White +Signal

Red –Signal Yellow Shield

Warranty:

Three-year limited

Approvals: