

## **Measurement Systems International**

14240 Interurban Avenue South • Seattle, Washington 98168-4660 U.S.A. 206-433-0199 • Fax: 206-244-8470 • URL: www.msiscales.com

# MSI-150-09 Sky-Weigh Specifications Boeing/Kawasaki 107

STC Number (Pending installation

The MSI-150 Sky-Weigh cargo hook load monitoring system is available for virtually every make and model lifting helicopter. Each system is unique to its respective model aircraft. FAA supplemental type certification is available on most systems while others are pending initial installation and application approval.

#### THE MSI SYSTEM

The MSI-150 system consists of a "cargo hook compatible" load sensor, digital indicator and interface cables. Complete installation and FAA docu-

mentation is included with each system. An optional pilot controlled MSI-150XP thermal tape printer is available for recording load data.

The MSI-150XM digital indicator is microprocessor based for maximum precision and performance in any lifting operation. A liquid crystal digital display allows exact load readings without parallax errors even in direct sunlight. Loads may be displayed in pounds or kilograms. Three levels of digital filtering provide stable readings under the most adverse load condi-

tions. Push button controls for Zero and Test are front panel mounted for easy operation. A full function preflight test routine assures reliable and accurate system performance and safe operations. The indicator's compact and environmentally sealed enclosure requires minimum space for easy installation.

Night Vision Goggle compatibility and customized options are available for both military and commercial applications. Please contact our factory with your specific requirements.

## SYSTEM SPECIFICATIONS

Digital Indicator

Display: 4-1/2 digit .35 in./8.9 mm high LCD

with backlighting

Resolution: 10 lbs./10 kgs

**Power:** 24-32 VDC **Functions:** Push button TEST, ZERO, LBS/KG

Dimensions: See diagram Weight: 12 oz./340 g Operating Temperature:

-4° F (-20° C) to 140° F (+60° C)

Load Sensor

Accuracy: Typically 0.1-1.0% over compen-

sated temperature range and dependent on model configuration

Overload: 200% safe 500% ultimate Dimensions:See diagram

Weight: 2.2 lb./1 kg
Operating Temperature:

-4° F (-20° C) to 140° F (+60° C)

### SYSTEM OPTIONS

Thermal Tape Printer
 ASS 150 VP

(see MSI-150XP specifications)

NVG display


(contact factory for specifications)

Display analog output

#### WARRANTY

Load sensor and indicator - 1 Year Interface cables - 90 days

Specifications subject to change without notice.

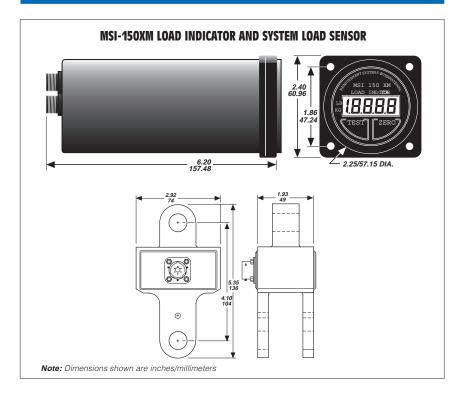

SYSTEM MODEL AND COMPONENT PART NUMBERS							
AIRCRAFT	HOOK	SYSTEM	SYSTEM	INDICATOR	LOAD SENSOR INTERFACE CABLES PART NO.		
MODEL	MFG/MODEL	MODEL	PART NO.	PART NO.	PART NO.	INTERNAL	EXTERNAL
B107 K107	ERC ERC	MSI-150-09 MSI-150-09	D00472-0009 D00472-0019	D00448-0003 D00448-0003	C00075-0009 C00075-0019	40007-0004 40007-0004	40013-42 40013-42