

Picture is a representation of actual product.

## **Approvals**



## **Order Information**


Load Rating	Part#	Est. Weight	Price	
20 ft Cables				
250 lb	17386	3 lb	Consult	
500 lb	17387	3 lb	Consult	
1,000 lb	17189	3 lb	Consult	
2,500 lb	17191	3 lb	Consult	
4,000 lb	17193	3 lb	Consult	
5,000 lb	17194	5 lb	Consult	
10,000 lb	17195	5 lb	Consult	
30 ft Cables				
4,000 lb	95562	3 lb	Consult	
Conduit Adapter Kit (must be factory	installed to maintain v	varranty)		
3/8-24 nipple	31533*	1 lb	Consult	
3/8-24 to 1/4-18 NPT	31534*	1 lb	Consult	

 $<sup>^*</sup>$  PN 31533 and PN 31534 must be installed together to form the Conduit Adapter Kit

G

## **Dimensions**

Rated Capacity	A1	A2	A3	В	С	D	E	F	G	Н
lb/in										
250 to 4,000	1/2-20 UNF	0.60	0.53	5.12	1.25	1.25	0.62	1.00	3.00	0.50
5,000 to 10,000	3/4-16 UNF	0.75	0.78	6.75	1.50	1.50	0.75	1.50	3.75	0.75

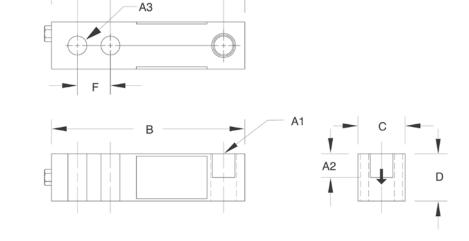

# Interchangeable Products VPG® REVERE 9123..... ARTECH® SS30310 Weigh Module Available RICE LAKE WEIGHING SYSTEMS **RL50210TA**.....page 37 RICE LAKE WEIGHING SYSTEMS RL1800 Series......page 48

# **Specifications**

# **Full Scale Output:**

3.0 mV/V

## **Output Resistance:**

349 to 355 ohm

# **Input Resistance:**

343 to 357 ohm

## Material/Finish:

Stainless steel

### Temperature:

Operating:

0 °F to 150 °F (-18 °C to 65 °C)

## Seal Type:

Environmentally sealed, IP67

## Safe Overload:

150% full scale

# Safe Sideload:

100% full scale

# **Rated Excitation:**

5 to 10 VDC (15 V maximum)

#### Nonlinearity: 0.03% full scale

**Husteresis:** 

0.02% full scale Insulation Resistance:

#### 5,000 megohm

**Deflection at Capacity:** 

250 to 1,000 lb: 0.013 in 2,000 to 3,000 lb:0.015 in 4,000 to 5,000 lb: 0.025 in 10,000 lb: 0.32 in

## Cable Length:

20 ft 30 ft

# Cable Diameter:

0.200 in

Polyurethane jacket

### Cable Color Code:

Red +Excitation Black –Excitation Green +Signal White –Signal

## Warranty:

Two-year limited

## Approvals:

cFMus