


60040

Alloy Steel, Environmentally Sealed, IP65

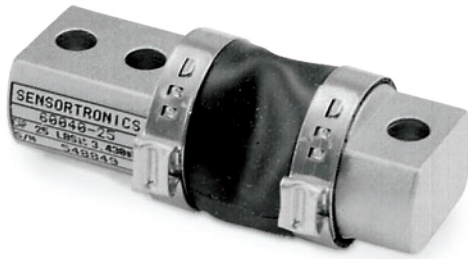

Picture is a representation of actual product

Approvals




Order Information

| Load Rating | Part # | Est. Weight | Price |
|-------------|--------|-------------|---------|
| 25 lb | 17369 | 2 lb | Consult |
| 50 lb | 17370 | 2 lb | Consult |
| 75 lb | 17371 | 2 lb | Consult |
| 100 lb | 17372 | 2 lb | Consult |
| 150 lb | 17373 | 2 lb | Consult |
| 250 lb | 17374 | 2 lb | Consult |
| 500 lb | 17375 | 2 lb | Consult |

Dimensions

| Rated Capacity | A | B | C | D | E | F | G | H | I | J |
|----------------|------|------|------|------|------|------|------|------|------|------|
| lb/in | | | | | | | | | | |
| 25 to 500 | 2.81 | 1.30 | 0.62 | 0.26 | 0.25 | 0.50 | 1.81 | 1.00 | 1.00 | 0.50 |

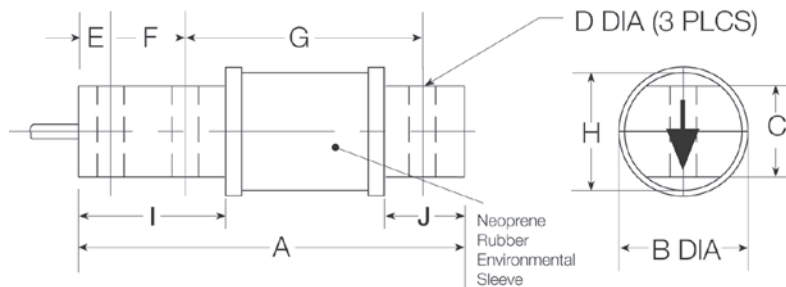

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS
RL50210..... page 132
 VPG® REVERE®
5503
 ARTECH®
50210

Specifications

- Full Scale Output:**
3.0 mV/V
- Output Resistance:**
349 to 355 ohm
- Input Resistance:**
380 to 450 ohm
- Material/Finish:**
High-alloy steel, nickel plated
- Temperature:**
Operating range
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Environmentally sealed with a neoprene sleeve, IP65
- Safe Overload:**
150% full scale
- Rated Excitation:**
5 to 10 VDC (15 V maximum)
- Nonlinearity:**
0.03% full scale
- Hysteresis:**
0.02% full scale
- Insulation Resistance:**
5,000 megohm
- Deflection at Capacity:**
25 to 50 lb: 0.008 in
75 to 100 lb: 0.010 in
150 lb: 0.012 in
250 lb: 0.016 in
500 lb: 0.025 in
- Cable Length:**
20 ft
- Cable Diameter:**
0.200 in
Polyurethane jacket
- Cable Color Code:**
Red +Excitation
Black -Excitation
Green +Signal
White -Signal
- Warranty:**
One-year limited
- Approvals:**
cFMus