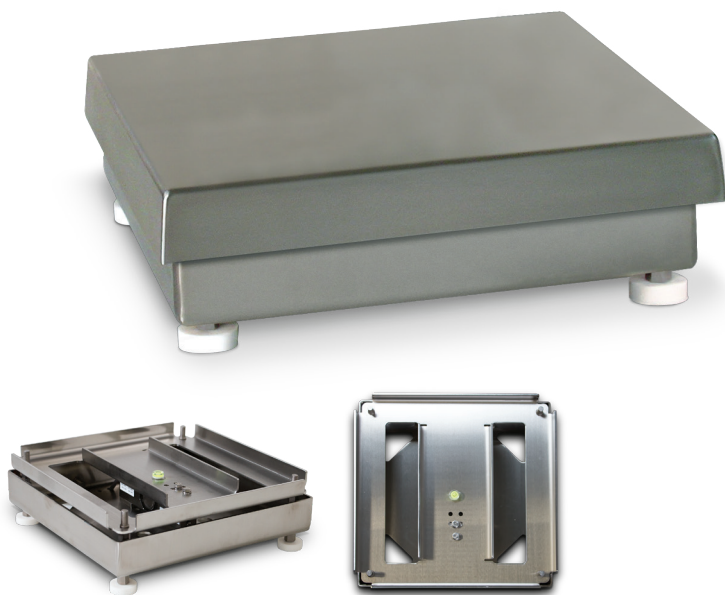


CW-90B

Light Capacity Bench Scales

**Specifications****Load Cell, OIML Approved:**

Aluminum and environmentally sealed

Output Impedance:

350 ohms

Overload Protection:

Five point, independently adjusted

Cable Length:

864 mm or 3 m

Compensated Temperature Range:

-10° C to 40° C

Warranty:

Two-year limited warranty

Standard Features

- 304 stainless steel construction
- Five point overload protection
- Specially designed adjustable support feet provide exceptional traction and will not scratch surfaces
- Aluminum environmentally sealed load cell

Approvals

Additional models are available with the approvals shown here
Please consult the factory for part numbers.



Measurement
Canada
Approved



**Part Number/Price**

Part #	Capacity	Dimensions L x W x H	L1/W1	Est. Weight	Price
864 mm cable					
124320	3 kg	254 x 254 x 108 mm	263 mm	6,4 kg	Consult
124321	6 kg	254 x 254 x 108 mm	263 mm	6,4 kg	Consult
124322	15 kg	254 x 254 x 108 mm	263 mm	6,4 kg	Consult
124323	15 kg	305 x 305 x 108 mm	314 mm	7,7 kg	Consult
124324	30 kg	305 x 305 x 108 mm	314 mm	7,7 kg	Consult
124325	60 kg	305 x 305 x 108 mm	314 mm	7,7 kg	Consult
3 m cable					
124314	3 kg	254 x 254 x 108 mm	263 mm	6,4 kg	Consult
124315	6 kg	254 x 254 x 108 mm	263 mm	6,4 kg	Consult
124316	15 kg	254 x 254 x 108 mm	263 mm	6,4 kg	Consult
124317	15 kg	305 x 305 x 108 mm	314 mm	7,7 kg	Consult
124318	30 kg	305 x 305 x 108 mm	314 mm	7,7 kg	Consult
124319	60 kg	305 x 305 x 108 mm	314 mm	7,7 kg	Consult

Options/Accessories

Part #	Description	Price
112044	305 mm column for CW-90, CW-90X, 480 and 482 Legend™ Series	Consult
112045**	257 mm column for CW-90, CW-90X, 480 and 482 Legend™ Series	Consult
N/A	Installation, testing, configuration and verification	Consult factory

** Not recommended for use with scale bases smaller than 305 x 305 mm

**Drawing Dimensions****10 in x 10 in**

A	108 mm	C	254 mm
B	254 mm	C1	263 mm
B1	263 mm		

12 in x 12 in

A	108 mm	C	305 mm
B	305 mm	C1	314 mm
B1	314 mm		