



BARIATRIC HANDRAIL SCALES

250-10-2

BARIATRIC HANDRAIL SCALE

Rice Lake's 250-10-2 bariatric scale with handrail is designed for weighing patients who need extra support and safety. Advanced movement compensation technology eliminates errors caused by involuntary movement of unsteady patients. Two heavy-duty rear wheels make it simple and effortless to move and store.



FEATURES

- Large LCD display
- Antimicrobial keypad
- Handrail for support and safety
- Two wheels for easy transport
- Nonslip platform
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

SPECIFICATIONS

Capacity:
1,000 × 0.2 lb (450 × 0.1 kg)

Platform Dimensions:
(L × W × H)
25.00 × 20.00 × 3.00 in

Power:
9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:
Six AA alkaline (included)

Battery Use:
25 hours continuous use with batteries
Automatic power-off can be configured

Display:
5-digit LCD display, 0.75 in (1.9 cm) digit height

Temperature:
Operating:
50 °F to 104 °F (10 °C to 40 °C)

Warranty:
Two-year limited



Back wheels
for easy transport



BARIATRIC HANDRAIL SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
250-10-2	1,000 × 0.2lb (450 × 0.1kg)	USB	133119
250-10-2BLE	1,000 × 0.2lb (450 × 0.1kg)	Bluetooth® BLE 4.0	194733

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching, medical grade, cULus recognized	115655
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091

*NEMA 1-15 Plug 


**CEE 7/16 Plug 

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
250-10-2	133119	45	29	9	66	85	85
250-10-2BLE	194733	45	29	9	66	85	85

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	20.00	50.8	E	32.84	83.4
B	25.00	63.5	F	34.34	87.2
C	3.00	7.6	G	44.50	113.0
D	25.00	63.5	H	21.00	53.3

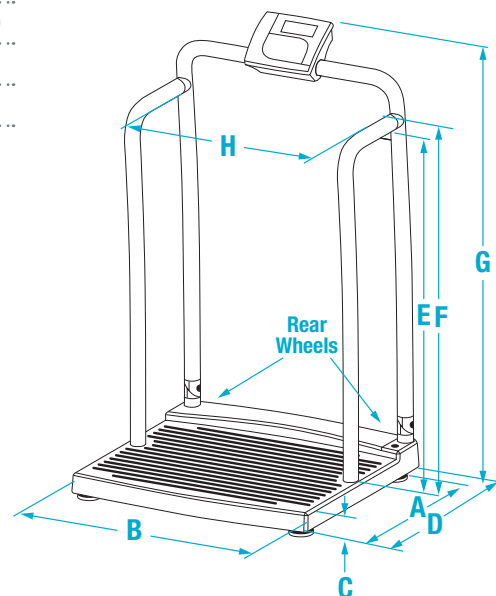

An ISO 9001 Registered Company ©2026 Rice Lake Weighing Systems 01/26
Specifications subject to change without notice. Visit ricelake.com

PG
27



WITH SEAT

250-10-4

BARIATRIC HANDRAIL SCALE

Rice Lake's 250-10-4 bariatric scale with handrail and chair seat is designed for weighing patients who need extra support and safety during weighments. Patients can be weighed comfortably and safely while seated with the large, stable folding seat. Advanced movement compensation technology eliminates errors caused by involuntary movement of unsteady patients. Two heavy-duty rear wheels make it simple and effortless to move and store.



FEATURES

- Large LCD display
- Antimicrobial keypad
- Handrail for support and safety
- Padded seat with backrest
- Two wheels for easy transport
- Nonslip platform
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication ports
- Bluetooth® BLE 4.0 available, part number selectable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated

SPECIFICATIONS

Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

Platform Dimensions:

(L × W × H)
25.00 × 20.00 × 3.00 in

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Display:

5-digit LCD display, 0.75 in (1.9 cm) digit height

Temperature:

Operating:
50 °F to 104 °F (10 °C to 40 °C)

Warranty:

Two-year limited





BARIATRIC HANDRAIL SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
250-10-4	1,000 × 0.2lb (450 × 0.1 kg)	USB	133120
250-10-4BLE	1,000 × 0.2lb (450 × 0.1 kg)	Bluetooth® BLE 4.0	194734

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching, medical grade, cULus recognized	115655
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091

*NEMA 1-15 Plug



**CEE 7/16 Plug




SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
250-10-4	133120	32	27	46	70	286	286
250-10-4BLE	194734	32	27	46	70	286	286

DIMENSIONS


	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	3.00	7.6	F	47.50	120.7
B	25.00	63.5	G	20.00	50.8
C	20.00	50.8	H	12.00	30.5
D	22.00	56.1	I	34.00	91.3
E	32.00	81.1			

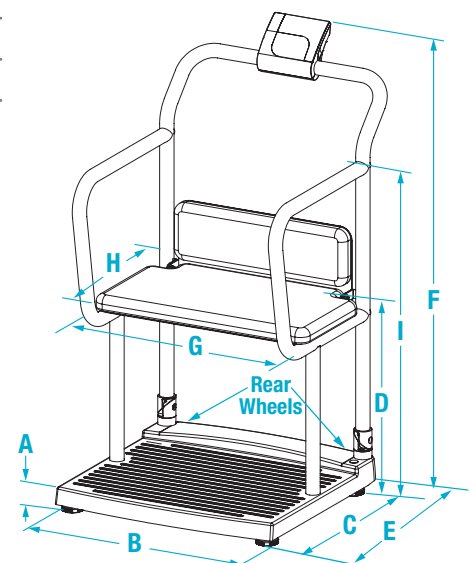

260-10-1

BARIATRIC HANDRAIL SCALE

Rice Lake's 260-10-1 bariatric scale with handrail is designed for weighing patients who need extra support and safety. Height and weight can be seamlessly captured with the optional integrated height rod. Advanced movement compensation technology eliminates errors caused by involuntary movement of unsteady patients. Two heavy-duty rear wheels make it simple and effortless to move and store.



Back wheels
for easy transport

FEATURES

- Large LCD display
- Antimicrobial keypad
- Handrail for support and safety
- Two wheels for easy transport
- Nonslip platform
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Tare function
- Hold function
- BMI (body mass index) function
- Factory calibrated
- Optional height rod can be installed on-site

SPECIFICATIONS

Capacity:

800 × 0.2 lb (360 × 0.1 kg)

Platform Dimensions:

(L × W × H)

23.50 x 23.50 x 2.75 in

Optional Height Rod Dimensions:

30 to 83.12 in (77 to 211 cm)

Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

Battery Type:

Six AA alkaline (included)

Battery Use:

25 hours continuous use with batteries
Automatic power-off can be configured

Display:

5-digit LCD display, 0.75 in (1.9 cm)
digit height

Temperature:

Operating:
50 °F to 104 °F (10 °C to 40 °C)

Warranty:

Two-year limited



BARIATRIC HANDRAIL SCALE

MODEL	CAPACITY	COMMUNICATION	PART #
260-10-1	800 × 0.2lb (360 × 0.1 kg)	USB	170139

OPTIONS

DESCRIPTION	PART #
9 VDC adapter, 120 V/230 V auto switching*	133077
9 VDC adapter, 230 V**	102508
Height rod 25.5-83 in (65-211 cm)	172958
Epson TM-U220 tape printer	81076
Cable, RS232 scale to printer, 6 ft, 25-pin D-Sub (male) to RJ45	186830
Cable, USB 6 ft USB-A (male) to USB-B (male)	79074
Cable, Communication DB9 (female) to RJ45 (male), 4 conductor	217091

*NEMA 1-15 Plug 

**CEE 7/16 Plug 

SHIPPING WEIGHT

MODEL #	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
260-10-1	170139	40	40	10	58	116	116
Height Rod	172958	33	9	3	3	7	7

DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	23.50	59.7	D	25.50	64.8
B	23.50	59.7	E	33.50	85.1
C	2.75	7.0	F	43.00	109.2

