

# **BARIATRIC HANDRAIL SCALES**

# 250-10-2

## BARIATRIC HANDRAIL SCALE

Rice Lake's 250-10-2 bariatric scale with handrails is designed for weighing patients who need extra support and safety. Advanced movement compensation technology eliminates errors caused by involuntary movement of unsteady patients. Two heavy-duty rear wheels make it simple and effortless to move and store.



### FEATURES

- Large LCD display
- Antimicrobial keypad
- Handrails for support and safety
- Two wheels for easy transport
- Nonslip platform
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Tare function
- Hold function
- Body mass index (BMI) function
- Factory calibrated

### SPECIFICATIONS

**Capacity:**  
1,000 × 0.2 lb (450 × 0.1 kg)

**Platform Dimensions:**  
(L × W × H)  
25.00 × 20.00 × 3.00 in

**Power:**  
9 VDC, provided by six  
AA alkaline batteries (included)  
or AC adapter (optional)

**Battery Type:**  
Six AA alkaline (included)

**Battery Use:**  
25 hours continuous use with batteries  
Automatic power-off can be configured

**Display:**  
Five-digit LCD display, 0.75 in (1.9 cm)  
digit height

**Temperature:**  
Operating:  
50 °F to 104 °F (10 °C to 40 °C)

**Warranty:**  
Two-year limited



Back wheels  
for easy transport



## BARIATRIC HANDRAIL SCALE

| MODEL       | CAPACITY                    | COMMUNICATION | PART # |
|-------------|-----------------------------|---------------|--------|
| 250-10-2    | 1,000 × 0.2lb (450 × 0.1kg) | USB           | 133119 |
| 250-10-2BLE | 1,000 × 0.2lb (450 × 0.1kg) | WPAN          | 194733 |

## OPTIONS

| DESCRIPTION   | PART # |
|---|--------|
| 9VDC adapter, 100-240V, NEMA 1-15 plug, cULus power supply*         | 133077 |
| 9VDC adapter, 100-240V, NEMA 1-15 plug, medical grade power supply  | 115655 |
| 9VDC adapter, 100-240V, CEE 7/16 plug, medical grade power supply** | 102508 |

\*NEMA 1-15 Plug



\*\*CEE 7/16 Plug




## SHIPPING WEIGHT

| MODEL #     | PART # | L (IN) | W (IN) | H (IN) | PACKAGE WGT. (LB) | DIM WGT. (LB) | SHIPPING WGT. (LB) |
|-------------|--------|--------|--------|--------|-------------------|---------------|--------------------|
| 250-10-2    | 133119 | 45     | 29     | 9      | 66                | 85            | 85                 |
| 250-10-2BLE | 194733 | 45     | 29     | 9      | 66                | 85            | 85                 |

## DIMENSIONS

|          | INCHES | CENTIMETERS |          | INCHES | CENTIMETERS |
|----------|--------|-------------|----------|--------|-------------|
| <b>A</b> | 20.00  | 50.8        | <b>E</b> | 32.84  | 83.4        |
| <b>B</b> | 25.00  | 63.5        | <b>F</b> | 34.34  | 87.2        |
| <b>C</b> | 3.00   | 7.6         | <b>G</b> | 44.50  | 113.0       |
| <b>D</b> | 25.00  | 63.5        | <b>H</b> | 21.00  | 53.3        |

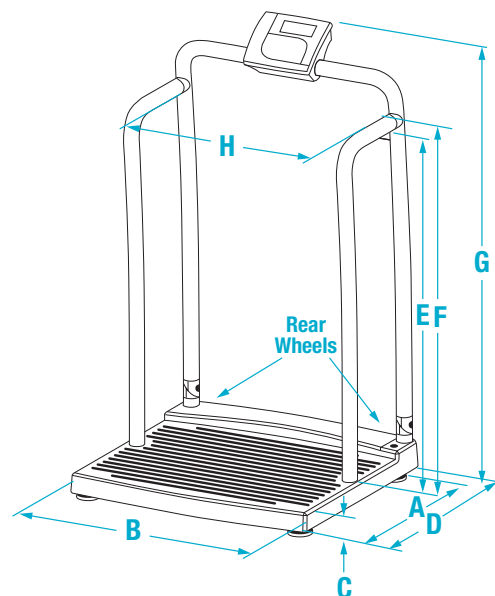

WITH SEAT

# 250-10-4

## BARIATRIC HANDRAIL SCALE

Rice Lake's 250-10-4 bariatric scale with handrails and chair seat is designed for weighing patients who need extra support. Patients can be weighed comfortably and safely while seated with the large, stable folding seat. Advanced movement compensation technology eliminates errors caused by involuntary movement of unsteady patients. Two heavy-duty rear wheels make it simple and effortless to move and store.



### FEATURES

- Large LCD display
- Antimicrobial keypad
- Handrails for support and safety
- Padded seat with backrest
- Two wheels for easy transport
- Nonslip platform
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Serial and USB data communication ports
- Wireless personal area network (WPAN) option available
- Tare function
- Hold function
- Body mass index (BMI) function
- Factory calibrated

### SPECIFICATIONS

#### Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

#### Platform Dimensions:

(L × W × H)  
25.00 × 20.00 × 3.00 in

#### Power:

9 VDC, provided by six  
AA alkaline batteries (included)  
or AC adapter (optional)

#### Battery Type:

Six AA alkaline (included)

#### Battery Use:

25 hours continuous use with batteries  
Automatic power-off can be configured

#### Display:

Five-digit LCD display, 0.75 in (1.9 cm)  
digit height

#### Temperature:

Operating:  
50 °F to 104 °F (10 °C to 40 °C)

#### Warranty:

Two-year limited





## BARIATRIC HANDRAIL SCALE

| MODEL       | CAPACITY                     | COMMUNICATION | PART # |
|-------------|------------------------------|---------------|--------|
| 250-10-4    | 1,000 × 0.2lb (450 × 0.1 kg) | USB           | 133120 |
| 250-10-4BLE | 1,000 × 0.2lb (450 × 0.1 kg) | WPAN          | 194734 |

## OPTIONS

| DESCRIPTION   | PART # |
|---|--------|
| 9VDC adapter, 100-240V, NEMA 1-15 plug, cULus power supply*         | 133077 |
| 9VDC adapter, 100-240V, NEMA 1-15 plug, medical grade power supply  | 115655 |
| 9VDC adapter, 100-240V, CEE 7/16 plug, medical grade power supply** | 102508 |


\*NEMA 1-15 Plug  \*\*CEE 7/16 Plug 

## SHIPPING WEIGHT

| MODEL #     | PART # | L (IN) | W (IN) | H (IN) | PACKAGE WGT. (LB) | DIM WGT. (LB) | SHIPPING WGT. (LB) |
|-------------|--------|--------|--------|--------|-------------------|---------------|--------------------|
| 250-10-4    | 133120 | 32     | 27     | 46     | 70                | 286           | 286                |
| 250-10-4BLE | 194734 | 32     | 27     | 46     | 70                | 286           | 286                |

## DIMENSIONS

|          | INCHES | CENTIMETERS |          | INCHES | CENTIMETERS |
|----------|--------|-------------|----------|--------|-------------|
| <b>A</b> | 3.00   | 7.6         | <b>F</b> | 47.50  | 120.7       |
| <b>B</b> | 25.70  | 65.3        | <b>G</b> | 20.00  | 50.8        |
| <b>C</b> | 25.20  | 64.0        | <b>H</b> | 12.00  | 30.5        |
| <b>D</b> | 21.60  | 54.9        | <b>I</b> | 36.00  | 91.4        |
| <b>E</b> | 32.00  | 81.1        |          |        |             |

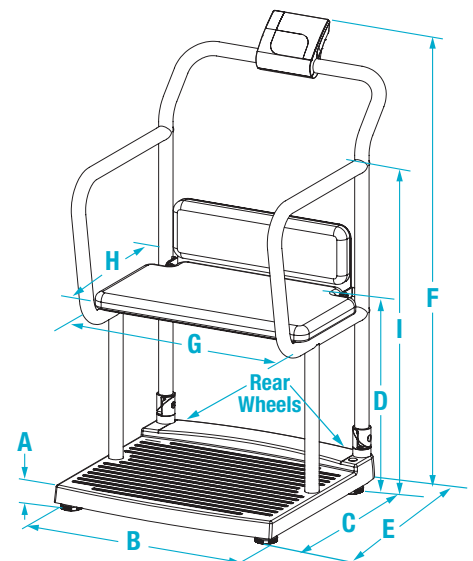

# 260-10-1

## BARIATRIC HANDRAIL SCALE

Rice Lake's 260-10-1 bariatric scale with handrails is designed for weighing patients who need extra support and safety. Height and weight can be seamlessly captured with the optional integrated height rod. Advanced movement compensation technology eliminates errors caused by involuntary movement of unsteady patients. Two heavy-duty rear wheels make it simple and effortless to move and store.



### FEATURES

- Large LCD display
- Antimicrobial keypad
- Handrails for support and safety
- Two wheels for easy transport
- Nonslip platform
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- EMR capable
- Tare function
- Hold function
- Body mass index (BMI) function
- Factory calibrated
- Optional height rod can be installed on-site

### SPECIFICATIONS

#### Capacity:

800 × 0.2 lb (360 × 0.1 kg)

#### Platform Dimensions:

(L × W × H)  
23.50 x 23.50 x 2.75 in

#### Optional Height Rod Dimensions:

30 to 83.12 in (77 to 211 cm)

#### Power:

9 VDC, provided by six  
AA alkaline batteries (included)  
or AC adapter (optional)

#### Battery Type:

Six AA alkaline (included)

#### Battery Use:

25 hours continuous use with batteries  
Automatic power-off can be configured

#### Display:

Five-digit LCD display, 0.75 in (1.9 cm)  
digit height

#### Temperature:

Operating:  
50 °F to 104 °F (10 °C to 40 °C)

#### Warranty:

Two-year limited



Back wheels  
for easy transport



## BARIATRIC HANDRAIL SCALE

| MODEL    | CAPACITY                   | COMMUNICATION | PART # |
|----------|----------------------------|---------------|--------|
| 260-10-1 | 800 × 0.2lb (360 × 0.1 kg) | USB           | 170139 |

## OPTIONS

| DESCRIPTION   | PART # |
|---|--------|
| 9VDC adapter, 100-240V, NEMA 1-15 plug, cULus power supply*         | 133077 |
| 9VDC adapter, 100-240V, CEE 7/16 plug, medical grade power supply** | 102508 |
| Height rod 30 to 83 in (77 to 210 cm)                               | 172958 |

\*NEMA 1-15 Plug



\*\*CEE 7/16 Plug



## SHIPPING WEIGHT

| MODEL #    | PART # | L (IN) | W (IN) | H (IN) | PACKAGE WGT. (LB) | DIM WGT. (LB) | SHIPPING WGT. (LB) |
|------------|--------|--------|--------|--------|-------------------|---------------|--------------------|
| 260-10-1   | 170139 | 40     | 40     | 10     | 58                | 116           | 116                |
| Height Rod | 172958 | 33     | 9      | 3      | 3                 | 7             | 7                  |

## DIMENSIONS

|          | INCHES | CENTIMETERS |          | INCHES | CENTIMETERS |
|----------|--------|-------------|----------|--------|-------------|
| <b>A</b> | 23.50  | 59.7        | <b>D</b> | 25.50  | 64.8        |
| <b>B</b> | 23.50  | 59.7        | <b>E</b> | 33.50  | 85.1        |
| <b>C</b> | 2.75   | 7.0         | <b>F</b> | 43.00  | 109.2       |

