

Checkweighers

TABLE OF CONTENTS

IQ Plus® 2100 **308**
Digital Bench Scale

IQ Plus® 2100SL..... **310**
Digital Bench Scale

CW-90..... **312**
Over/Under Checkweigher

CW-90X **314**
Over/Under Washdown Checkweigher

Product names, logos, brands and other trademarks featured
or referred to within this publication are the property of their respective trademark holders.

IQ Plus® 2100

Digital Bench Scale



IQ plus 2100 with attachment bracket



IQ plus 2100 with column



IQ plus 2100 with tilt stand



Approvals




Dimensions

Platform Dimensions	L	L1
10 × 10 in	10.25 in	10 in
12 × 12 in	12.25 in	12 in

Note: 1 in=25.4 mm

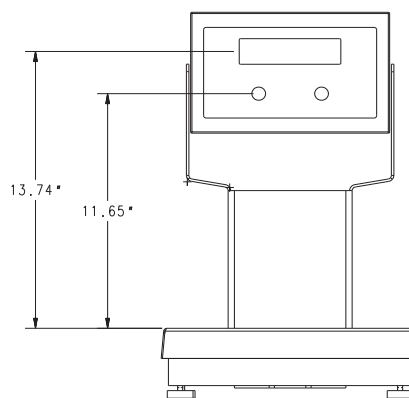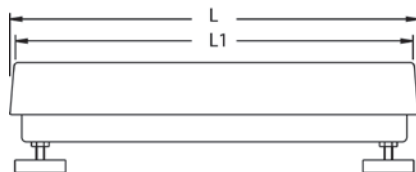

With 12 in column

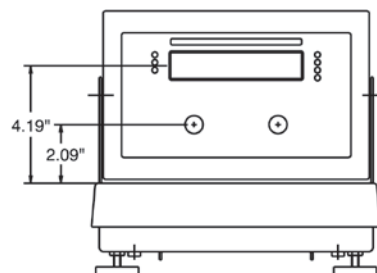

With attachment bracket

Standard Features

- NEMA Type 4X/IP66
- 304 stainless steel construction
- Large, bold 0.8 in LED display
- Status annunciators: lb, kg, oz, g, negative, motion, center of zero
- One full-duplex RS-232 port
- Two digital inputs for remote zero, print and units
- 12 in column, attachment bracket or tilt stand for table, wall or under counter mounting
- Aluminum, single-point load cell
- Overload and upload stops on scale base
- Stainless steel, non-tactile feel, piezo zero and units buttons
- Unit of measure: kg, gm, lb, oz, lb/oz (lb/oz is not Legal for Trade)
- PreVent™ breather vent
- Factory calibrated

Specifications

Power-AC:

Line Voltages
115 or 230 VAC

Frequency:

50 or 60 Hz

Power Consumption:

70 mA at 115 VAC (8 W)
35 mA at 230 VAC (8 W)

Display Resolution:

10,000 graduations maximum

Digital Inputs:

Two inputs, TTL or switch closure, active-low

Scale Frame:

AISI304L, straight line finish, Ra=45 +/- 10

Scale Cover:

AISI304L, straight line finish, Ra=45 +/- 10

Serial Communications:

Full-duplex RS-232; 9600, 4800, 2400, 1200 bps;
seven or eight data bits; even, odd or no parity

Display:

Six-digit light-emitting diode (LED) display
Seven-segment, 0.8 in (20 mm) digits

LED Annunciators:

Negative value, center of zero, motion, kg, g, lb, oz

Keypad:

Two stainless steel piezo switches

Operating Temperature:

14 °F to 104 °F (-10 °C to 40 °C)

Rating/Material:

NEMA Type 4X/IP66, stainless steel

Load Cell:

Aluminum, environmentally sealed

Warranty:

Two-year limited

Approvals:

Indicator:

NTEP CC 00-045 Class III/IIIL 10,000 d
Measurement Canada AM-5374;
cULus listed

Base:

NTEP CC 95-072, Class III 5,000 d

Part Number/Price

Part #	Capacity	Platform Size*	Est. Weight	Price
IQ plus 2100 with tilt stand - 115 VAC				
63053[†]	5 lb × 0.001 lb (2.5 kg × 0.0005 kg) (2,500 g × 0.5 g) (80 oz × 0.02 oz)	10 × 10 in	23 lb	\$1,355.00
63052[†]	10 lb × 0.002 lb (5 kg × 0.001 kg) (5,000 g × 1 g) (160 oz × 0.05 oz)	10 × 10 in	23 lb	\$1,355.00
63051[†]	25 lb × 0.005 lb (10 kg × 0.002 kg) (10,000 g × 2 g) (400 oz × 0.10 oz)	10 × 10 in	23 lb	\$1,355.00
63050[†]	50 lb × 0.01 lb (25 kg × 0.005 kg) (25,000 g × 5 g) (800 oz × 0.20 oz)	12 × 12 in	26 lb	\$1,445.00
63049[†]	100 lb × 0.02 lb (50 kg × 0.01 kg) (50,000 g × 10 g) (1,600 oz × 0.50 oz)	12 × 12 in	26 lb	\$1,445.00
IQ plus 2100 with attachment bracket - 115 VAC				
63043[†]	5 lb × 0.001 lb (2.5 kg × 0.0005 kg) (2,500 g × 0.5 g) (80 oz × 0.02 oz)	10 × 10 in	23 lb	\$1,355.00
63042[†]	10 lb × 0.002 lb (5 kg × 0.001 kg) (5,000 g × 1 g) (160 oz × 0.05 oz)	10 × 10 in	23 lb	\$1,355.00
63041[†]	25 lb × 0.005 lb (10 kg × 0.002 kg) (10,000 g × 2 g) (400 oz × 0.10 oz)	10 × 10 in	23 lb	\$1,355.00
63040[†]	50 lb × 0.01 lb (25 kg × 0.005 kg) (25,000 g × 5 g) (800 oz × 0.20 oz)	12 × 12 in	26 lb	\$1,445.00
63039[†]	100 lb × 0.02 lb (50 kg × 0.01 kg) (50,000 g × 10 g) (1,600 oz × 0.50 oz)	12 × 12 in	26 lb	\$1,445.00
IQ plus 2100 with 12 in column - 115 VAC				
63048[†]	5 lb × 0.001 lb (2.5 kg × 0.0005 kg) (2,500 g × 0.5 g) (80 oz × 0.02 oz)	10 × 10 in	25 lb	\$1,355.00
63047[†]	10 lb × 0.002 lb (5 kg × 0.001 kg) (5,000 g × 1 g) (160 oz × 0.05 oz)	10 × 10 in	25 lb	\$1,355.00
63046[†]	25 lb × 0.005 lb (10 kg × 0.002 kg) (10,000 g × 2 g) (400 oz × 0.10 oz)	10 × 10 in	25 lb	\$1,355.00
63045[†]	50 lb × 0.01 lb (25 kg × 0.005 kg) (25,000 g × 5 g) (800 oz × 0.20 oz)	12 × 12 in	28 lb	\$1,445.00
63044[†]	100 lb × 0.02 lb (50 kg × 0.01 kg) (50,000 g × 10 g) (1,600 oz × 0.50 oz)	12 × 12 in	28 lb	\$1,445.00



[†] NEMA 5-15 plug

IQ Plus® 2100SL

Digital Bench Scale



IQ plus 2100SL with attachment bracket



IQ plus 2100 with tilt stand

IQ plus 2100 with column




Approvals





Dimensions

Platform Dimensions	L	L1
10 × 10 in	10.25 in	10 in
12 × 12 in	12.25 in	12 in

Note: 1 in=25.4 mm

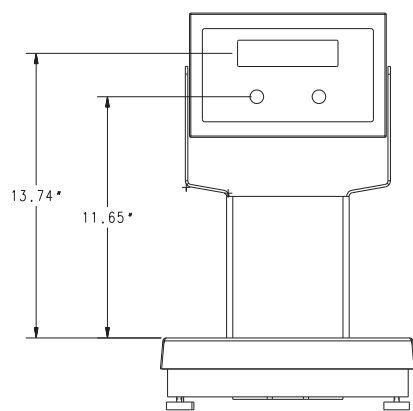

With 12 in column

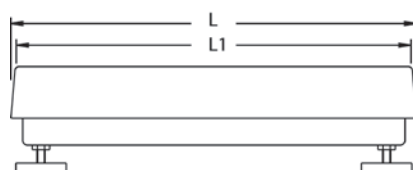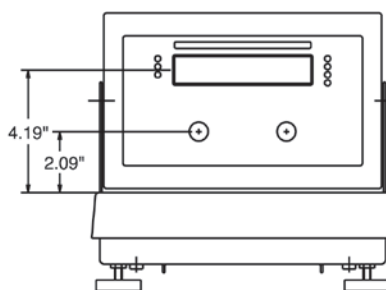

Standard Features

- NEMA Type 4X/IP66
- 304 stainless steel construction
- Large, bold 0.8-inch LED display
- Status annunciators: lb, kg, oz, g, negative, motion, center of zero
- One full-duplex RS-232 port
- Two digital inputs for remote zero, print and units
- 12-inch column, attachment bracket or tilt stand for table, wall or under counter mounting
- Aluminum, single-point load cell
- Overload and upload stops on scale base
- Stainless steel, non-tactile feel, piezo zero and units buttons
- Unit of measure: kg, gm, lb, oz, lb/oz (lb/oz is not Legal for Trade)
- PreVent™ breather vent
- Spring-loaded platform
- Factory calibrated

Specifications

Power-AC:

Line Voltages:

115 or 230 VAC

Frequency:

50 or 60 Hz

Power Consumption:

70 mA at 115 VAC (8 W)

35 mA at 230 VAC (8 W)

Display Resolution:

10,000 graduations maximum

Digital Inputs:

Two inputs, TTL or switch closure, active-low

Scale Frame:

AISI304L, straight line finish, Ra=45 +/- 10

Scale Cover:

AISI304L, straight line finish, Ra=45 +/- 10

Serial Communications:

Full-duplex RS-232; 9600, 4800, 2400, 1200 bps; seven or eight data bits; even, odd or no parity

Display:

Six-digit LED display
Seven-segment, 0.8 in (20 mm) digits

LED Annunciators:

Negative value, center of zero, motion, kg, g, lb, oz

Keypad:

Two stainless steel piezo switches

Operating Temperature:

14 °F to 104 °F (-10 °C to 40 °C)

Rating/Material:

NEMA Type 4X/IP66, stainless steel

Load Cell:

Aluminum, environmentally sealed

Warranty:

Two-year limited

Approvals:

Indicator:

NTEP CC 00-045 Class III/IIIL 10,000 d

Measurement Canada, AM-5374;

UL and C-UL listed

Base:

NTEP CC 95-072, Class III 5,000 d

Part Number/Price

Part #	Capacity	Platform Size*	Est. Weight	Price
IQ plus 2100SL with tilt stand - 115 VAC				
65168[†]	5 lb × 0.001 lb (2.5 kg × 0.0005 kg) (2,500 g × 0.5 g) (80 oz × 0.02 oz)	10 × 10 in	21 lb	\$1,405.00
65169[†]	10 lb × 0.002 lb (5 kg × 0.001 kg) (5,000 g × 1 g) (160 oz × 0.05 oz)	10 × 10 in	21 lb	\$1,405.00
65170[†]	20 lb × 0.005 lb (10 kg × 0.002 kg) (10,000 g × 2 g) (320 oz × 0.1 oz)	10 × 10 in	21 lb	\$1,405.00
65171[†]	30 lb × 0.01 lb (15 kg × 0.005 kg) (15,000 g × 5 g) (480 oz × 0.1 oz)	10 × 10 in	21 lb	\$1,405.00
65172[†]	30 lb × 0.01 lb (15 kg × 0.005 kg) (15,000 g × 5 g) (480 oz × 0.1 oz)	12 × 12 in	24 lb	\$1,495.00
65173[†]	50 lb × 0.01 lb (25 kg × 0.005 kg) (25,000 g × 5 g) (800 oz × 0.20 oz)	12 × 12 in	24 lb	\$1,495.00
65174[†]	100 lb × 0.02 lb (50 kg × 0.01 kg) (50,000 g × 10 g) (1,600 oz × 0.50 oz)	12 × 12 in	24 lb	\$1,495.00
IQ plus 2100SL with attachment bracket - 115 VAC				
65175[†]	5 lb × 0.001 lb (2.5 kg × 0.0005 kg) (2,500 g × 0.5 g) (80 oz × 0.02 oz)	10 × 10 in	21 lb	\$1,405.00
65176[†]	10 lb × 0.002 lb (5 kg × 0.001 kg) (5,000 g × 1 g) (160 oz × 0.05 oz)	10 × 10 in	21 lb	\$1,405.00
65177[†]	20 lb × 0.005 lb (10 kg × 0.002 kg) (10,000 g × 2 g) (320 oz × 0.1 oz)	10 × 10 in	21 lb	\$1,405.00
65178[†]	30 lb × 0.01 lb (15 kg × 0.005 kg) (15,000 g × 5 g) (480 oz × 0.1 oz)	10 × 10 in	21 lb	\$1,405.00
65179[†]	30 lb × 0.01 lb (15 kg × 0.005 kg) (15,000 g × 5 g) (480 oz × 0.1 oz)	12 × 12 in	24 lb	\$1,495.00
65180[†]	50 lb × 0.01 lb (25 kg × 0.005 kg) (25,000 g × 5 g) (800 oz × 0.20 oz)	12 × 12 in	24 lb	\$1,495.00
65181[†]	100 lb × 0.02 lb (50 kg × 0.01 kg) (50,000 g × 10 g) (1,600 oz × 0.50 oz)	12 × 12 in	24 lb	\$1,495.00
IQ plus 2100SL with 12 in column - 115 VAC				
65182[†]	5 lb × 0.001 lb (2.5 kg × 0.0005 kg) (2,500 g × 0.5 g) (80 oz × 0.02 oz)	10 × 10 in	23 lb	\$1,405.00
65183[†]	10 lb × 0.002 lb (5 kg × 0.001 kg) (5,000 g × 1 g) (160 oz × 0.05 oz)	10 × 10 in	23 lb	\$1,405.00
65184[†]	20 lb × 0.005 lb (10 kg × 0.002 kg) (10,000 g × 2 g) (320 oz × 0.1 oz)	10 × 10 in	23 lb	\$1,405.00
65185[†]	30 lb × 0.01 lb (15 kg × 0.005 kg) (15,000 g × 5 g) (480 oz × 0.1 oz)	10 × 10 in	23 lb	\$1,405.00
65186[†]	30 lb × 0.01 lb (15 kg × 0.005 kg) (15,000 g × 5 g) (480 oz × 0.1 oz)	12 × 12 in	26 lb	\$1,495.00
65187[†]	50 lb × 0.01 lb (25 kg × 0.005 kg) (25,000 g × 5 g) (800 oz × 0.20 oz)	12 × 12 in	26 lb	\$1,495.00
65188[†]	100 lb × 0.02 lb (50 kg × 0.01 kg) (50,000 g × 10 g) (1,600 oz × 0.50 oz)	12 × 12 in	26 lb	\$1,495.00



NEMA 5-15 plug

CHECKWEIGHERS

CW-90

Over/Under Checkweigher



WeighVault
REVOLUTION
SCALE SOFTWARE

Approvals



Standard Features

- Membrane keypad consisting of ZERO, UNITS, PRINT, TARE, OVER, UNDER, ID, TARGET, 0-9, CLEAR, DECIMAL, ENTER, MENU, POWER
- 304 stainless steel, IP66 rated indicator
- PreVent™ breather vent
- Storage for up to 50 IDs
- Unit of measure: kg, gm, lb, oz, lb/oz (lb/oz is not Legal for Trade)
- High-intensity LED display
- Battery backed time and date
- Two full-duplex RS-232 serial ports
- Configurable print formats
- Audit trail tracking
- Optional communications: Ethernet, USB or fiber -optic
- Four configurable Digital I/O
- Reflash memory to upgrade firmware
- Auto-print capability
- Accumulator
- Factory calibrated

Scale

- Aluminum, environmentally sealed load cell
- 304 stainless steel
- Meets HACCP requirements
- Five-point overload protection

Specifications

Power AC:

Line Voltages:

115/230 VAC

Frequency:

50/60 Hz

Power Consumption:

1.5 A at 115 VAC (8 W)

0.75 A at 230 VAC (8 W)

Measurement Rate:

960,480, 240, 120, 60, 30, 15, 7.5 per second

System Linearity:

±0.01% full scale

Digital I/O:

Four channels on CPU board

Circuit Protection:

RFI, EMI, ESD protection

Display:

Large 0.8 in, 14 segment, six digit high-intensity red LED display

Scale Frame:

AISI304L, straight line finish, Ra=45 +/- 10

Scale Cover:

AISI304L, straight line finish, Ra=45 +/- 10

Annunciators:

Designators for %, kg, gm, lb, oz, center of zero, G/B, N, T, PT, neg, motion

Operating Temperature:

Legal: 14 °F to 104 °F (-10 °C to 40 °C)

Rating/Material:

IP66, stainless steel

Resolution:

Display: 100,000

Load Cell:

Aluminum, environmentally sealed

Warranty:

Two-year limited

Approvals:

Indicator:

NTEP CC 08-092, Class III/IIIL 10,000 d

Measurement Canada AM-5710, Class III 10,000 d

OIML R76/2006-GBI-10.02

TC11569

UL and CUL listed

CE marked

Scale:

NTEP CC 95-072, Class III 5,000 d

Measurement Canada AM-5082

NSF

Part Number/Price

Part #	Capacity	Platform Dimensions	Column Height	Est. Weight	Price
115 VAC					
105957[†]	5 lb × 0.001 lb (2.5 kg × 0.0005 kg) or (80 oz × 0.02 oz)	10 × 10 × 4.25 in	12 in	29 lb	\$1,555.00
105958[†]	10 lb × 0.002 lb (5 kg × 0.001 kg) or (160 oz × 0.05 oz)	10 × 10 × 4.25 in	12 in	29 lb	\$1,555.00
105959[†]	25 lb × 0.005 lb (10 kg × 0.002 kg) or (400 oz × 0.1 oz)	10 × 10 × 4.25 in	12 in	29 lb	\$1,555.00
105960[†]	25 lb × 0.005 lb (10 kg × 0.002 kg) or (400 oz × 0.1 oz)	12 × 12 × 4.25 in	12 in	33 lb	\$1,645.00
105961[†]	50 lb × 0.01 lb (25 kg × 0.005 kg) or (800 oz × 0.2 oz)	12 × 12 × 4.25 in	12 in	33 lb	\$1,645.00
105962[†]	100 lb × 0.02 lb (50 kg × 0.01 kg) or (1,600 oz × 0.5 oz)	12 × 12 × 4.25 in	12 in	33 lb	\$1,645.00
230 VAC					
118891[†]	2.5 kg × 0.0005 kg (5 lb × 0.001 lb) or (80 oz × 0.02 oz)	10 × 10 × 4.25 in	12 in	29 lb	\$1,555.00
118892[†]	5 kg × 0.001 kg (10 lb × 0.002 lb) or (160 oz × 0.05 oz)	10 × 10 × 4.25 in	12 in	29 lb	\$1,555.00
118893[†]	10 kg × 0.002 kg (25 lb × 0.005 lb) or (400 oz × 0.1 oz)	10 × 10 × 4.25 in	12 in	29 lb	\$1,555.00
118895[†]	10 kg × 0.002 kg (25 lb × 0.005 lb) or (400 oz × 0.1 oz)	12 × 12 × 4.25 in	12 in	33 lb	\$1,645.00
118896[†]	25 kg × 0.005 kg (50 lb × 0.01 lb) or (800 oz × 0.2 oz)	12 × 12 × 4.25 in	12 in	33 lb	\$1,645.00
118897[†]	50 kg × 0.01 kg (100 lb × 0.02 lb) or (1,600 oz × 0.5 oz)	12 × 12 × 4.25 in	12 in	33 lb	\$1,645.00
230 VAC CE marked/OIML approved					
106123^{††}	3 kg × 0.001 kg	254 × 254 × 108 mm	305 mm	13.2 kg	\$1,555.00
106124^{††}	6 kg × 0.002 kg	254 × 254 × 108 mm	305 mm	13.2 kg	\$1,555.00
106125^{††}	15 kg × 0.005 kg	254 × 254 × 108 mm	305 mm	13.2 kg	\$1,555.00
106126^{††}	15 kg × 0.005 kg	305 × 305 × 108 mm	305 mm	15 kg	\$1,645.00
106127^{††}	30 kg × 0.01 kg	305 × 305 × 108 mm	305 mm	15 kg	\$1,645.00
106128^{††}	60 kg × 0.02 kg	305 × 305 × 108 mm	305 mm	15 kg	\$1,645.00



[†] NEMA 5-15 plug





^{††} CEE 7/7 plug

Options/Accessories

Part #	Description	Price
200578	Ethernet TCP/IP and cable with attached cord grip	\$440.00
77142	Ethernet TCP/IP card	\$420.00
206272	Wireless LAN card RS232/Wi-Fi 802.11 a/b	\$570.00
95357	USB cable, Type A to mini-B, 1 m	\$11.00
171968	Firmware download cable	\$39.00
96736	Fiber-optic board	\$250.00
78026	Fiber-optic, duplex cable 100 ft	\$175.00
80892	Fiber-optic cutter	\$12.00
117358	WeighVault™ (requires part number 77142 or 206272)	\$265.00

Note: 1 in=25.4 mm

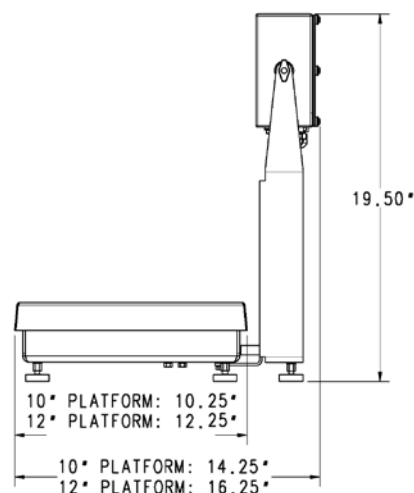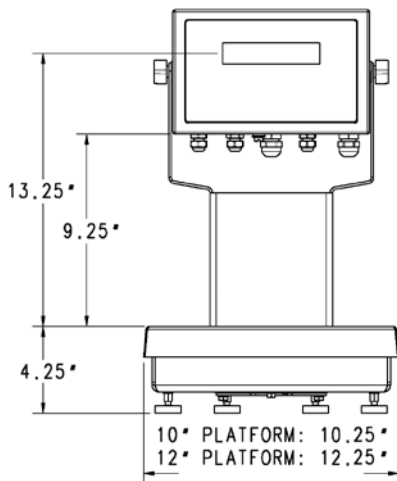

CW-90X

Over/Under Washdown Checkweigher



Approvals



Standard Features

- Piezo keypad consisting of ZERO, UNITS, PRINT, TARE, OVER, UNDER, ID, TARGET, ENTER, MENU, POWER
 - 304 stainless steel, IP69K rated indicator
 - PreVent™ breather vent
 - Storage for up to 50 IDs
 - Unit of measure: kg, gm, lb, oz, lb/oz (lb/oz is not Legal for Trade)
 - High-intensity LED display
 - Battery backed time and date
 - Two full-duplex RS-232 serial ports
 - Configurable print formats
 - Audit trail tracking
 - Optional communications: Ethernet, USB or Fiber-optic
 - Four configurable Digital I/O
 - Reflash memory to upgrade firmware
 - Auto print capability
 - Accumulator
 - Factory calibrated
- ### Scale Base
- IP69K, stainless steel, hermetically sealed load cell
 - 304 stainless steel
 - Meets HACCP requirements
 - Five point overload protection

Specifications

Power AC:

Line Voltages:

115/230 VAC

Frequency:

50/60 Hz

Power Consumption:

1.5 A at 115 VAC (8 W)

0.75 A at 230 VAC (8 W)

Measurement Rate:

960,480, 240, 120, 60, 30, 15, 7.5 per second

System Linearity:

±0.01% full scale

Digital I/O:

Four channels on CPU board

Circuit Protection:

RFI, EMI, ESD protection

Display:

Large 0.8 in, 14 segment, six digit high-intensity red LED display

Scale Frame:

AISI304L, straight line finish, Ra=45 +/- 10

Scale Cover:

AISI304L, straight line finish, Ra=45 +/- 10

Annunciators:

Designators for %, kg, gm, lb, oz, center of zero, G/B, N, T, PT, neg, motion

Operating Temperature:

Legal: 14 °F to 104 °F (-10 °C to 40 °C)

Rating/Material:

IP69K, stainless steel

Resolution:

Display: 100,000

Load Cell:

Stainless steel, hermetically sealed

Warranty:

Three-year limited

Approvals:

Indicator:

NTEP CC 08-092, Class III/IIIL 10,000 d

Measurement Canada AM-5710, Class III 10,000 d

OIML R76/2006-GBI-10.02

TC11569

cULus Listed

CE Marked

Scale:

NTEP CC 95-072, Class III 5,000 d

Measurement Canada AM-5082

NSF

Part Number/Price

Part #	Capacity	Platform Dimensions	Column Height	Est. Weight	Price
115 VAC					
105963[†]	5 lb × 0.001 lb (2.5 kg × 0.0005 kg) or (80 oz × 0.02 oz)	10 × 10 × 4.25 in	12 in	29 lb	\$2,167.00
105965[†]	10 lb × 0.002 lb (5 kg × 0.001 kg) or (160 oz × 0.05 oz)	10 × 10 × 4.25 in	12 in	29 lb	\$2,167.00
105966[†]	25 lb × 0.005 lb (10 kg × 0.002 kg) or (400 oz × 0.1 oz)	10 × 10 × 4.25 in	12 in	29 lb	\$2,167.00
105967[†]	25 lb × 0.005 lb (10 kg × 0.002 kg) or (400 oz × 0.1 oz)	12 × 12 × 4.25 in	12 in	33 lb	\$2,257.00
105968[†]	50 lb × 0.01 lb (25 kg × 0.005 kg) or (800 oz × 0.2 oz)	12 × 12 × 4.25 in	12 in	33 lb	\$2,257.00
105969[†]	100 lb × 0.02 lb (50 kg × 0.01 kg) or (1,600 oz × 0.5 oz)	12 × 12 × 4.25 in	12 in	33 lb	\$2,257.00
230 VAC					
118899[†]	2.5 kg × 0.0005 kg (5 lb × 0.001 lb) or (80 oz × 0.02 oz)	10 × 10 × 4.25 in	12 in	29 lb	\$2,167.00
118900[†]	5 kg × 0.001 kg (10 lb × 0.002 lb) or (160 oz × 0.05 oz)	10 × 10 × 4.25 in	12 in	29 lb	\$2,167.00
118901[†]	10 kg × 0.002 kg (25 lb × 0.005 lb) or (400 oz × 0.1 oz)	10 × 10 × 4.25 in	12 in	29 lb	\$2,167.00
118902[†]	10 kg × 0.002 kg (25 lb × 0.005 lb) or (400 oz × 0.1 oz)	12 × 12 × 4.25 in	12 in	33 lb	\$2,257.00
118903[†]	25 kg × 0.005 kg (50 lb × 0.01 lb) or (800 oz × 0.2 oz)	12 × 12 × 4.25 in	12 in	33 lb	\$2,257.00
118904[†]	50 kg × 0.01 kg (100 lb × 0.02 lb) or (1,600 oz × 0.5 oz)	12 × 12 × 4.25 in	12 in	33 lb	\$2,257.00
230 VAC CE marked/OIML approved					
106129^{††}	3 kg × 0.001 kg	254 × 254 × 108 mm	305 mm	13.2 kg	\$2,167.00
106130^{††}	6 kg × 0.002 kg	254 × 254 × 108 mm	305 mm	13.2 kg	\$2,167.00
106131^{††}	15 kg × 0.005 kg	254 × 254 × 108 mm	305 mm	13.2 kg	\$2,167.00
106132^{††}	15 kg × 0.005 kg	305 × 305 × 108 mm	305 mm	15 kg	\$2,257.00
106133^{††}	30 kg × 0.01 kg	305 × 305 × 108 mm	305 mm	15 kg	\$2,257.00
106134^{††}	60 kg × 0.02 kg	305 × 305 × 108 mm	305 mm	15 kg	\$2,257.00



NEMA 5-15 plug





CEE 7/7 plug

Options/Accessories

Part #	Description	Price
200578	Ethernet TCP/IP and cable with attached cord grip	\$440.00
77142	Ethernet TCP/IP card	\$420.00
206272	Wireless LAN card RS232/Wi-Fi 802.11 a/b	\$570.00
95357	USB cable, Type A to mini-B, 1 m	\$11.00
171968	Firmware download cable	\$39.00
96736	Fiber-optic board	\$250.00
78026	Fiber-optic, duplex cable 100 ft	\$175.00
80892	Fiber-optic cutter	\$12.00
117358	WeighVault [®] (requires part number 77142 or 206272)	\$265.00

Note: 1 in=25.4 mm

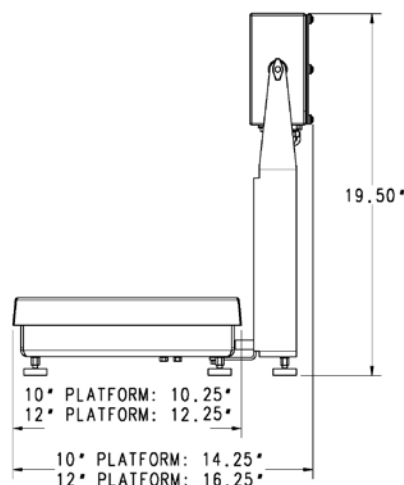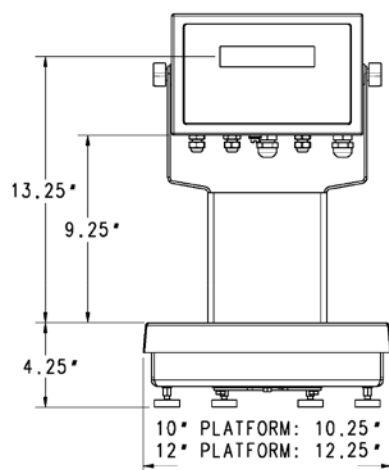

This image shows a full page of blank graph paper. The grid consists of small, uniform squares formed by thin, light gray lines. There are no margins, text, or other markings on the page.