

# Rice Lake OS-10/OS-25/OS-45

Suspended Scale

COMPANION  
ANIMAL SCALES



## Standard Features

- Hold function
- Units of measure: lb/lb-oz/kg
- Adjustable automatic shut-off
- Ergonomic handheld design
- Battery operated, two AA batteries (included)
- Carrying case and top s-hook (included)
- Captured lower hook, removable upper hook (both hooks included)

## Specifications

### Capacity:

#### OS-10:

- 22 lb × 0.02 lb
- 22 lb × 0.25 oz
- 10 kg × 0.01 kg

#### OS-25:

- 55 lb × 0.05 lb
- 55 lb × 0.5 oz
- 25 kg × 0.02 kg

#### OS-45:

- 99 lb × 0.1 lb
- 99 lb × 1 oz
- 45 kg × 0.05 kg

### Power:

Two AA batteries (included)

### Temperature:

Operating:  
32 °F to 104 °F (0 °C to 40 °C)

### Warranty:

One-year limited

### Approvals:

CE Approved

Approvals




## Part Number/Price

Part #	Model	Capacity	Est. Weight	Price
130292	OS-10	10 × 0.01 kg (22 × 0.02 lb) (22 lb × 1/4 oz)	1.25 lb	\$125.00
130293	OS-25	25 × 0.02 kg (55 × 0.05 lb) (55 lb × 1/2 oz)	1.25 lb	\$125.00
130294	OS-45	45 × 0.05 kg (99 × 0.1 lb) (99 lb × 1 oz)	1.25 lb	\$125.00

## Dimensions

	Inches	Centimeters
A	14.30	36.3
B	3.60	9.1
C	1.30	3.3
D	11.60	29.5

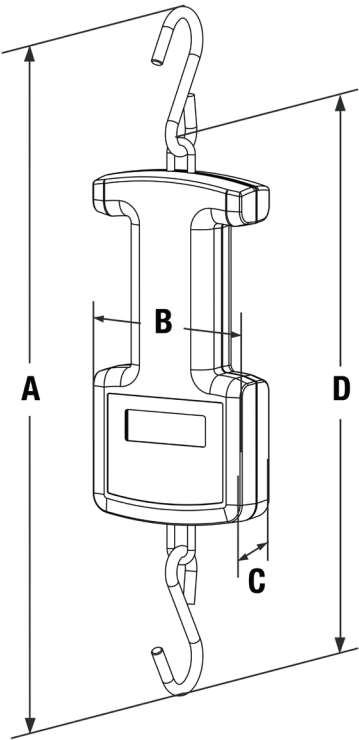



## Standard Features

- Large 1-inch LCD display
- Unit of measure locking
- Recall function to view last weight
- Automatic shut-off for long battery life
- Built-in measuring tape

## Specifications

**Capacity:**  
44 lb × 0.5 oz (20 kg × 10 g)

**Power:**  
Four AA alkaline batteries (included)  
or AC adapter (included)

**Battery Type**  
Four AA alkaline (included)

**Measuring Tape:**  
0 to 22.5 in (0 to 57 cm)

**Approvals:**  
AC adapter: cULus

**Warranty:**  
Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
204394	Rice Lake VS-10	44 lb × 0.5 oz (20 kg × 10 g), includes 120 VAC adapter	\$225.00

## Shipping Weight



Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204394	Rice Lake VS-10	27	18	7	10	21	21

## Options/Accessories

Part #	Description	Price
112570	Carrying Case	\$56.00

## Dimensions

	Inches	Centimeters
A	3.90	9.9
B	15.00	38.1
C	3.10	7.8
D	23.60	59.9
E	11.00	27.9

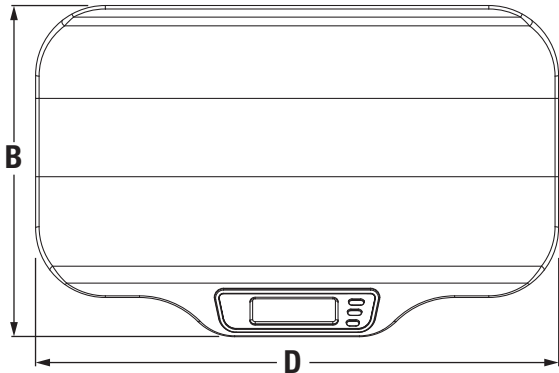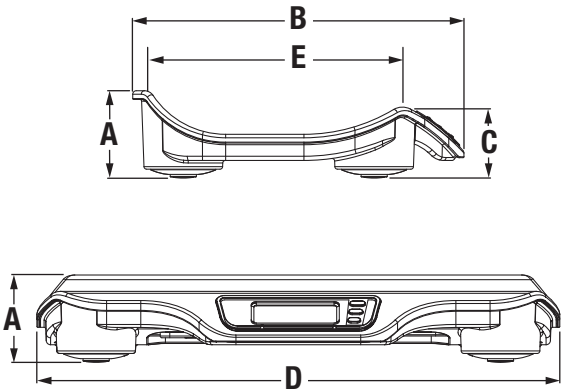

# Rice Lake VS-11



## Standard Features

- Large 1-inch LCD display
- Dual-range capacity for increased precision
- Accuracy within 5 g
- Unit of measure locking
- Recall function to view last weight
- Automatic shut-off for long battery life
- Built-in measuring tape

## Specifications

### Capacity:

Range 1: 0 to 22 lb × 0.2 oz  
(0 to 10 kg × 5 g)  
Range 2: 22 to 44 lb × 0.5 oz  
(10 to 20 kg × 10 g)

### Power:

Four AA alkaline batteries (included)  
or AC adapter (included)

### Battery Type:

Four AA alkaline (included)

### Measuring Tape:

0 to 22.5 in (0 to 57 cm)

### Approvals:

AC adapter: cULus

### Warranty:

Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
204395	Rice Lake VS-11	0 to 22 lb × 0.2 oz, 22 to 44 lb × 0.5 oz (0 to 10 kg × 5 g, 10 to 20 kg × 10 g) includes 120 VAC adapter	\$265.00

## Shipping Weight


Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204395	Rice Lake VS-11	27	18	7	10	21	21

## Options/Accessories

Part #	Description	Price
112570	Carrying Case	\$56.00

## Dimensions

	Inches	Centimeters
A	3.90	9.9
B	15.00	38.1
C	3.10	7.8
D	23.60	59.9
E	11.00	27.9

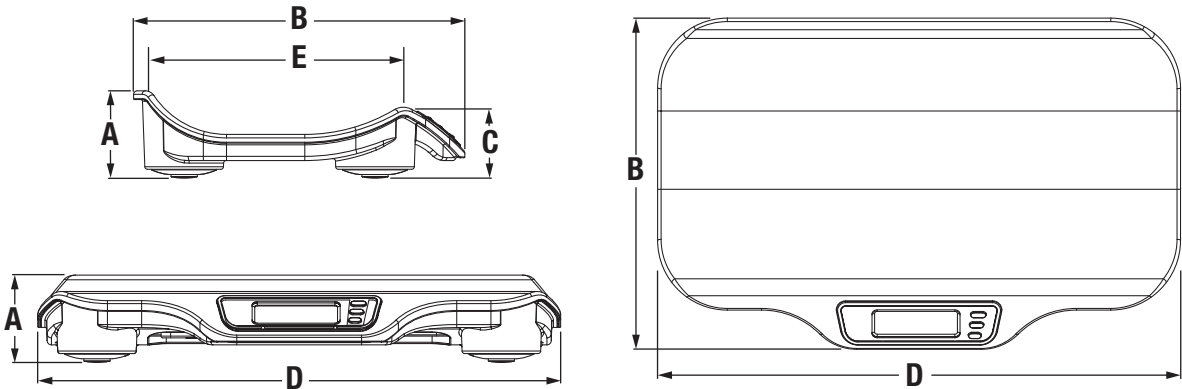



## Approvals



## Part Number/Price

Part #	Model #	Capacity	Price
204398	Rice Lake VS-12	0 to 10 lb × 0.05 oz, 10 to 33 lb × 0.1 oz (0 to 5 kg × 1 g, 5 to 15 kg × 2 g) 120V/230V	\$765.00

## Shipping Weight


Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204398	Rice Lake VS-12	18	28	11	25	40	40

## Options/Accessories

Part #	Description	Price
165138	AC adapter, input voltage 100 to 240 V, c-Met	\$55.00

## Dimensions

	Inches	Centimeters
A	23.94	60.8
B	16.95	43.1
C	6.29	16.0
D	10.50	26.7
E	3.11	7.9
F	13.34	33.9

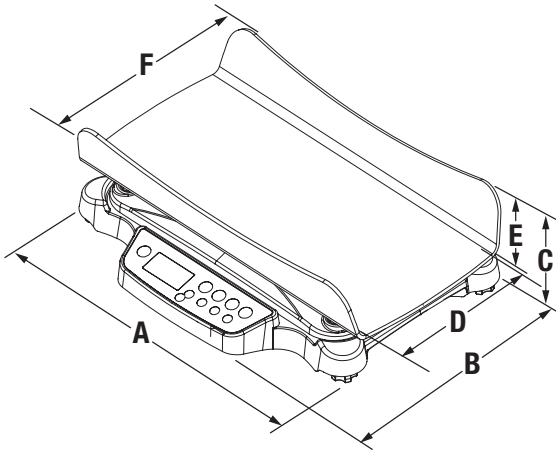

## Standard Features

- LCD display
- Dual-range capacity for increased precision
- Unit of measure locking
- Automatic shut-off for long battery life
- Motiontrap™ movement compensation technology
- Built-in measuring tape

## Specifications

### Capacity:

Range 1: 0 to 10 lb × 0.05 oz  
(0 to 5 kg × 1 g)  
Range 2: 10 to 33 lb × 0.1 oz  
(5 to 15 kg × 2 g)

### Power:

12 VDC, provided by six AA lithium batteries (included) or AC adapter (optional)

### Battery Type:

Six Li-FeS2 batteries

### Temperature:

Operating:  
50 °F to 95 °F (14 °C to 35 °C)

### Display:

Five-digit LCD display, 0.75 in (1.9 cm) digit height

### Approvals:

c-Met E113986

### Warranty:

Two-year limited

# Rice Lake VS-20



COMPANION  
ANIMAL SCALES

## Standard Features

- Push-button LCD display
- Large, stable scale base
- Nonslip rubber mat, removable for cleaning
- Antimicrobial keypad
- Unit of measure toggle or locking
- Motiontrap™ movement compensation technology
- USB communication
- Hold function
- Tare function
- Factory calibrated

## Specifications

### Capacity:

550 × 0.2 lb (250 × 0.1 kg)

### Platform Dimensions:

(L × W × H)

14.70 × 14.70 × 3.00 in

### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

### Battery Type:

Six AA alkaline (included)

### Battery Use:

25 hours continuous use with batteries  
Automatic power-off can be configured

### Temperature:

Operating:

50 °F to 104 °F (10 °C to 40 °C)

### Display:

Five-digit LCD display, 0.75 in (1.9 cm) digit height

### Warranty:

Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
Consult	Rice Lake VS-20	550 × 0.2 lb (250 kg × 0.1 kg) with USB	\$2,125.00

## Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
Consult	Rice Lake VS-20	13	22	15	25	37	37

## Options/Accessories


Part #	Description	Price
133077 †	9 VDC adapter, 100 to 240 VAC, 50/60 Hz auto-switching	\$30.00



† NEMA 1-15 Plug

## Dimensions

	Inches	Centimeters
A	12.70	32.3
B	22.40	56.9
C	14.70	37.4
D	3.00	7.6

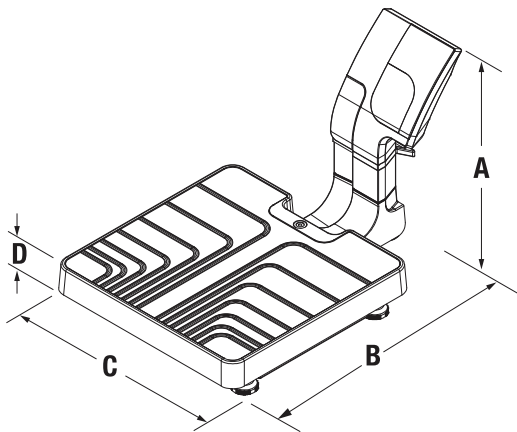



## Standard Features

- Large LCD display
- Antimicrobial keypad
- Two wheels for portability
- Metal nonslip platform
- Dual ramp
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- Serial and USB data communication port
- Tare function
- Hold function
- Factory calibrated
- Easy to store, folded depth is 11.75 in (29.8 cm)

## Specifications

### Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

### Platform Dimensions:

(L × W × H)

29.50 × 31.50 × 3.15 in

### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

### Battery Type:

Six AA alkaline (included)

### Battery Use:

25 hours continuous use with batteries  
Automatic power-off can be configured

### Display:

Five-digit LCD display, 0.75 in (1.9 cm) digit height

### Temperature:

Operating:  
50 °F to 104 °F (14 °C to 40 °C)

### Warranty:

Two-year limited

## Part Number/Price


Part #	Model #	Capacity	Price
204403	Rice Lake VS-36	1,000 × 0.2 lb (450 × 0.1 kg)	\$3,115.00

## Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204403	Rice Lake VS-36	51	42	14	102	216	216

## Options/Accessories


Part #	Description	Price
133077 †	9 VDC adapter, 100 to 240 VAC, 50/60 Hz auto-switching	\$30.00



† NEMA 1-15 Plug

## Dimensions

	Inches	Centimeters
A	3.15	8.0
B	47.70	121.2
C	37.80	96.0
D	45.30	115.1
E	31.50	80.0
F	29.50	74.9
G	2.40	6.1
H	27.20	69.1

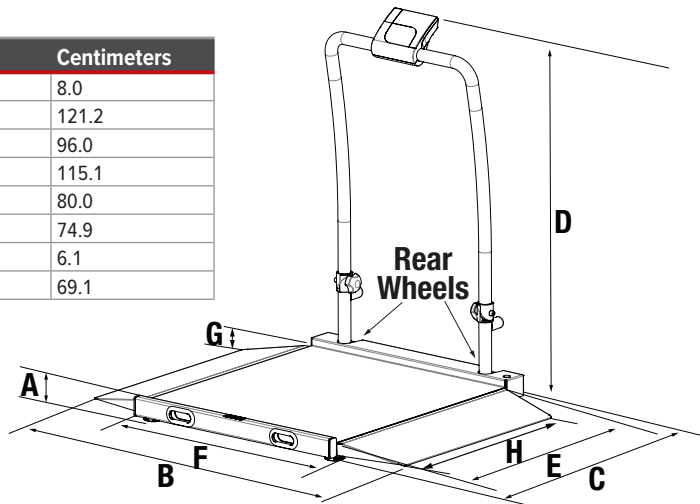

Rice Lake VS-36 in folded position



# Rice Lake VS-34

## COMPANION ANIMAL SCALES



### Standard Features

- Large LCD display
- Antimicrobial keypad
- Two wheels for portability
- Single ramp
- Plastic polymer nonslip platform
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- Serial and USB communication ports
- Tare function
- Hold function
- Factory calibrated
- Easy to store, folded depth is 11.75 in (29.8 cm)

### Specifications

#### Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

#### Platform Dimensions Without Ramps:

(L × W × H)

29.50 × 32.00 × 2.40 in

#### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

#### Battery Type:

Six AA alkaline (included)

#### Battery Use:

25 hours continuous use with batteries  
Automatic power-off can be configured

#### Display:

Five-digit LCD display, 0.75 in (1.9 cm) digit height

#### Temperature:

Operating:  
50 °F to 104 °F (14 °C to 40 °C)

#### Warranty:

Two-year limited

### Part Number/Price

Part #	Model #	Capacity	Price
204405	Rice Lake VS-34	1,000 × 0.2 lb (450 kg × 0.1 kg) with USB	\$2,125.00

### Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204405	Rice Lake VS-34	42	41	14	90	174	174

### Options/Accessories


Part #	Description	Price
220767	Heavy-duty mat	\$70.00
133077 †	9 VDC adapter, 100 to 240 VAC, 50/60 Hz auto-switching	\$30.00



† NEMA 1-15 Plug

### Dimensions

	Inches	Centimeters
A	29.50	74.9
B	32.00	81.3
C	2.40	6.1
D	9.30	23.6
E	37.50	95.3
F	45.00	114.3

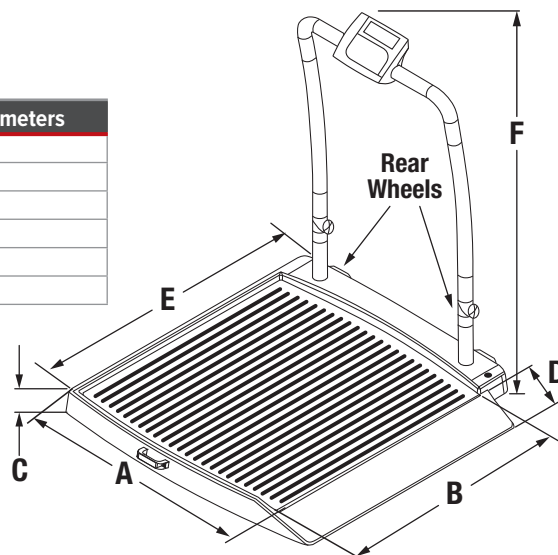

Rice Lake VS-34  
in folded position



Optional heavy-duty mat



## Standard Features

- Large LCD display
- Antimicrobial keypad
- Two wheels for easy transport
- Single ramp
- Plastic polymer nonslip platform
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- Serial and USB data communication port
- Tare function
- Hold function
- Factory calibrated

## Specifications

### Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

### Platform Dimensions Without Ramps:

(L × W × H)  
29.50 × 32.00 × 2.40 in

### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

### Battery Type:

Six AA alkaline (included)

### Battery Use:

25 hours continuous use with batteries  
Automatic power-off can be configured

### Temperature:

Operating:  
50 °F to 104 °F (14 °C to 40 °C)

### Cable Length:

7 ft (2.1 m) cable between scale base and indicator

### Display:

Five-digit LCD display, 0.75 in (1.9 cm) digit height

### Warranty:

Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
204396	Rice Lake VS-30	1,000 × 0.2 lb (450 × 0.1 kg) with USB	\$2,280.00

## Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204396	Rice Lake VS-30	45	44	7	78	100	100

## Options/Accessories


Part #	Description	Price
220767	Heavy-duty mat	\$70.00
133077 †	9 VDC adapter, 100 to 240 VAC, 50/60 Hz auto-switching	\$30.00



† NEMA 1-15 Plug

## Dimensions

	Inches	Centimeters
A	29.50	74.9
B	32.00	81.3
C	2.40	6.1
D	9.30	23.6
E	37.50	95.3

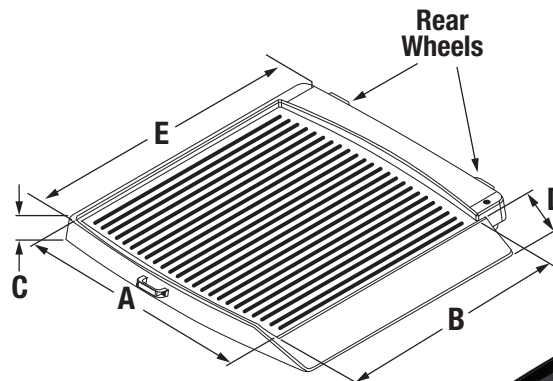

Optional heavy-duty mat



# Rice Lake VS-35

## COMPANION ANIMAL SCALES



### Standard Features

- Large LCD display
- Antimicrobial keypad
- Two wheels for easy transport
- Dual ramp
- Plastic polymer nonslip platform
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- Serial and USB communication port
- Tare function
- Hold function
- Factory calibrated
- Easy to store, folded depth is 11.75 in (29.8 cm)

### Specifications

#### Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

#### Platform Dimensions Without Ramps:

(L × W × H)

29.50 × 32.00 × 2.40 in

#### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

#### Battery Type:

Six AA alkaline (included)

#### Battery Use:

25 hours continuous use with batteries  
Automatic power-off can be configured

#### Display:

Five-digit LCD display, 0.75 in (1.9 cm) digit height

#### Temperature:

Operating:  
50 °F to 104 °F (14 °C to 40 °C)

#### Warranty:

Two-year limited

### Part Number/Price


Part #	Model #	Capacity	Price
204404	Rice Lake VS-35	1,000 lb × 0.2 lb (450 kg × 0.1 kg) with USB	\$2,820.00

### Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204404	Rice Lake VS-35	51	42	14	102	216	216

### Options/Accessories


Part #	Description	Price
220767	Heavy-duty mat	\$70.00
133077 †	9 VDC adapter, 100 to 240 VAC, 50/60 Hz auto-switching	\$30.00



† NEMA 1-15 Plug

### Dimensions

	Inches	Centimeters
A	48.50	123.2
B	32.00	81.3
C	2.40	6.1
D	9.30	23.6
E	38.00	96.5
F	45.00	114.3
G	29.50	74.9

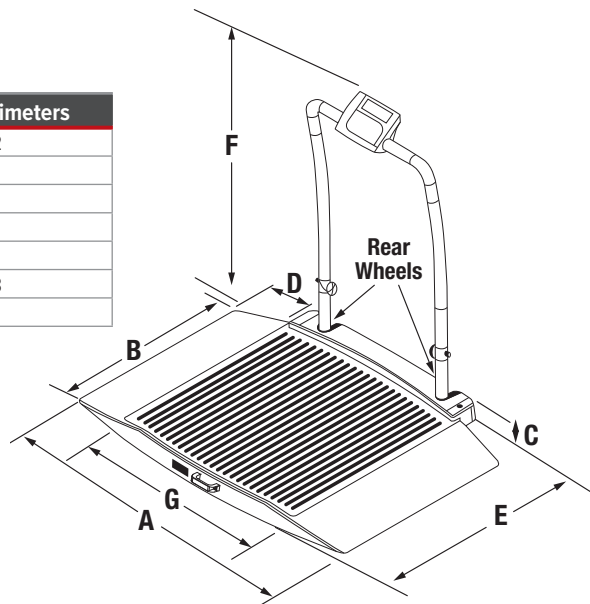

350-10-3 in folded position



Optional heavy-duty mat



## Standard Features

- Large LCD display
- Large 1-inch LCD display
- Two wheels for easy transport
- Plastic polymer nonslip platform
- Dual ramp
- Motiontrap™ movement compensation technology
- Unit of measure toggle or locking
- Serial and USB communication port
- Tare function
- Hold function
- Factory calibrated

## Specifications

### Capacity:

1,000 × 0.2 lb (450 × 0.1 kg)

### Platform Dimensions Without Ramps:

(L × W × H)  
29.50 × 32.00 × 2.40 in

### Power:

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

### Battery Type:

Six AA alkaline (included)

### Battery Use:

25 hours continuous use with batteries  
Automatic power-off can be configured

### Temperature:

Operating:  
50 °F to 104 °F (14 °C to 40 °C)

### Cable Length:

7 ft (2.1 m) cable between scale base and indicator

### Display:

Five-digit LCD display, 0.75 in (1.9 cm) digit height

### Warranty:

Two-year limited

## Part Number/Price

Part #	Model #	Capacity	Price
204397	Rice Lake VS-31	1,000 × 0.2 lb (450 × 0.1 kg) with USB	\$2,770.00

## Shipping Weight

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204397	Rice Lake VS-31	53	45	7	86	121	121

## Options/Accessories


Part #	Description	Price
220767	Heavy-duty mat	\$70.00
133077 †	9 VDC adapter, 100 to 240 VAC, 50/60 Hz auto-switching	\$30.00



† NEMA 1-15 Plug

## Dimensions

	Inches	Centimeters
A	48.50	123.2
B	32.00	81.3
C	2.40	6.1
D	9.30	23.6
E	38.00	96.5
F	29.50	74.9

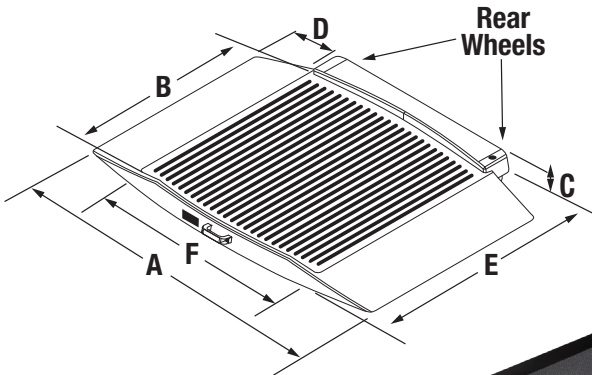

Optional heavy-duty mat