



Picture is a representation of actual product.

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
25 lb	226878	2 lb	Consult
50 lb	226879	2 lb	Consult
100 lb	226880	2 lb	Consult
150 lb	226881	2 lb	Consult
250 lb	226882	2 lb	Consult
500 lb	226883	2 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F	G	H	I	J
lb/in										
25 to 500	2.81	1.26	0.62	0.26	0.25	0.50	1.81	0.90	1.00	0.50

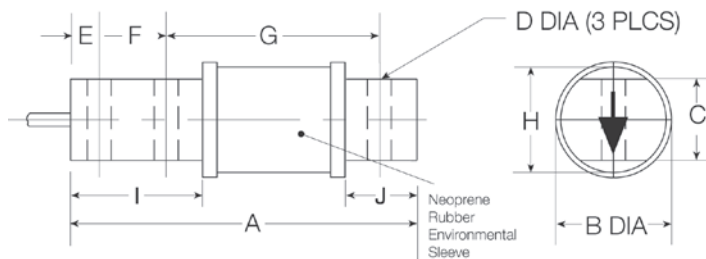

Interchangeable Products

- RICE LAKE WEIGHING SYSTEMS
RL50210.....page 120
- RICE LAKE WEIGHING SYSTEMS
RL50219SS.....page 118
- VPG® SENSORTRONICS®
60040.....page 286
- ARTECH®
50210
- VPG® REVERE
5503

Weigh Module Available

- RICE LAKE WEIGHING SYSTEMS
RL50210TA.....page 37

Specifications

- Full Scale Output:**
3.0 mV/V
- Output Resistance:**
300 ohm
- Input Resistance:**
360 to 450 ohm
- Material/Finish:**
Alloy steel, nickel plated
- Temperature:**
Operating:
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Environmentally sealed, IP65
- Safe Overload:**
150% full scale
- Rated Excitation:**
5 to 10 VDC (15 V maximum)
- Nonlinearity:**
0.03% full scale
- Hysteresis:**
0.02% full scale
- Insulation Resistance:**
5,000 megohm
- Deflection at Capacity:**
25 to 50 lb: 0.008 in
100 lb: 0.010 in
150 lb: 0.012 in
250 lb: 0.016 in
500 lb: 0.025 in
- Cable Length:**
20 ft
- Cable Diameter:**
0.200 in
Polyurethane jacket
- Cable Color Code:**
Red +Excitation
Black -Excitation
Green +Signal
White -Signal
- Warranty:**
Two-year limited
- Approvals:**
cFMus

RICE LAKE
LOAD CELLS