

# Part Number/Price

Part #	Model #	Capacity	Price
204405	Rice Lake VS-34	1,000 × 0.2 lb (450 kg × 0.1 kg) with USB	Consult


# **Shipping Weight**

Part #	Model #	L (in)	W (in)	H (in)	Package Wgt. (lb)	Dim Wgt. (lb)	Shipping Wgt. (lb)
204405	Rice Lake VS-34		41	14	90	174	174

# **Options/Accessories**

Part #	Description	Price
220767	Heavy-duty mat	Consult
133077 <sup>†</sup>	9 VDC adapter, 100 to 240 VAC, 50/60 Hz auto-switching	Consult



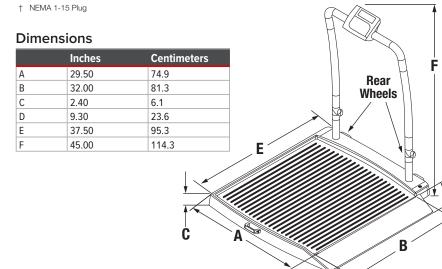

# **Standard Features**

- Large LCD display
- · Antimicrobial keypad
- Two wheels for portability
- Single ramp
- Plastic polymer nonslip platform
- Motiontrap™ movement compensation technology
- · Unit of measure toggle or locking
- Serial and USB communication ports
- · Tare function
- · Hold function
- · Factory calibrated
- Easy to store, folded depth is 11.75 in (29.8 cm)

## **Specifications**

# Capacity:

 $1,000 \times 0.2$  lb (450 × 0.1 kg)

# **Platform Dimensions Without Ramps:**

(L × W × H) 29.50 × 32.00 × 2.40 in

9 VDC, provided by six AA alkaline batteries (included) or AC adapter (optional)

### **Battery Type:**

Six AA alkaline (included)

### **Battery Use:**

25 hours continuous use with batteries Automatic power-off can be configured

Five-digit LCD display, 0.75 in (1.9 cm) digit height

# Temperature:

Operating: 50 °F to 104 °F (14 °C to 40 °C)

# Warranty:

Two-year limited





Optional heavy-duty mat