

Limited Stock
Available



Ishida Uni-7

Price Computing Printing Scales

FEATURES

- Simple, durable and robust design
- Removable front-load cassette, with up to seven cassette configurations
- Prints safe handling instructions, country of origin, 2020 nutrition, custom text messages, custom images and more
- Batch printing
- Graphic-based QR code printing
- Customizable color touchscreen with adjustable viewing angle and tactile keypad
- Programmable tactile preset keys
- Flash ROM for simple update of application software
- Self-service mode
- Cash register interface
- Fully compliant with RoHS regulations for a completely lead-free machine
- Optional Wi-Fi kit (factory installation recommended)
- Compatible with third-party software, including Upshop 360°, ADC's InterScale®, Invafresh's ePlum®, Toast®, Square® and Droste®



Self-serve large button



Customer-facing color graphics



Fish Platter
PN 46917



Label cassette



SPECIFICATIONS

Power:
100 to 240 VAC, 50/60 Hz

Power Consumption:
In operation: 100 W
Stand-by: 50 W

Resolution:
3,000 display divisions maximum

Communications:
LAN
Wi-Fi 802.11 a/b/g/n/ac
2.4 GHz/5 GHz
Security: WEP/WPA/WPA2

Input/Output:
LAN
USB-A (service, transaction data)
Two RJ11
SD card (expanded storage, 8GB max)

Operating System:
VxWorks

Memory Capacity:
Flash ROM 4 MB expandable to 2 GB

Preset Keys:
99 programmable pages, 20 PLUs each
60 programmable tactile preset keys
24 tactile function keys

Display:
Operator: touchscreen, color 7-in LCD
Customer: color LCD, 7 in (480 × 234 px)
Unit price: six digits
Tare: four digits
Weight: five digits
Total price: eight digits

Printer:
Printhead: 2.2 in (56 mm)
direct thermal, effective 2.2 in (56 mm)
Resolution: 200 dpi (8 dot/mm)
Speed: 4.7 in/sec (120 mm/sec) max
Min. weight: 0.015 lb (0.006 kg)
Formats: customizable, up to 999
Barcodes: UPC, JAN, EAN, EAN128, CODE128, ITF, GS1, Custom

Label Size:
Type: Die-cut, continuous
Width: 1.2 to 2.5 in (30 to 64 mm)
Length: 0.8 to 7.9 in (20 to 200 mm)

Label Roll:
I.D.: 1.6-in (40 mm) min
O.D.: 3.9-in (100 mm) max
Backing width: 2.6-in (66 mm) max

Platter:
15.7 × 10.8 in (399 × 274 mm)

Weight:
Bench/pole: approx. 30 lb (13.6 kg)
Hanging: approx. 42 lb (19.1 kg)

Temperature:
Operating: 32 °F to 104 °F
(0 °C to 40 °C)

Humidity:
20 to 85% RH
(without condensation)

Warranty:
One-year limited

Approvals:
NTEP 07-099
cULus Listed



PART NUMBER/PRICE

| PART # | MODEL/DESCRIPTION | WIRELESS | SINGLE-RANGE CAPACITY | DUAL-RANGE CAPACITY | EST. SHIP WEIGHT | PRICE |
|--------|-------------------|----------|-----------------------|---|------------------|---------|
| 161937 | Uni-7 Bench | | 0 to 30 × 0.01 lb | 0 to 15 × 0.005 lb / 15 to 30 × 0.01 lb | 31 lb | Consult |
| 109366 | Uni-7 Bench | ✓ | 0 to 30 × 0.01 lb | 0 to 15 × 0.005 lb / 15 to 30 × 0.01 lb | 31 lb | Consult |
| 155266 | Uni-7 Bench | ✓ | 0 to 60 × 0.02 lb | - | 31 lb | Consult |
| 109367 | Uni-7 Pole | ✓ | 0 to 30 × 0.01 lb | 0 to 15 × 0.005 lb / 15 to 30 × 0.01 lb | 34 lb | Consult |
| 109371 | Uni-7H Hanging | ✓ | 0 to 30 × 0.01 lb | 0 to 15 × 0.005 lb / 15 to 30 × 0.01 lb | 42 lb | Consult |

Ishida Uni-7

Price Computing Printing Scales

OPTIONS/ACCESSORIES

| PART # | DESCRIPTION | PRICE |
|--------|---|---------|
| 167774 | In-use cover, operator keyboard | Consult |
| 110996 | Additional label cassette | Consult |
| 190565 | Additional label cassette for Uni-7H | Consult |
| 153320 | Linerless label cassette | Consult |
| 46916 | Produce platter (L × W × D) 11.5 × 17 × 0.7 in | Consult |
| 46917 | Fish platter (L × W × D) 11.5 × 17 × 0.7 in | Consult |
| 120812 | Cash drawer-black power coat with Uni-7 plug | Consult |
| 91870 | Compact flash card for expanded memory, 32MB, for CPU board version PK-260A | Consult |
| 174110 | SD memory card, 2 GB, for CPU board version PK-260B | Consult |
| 160906 | USB flash memory, 1 GB | Consult |

COMMUNICATION

| PART # | DESCRIPTION | PRICE |
|---------|---|---------|
| 152628* | ScaleLink Pro 5 license file, one license required per computer | Consult |
| 78860 | Cross cable, Ethernet CAT5, 6 ft | Consult |
| 215289 | Internal wireless communication 802.11a/b/g/n/ac 2.4 GHz/5 GHz (factory installation recommended) | Consult |

*Software key is provided after purchase and online registration is completed at www.ricelake.com/ishida-software-form
 NOTE: Manuals and software programs can be downloaded from the distributor section of www.ricelake.com/retail

LABEL STOCK




DESCRIPTION

Please refer to labels section of this catalog for ordering information and case quantity pricing

DIMENSIONS


Uni-7 Bench

| | | | | | |
|---|------------------|---|------------------|---|------------------|
| A | 16.4 in (417 mm) | D | 15.7 in (398 mm) | G | 6.8 in (173 mm) |
| B | 18.3 in (464 mm) | E | 5.3 in (134 mm) | H | 10.8 in (275 mm) |
| C | 11.7 in (296 mm) | F | 6.2 in (157 mm) | I | 11.8 in (298 mm) |

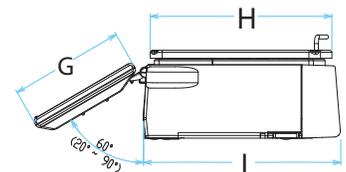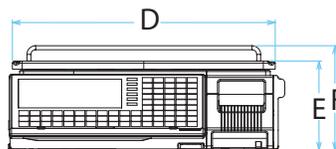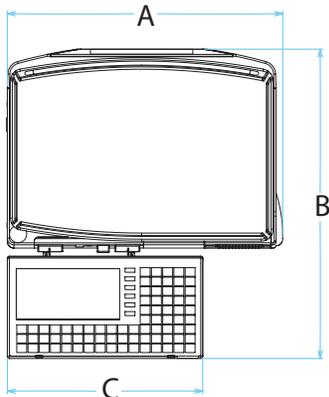

DIMENSIONS


| Uni-7 Pole | | | | | |
|------------|------------------|---|-----------------|---|------------------|
| A | 16.4 in (417 mm) | E | 5.3 in (134 mm) | H | 10.8 in (275 mm) |
| C | 11.7 in (296 mm) | F | 6.2 in (157 mm) | K | 7.5 in (190 mm) |
| D | 15.7 in (398 mm) | G | 6.8 in (173 mm) | M | 5.1 in (130 mm) |
| | | | | N | 13.0 in (331 mm) |
| | | | | O | 18.4 in (468 mm) |
| | | | | P | 22.0 in (558 mm) |

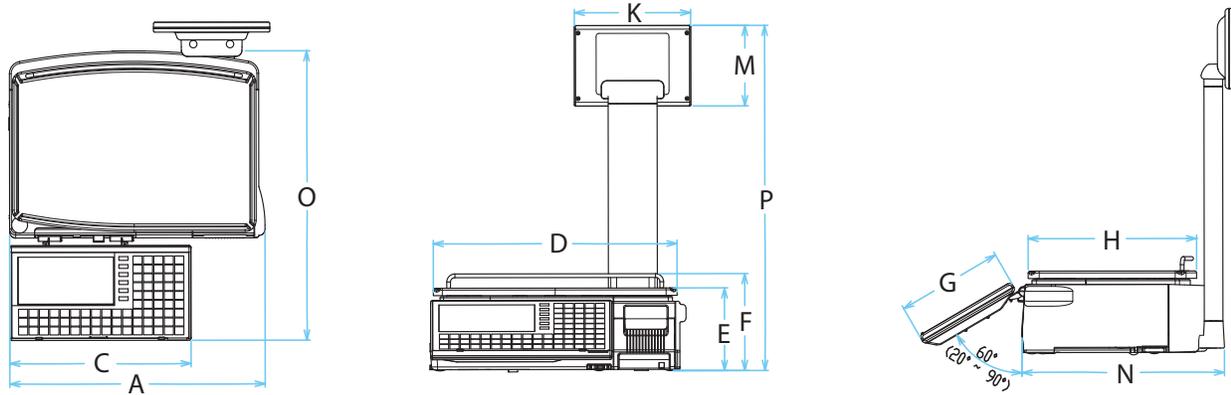

DIMENSIONS

| Uni-7H Hanging | | | | | |
|----------------|-------------------|---|-------------------|---|-------------------|
| A | 10.66 in (271 mm) | D | 17.20 in (437 mm) | G | 5.51 in (140 mm) |
| B | 16.92 in (430 mm) | E | 6.81 in (173 mm) | H | 22.20 in (564 mm) |
| C | 18.38 in (467 mm) | F | 2.75 in (70 mm) | I | 14.17 in (360 mm) |

Mounting Specifications
 Pipe: 1.10 in outside diameter

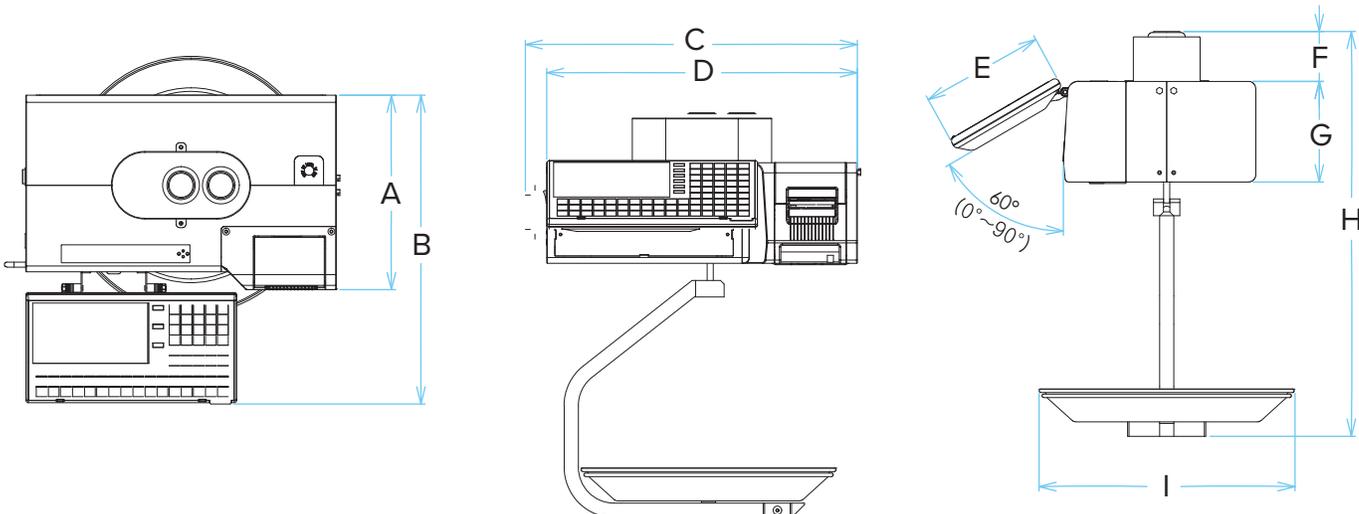

MULTI-PURPOSE
 RETAIL SCALES
 PRICE COMPUTING
 SCALES
 PRICE COMPUTING
 PRINTING SCALES
 LABELERS
 WRAPPING
 SYSTEMS
 SOFTWARE
 ACCESSORIES
 POWER
 CONDITIONING
 RETAIL
 LABELS
 WARRANTY