

Specifications

Capacity (Dual Range):

0 to 15×0.005 lb, 15 to 30×0.01 lb

Print Speed:

3.9/ 4.7/ 5.9 in/sec (100/ 120/ 150 mm/sec)

Label Size:

Width: 1.2 to 3.1 in (30 to 80 mm) Length: 0.8 to 7.9 in (20 to 200 mm)

Display:

Operator side: 12 in (800 × 600) color touch panel Uni-9DB: 8.4 in Customer side: 7 in (800 × 480) or 12 in (800 × 600) for bench, 12 in for other models Type: Five-wire resistive

Display Items:

Tare: Four-digits
Unit price: Six-digits
Weight: Five-digits
Total price: Six-digits

Memory:

SSD memory 250 MB

Communications:

Static TCP/IP 1G Base T Ethernet (auto-duplex) Wireless WEP/WPA/WPA2

Input/Output:

LAN 1 channel USB 4 channel SD 1 channel (SDHC: MAX 32 GB) (for transaction data)

Operating Voltage:

Range: 100 to 240 V, 50/60 Hz Permissible Tolerance: +/- 10%

Operating Environment:

32 °F to 104°F (0°C to 40°C) 20 to 85% relative humidity

Power Supply:

AC100 to 240 V, 50/60 Hz

Power Consumption:

Stand-by: 50 W In operation: 120 W

Classification:

NTEP CC 12-121 UL listed





Ishida Uni-9

PC-based, Price Computing Scale/Printer/Color Touchscreen

Uni-9's compact design fits nicely on virtually any size counter, occupying a very small footprint. This PC-based scale is available with a 7- or 12-inch LED backlit customer display for stunning promotional images and videos. The PC-based technology together with a crystal-sharp LED display, provide more marketing capabilities such as video with sound and product pairing promotions. In addition, more behind-the-counter functions such as store intranet access through a browser, recipe lookup, order entry and training videos reduce the need for additional PCs in all departments.

Available with or without a seven-inch customer display, the Uni-9 Series bench scale is ideal for both backroom production and the countertop.

Standard Features

- Large color touchscreen (12 in)
- · Adjustable touchscreen viewing angle
- Customer display can play video on either 12.1 in (800 × 600) or 7 in (800 × 480) screen, bench scale only
- Dual-range weighing (0 to 15 lb \times 0.005 lb, 15 to 30 lb \times 0.01 lb)
- Label printing: die-cut labels and/or continuous paper
- Customizable label formats: 999
- Up to seven label cassettes allow quick label changing or easy switching to different size labels
- Intranet browsing capabilities for order entry, recipe lookup and more
- PC-based scale operating system

- · Solid state drive eliminates moving parts
- · SD memory card slot
- · SSD memory 250 MB
- · 80 mm wide printing
- · Up to 150 mm/sec print speed
- 2020 nutrition labeling
- Configurable for different languages including Spanish, French and German
- Fully compliant with RoHS regulations for a completely lead-free machine
- Barcodes: EAN/UPC 8/12/13, ITF FS1, QR CODE, Databar/Limited/Expanded, CODE128, EAN128
- Compatible with third-party communication software, including ADC's InterScale, Invatron's PLUM and Droste's PCScale Manager

PART #	MODEL	WIRELESS	CAPACITY
211871	Uni-9 Bench	V	0-15 x 0.005 lb/15-30 x 0.01 lb
170095	Uni-9 Bench Linerless		0-15 x 0.005 lb/15-30 x 0.01 lb
168873	Uni-9D Bench		0-15 x 0.005 lb/15-30 x 0.01 lb
151251	Uni-9 Short Pole	V	0-15 x 0.005 lb/15-30 x 0.01 lb
170096	Uni-9 Pole	V	0-15 x 0.005 lb/15-30 x 0.01 lb
LABELER			
160262	Uni-9 Bench	√	N/A



Bench model customer display



Bench model with label (pictured with platter 171675)



Short Pole model customer display



DB bench model

www.ricelake.com/retail · 800-472-6703

Ishida Uni-9

PC-based, Price Computing Scale/Printer/Color Touchscreen

PART #	MODEL/DESCRIPTION	WIRELESS	CAPACITY	EST. SHIP WEIGHT	PRICE
211871	Uni-9 Bench	√	0-15 x 0.005 lb/15-30 x 0.01 lb	35 lb	Consult
170095	Uni-9 Bench Linerless	√	0-15 x 0.005 lb/15-30 x 0.01 lb	35 lb	Consult
168873	Uni-9D Bench		0-15 x 0.005 lb/15-30 x 0.01 lb	35 lb	Consult
170096	Uni-9 Short Pole	√	0-15 x 0.005 lb/15-30 x 0.01 lb	43 lb	Consult
151252	Uni-9 Pole	√	0-15 x 0.005 lb/15-30 x 0.01 lb	47 lb	Consult
LABELER					
160262	Uni-9 Bench	√	N/A	32 lb	Consult

Options/Accessories

155393	Additional label cassette	Consult
159947	Linerless label cassette	Consult
174110	SD memory card, 2 GB	Consult
155395	Larger platter option, (W x D) 14 x 9 in	Consult
192016	Seafood pan (for use on platter PN 171675 ONLY)	Consult

Communication

160259**	Consult	
152628*	ScaleLink Pro 5 license file, one license required per computer	Consult
215310	Internal wireless communication 802.11 b/g 2.4Ghz/5Ghz	Consult
78860	Cross cable, Ethernet CAT5, 6ft	Consult

Manuals and Service Tools

118188**	Uni Series support USB (contains manuals, training videos and libraries)	Consult
160906	USB flash memory, 1 GB	Consult
162196**	Service manual, technical	Consult
162199	Service manual, programming	Consult
162299	Installation manual	Consult

Label Stock

Please refer to labels section of this catalog for ordering information and case quantity pricing

Dimensions

Please see next page for model dimensions.



Cassette label load



Seafood pan PN 192016 (only fits on platter PN 171675)


^{*}Software key is provided after online registration is completed

^{**}Manuals and software programs can be downloaded from the distributor section of www.ricelake.com/retail


Ishida Uni-9

PC based, Price Computing Scale/Printer/Color Touchscreen

DIMENSIONS BENCH						
A	11.9in (302 mm)	Е	5.8 in (148 mm)	I	6.5 in (166 mm)	
В	9.0 in (229 mm)	F	20.3 in (516 mm)	J	2.2 in (55 mm)	
С	11.1 in (283 mm)	G	11.8in (300 mm)	K	11.8 in (300 mm)	
D	6.2 in (159 mm)	Н	6.4 in (162 mm)	L	10.6 in (268 mm)	

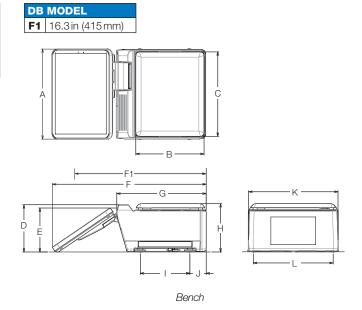

DIMENSIONS SHORT POLE						
Α	11.9 in (302 mm)	G	16.0 in (407 mm)	M	10.2 in (258 mm)	
В	9.0 in (229 mm)	Н	6.4 in (162 mm)	N	4.4 in (113 mm)	
С	11.1 in (283 mm)	ı	10.3 in (262 mm)	0	11.8in (300mm)	
D	6.2 in (159 mm)	J	1.9in (47 mm)	Р	9.5 in (242 mm)	
Е	5.8in (148mm)	K	11.9 in (302 mm)			
F	24.5 in (623 mm)	L	10.6 in (268 mm)			

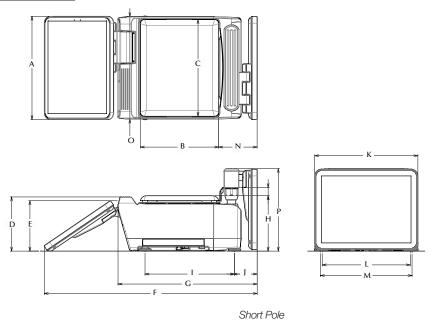



www.ricelake.com/retail · 800-472-6703


Ishida Uni-9

PC based, Price Computing Scale/Printer/Color Touchscreen

DIMENSIONS LABELER						
Α	11.9 in (302 mm)	G	11.8 in (300 mm)	K	11.8 in (300 mm)	
D	6.2 in (159 mm)	Н	5.6in (141 mm)	L	10.6 in (268 mm)	
Е	5.8in (148mm)	Т	6.5 in (166 mm)			
F	20.3 in (516 mm)	J	2.2 in (55 mm)			







Labeler