





Part Number/Price

Part #	Description	Dimensions (L × W × H)	Est. Weight	Price	
Steel Construction - Painted Black					
112330	60,000 lb (30,000 lb each)	7 ft × 2.5 ft × 5.63 in	2,500 lb	Consult	
111748	80,000 lb (40,000 lb each)	12 ft × 2.5 ft × 5.63 in	4,400 lb	Consult	
112328	80,000 lb (40,000 lb each)	14 ft × 2.5 ft × 5.75 in	5,200 lb	Consult	
Aluminum Construction - Glass Beaded					
112329	60,000 lb (30,000 lb each)	7 ft × 2.5 ft × 5.63 in	1,250 lb	Consult	

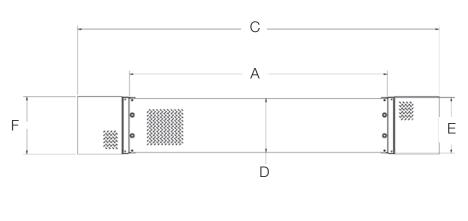

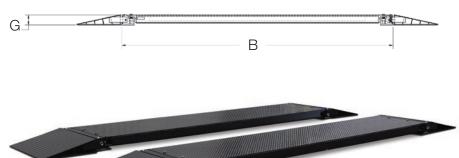

Standard Features

• System includes two platforms and four on/off ramps (anchor bolts not included)

Scale

- Sizes: 7 ft, 12 ft and 14 ft lengths
- Construction: Steel or aluminum
- Axle capacity tandem platforms 60,000 or 80,000 lb (30,000 or 40,000 lb each)
- Includes (4) 5/8-11 NC eye bolts for lifting scale during installation
- Contains two load cells per platform
- Treaded top plate with four lifting eyes
- JB4SS TuffSeal[®] signal trim junction box
- 10 ft EL146HE Interconnect cable with MS-type connectors to go between weigh pads
- 50 ft EL147HE cable to connect weigh pad to indicator
- Non-Legal for Trade

Ramps

- Ramps: (L × W) 7 ft and 12 ft scales -5.63 × 32.00 in, 14 ft scale 5.75 × 32.00 in
- Steel or aluminum

Specifications

- **Construction:**
- Steel or aluminum

Accuracy:

± 3%

- End Loading Capacity:
- 133% full scale at 30,000 lb 100% full scale at 40,000 lb
- Warranty:
- One-year limited

Part Number/Price

Aک	AX3040				
7 f	t Steel				
А	83.60 in	E	31.00 in		
В	90.90 in	F	32.00 in		
С	141.25 in	G	5.63 in		
D	30.00 in				
12	ft Steel				
Α	143.60 in	E	31.00 in		
В	150.90 in	F	32.00 in		
С	201.2 in	G	5.63 in		
D	30.00 in				
14 ft Steel					
Α	167.60 in	E	31.00 in		
В	174.90 in	F	32.00 in		
С	225.25 in	G	5.75 in		
D	30.00 in				
7 f	t Aluminum				
Α	83.60 in	E	31.00 in		
В	90.90 in	F	32.00 in		
С	141.25 in	G	5.63 in		
D	30.00 in				
	Noto: 1 in = 25.4 mm				

Note: 1 in = 25.4 mm