
C (4)

W2 W3

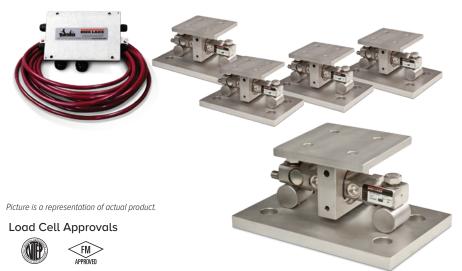

### **Order Information**

Load Rating (Per Module)	Part#	Price
3-Module Kit		
5,000 lb*	46695	Consult
10,000 lb	46696	Consult
20,000 lb	46697	Consult
30,000 lb	46698	Consult
40,000 lb	46699	Consult
50,000 lb	46700	Consult
60,000 lb	46701	Consult
4-Module Kit		
5,000 lb*	46702	Consult
10,000 lb	46703	Consult
20,000 lb	46704	Consult
30,000 lb	46705	Consult
40,000 lb	46706	Consult
50,000 lb	46707	Consult
60,000 lb	46708	Consult
Dummy Load Cells (I	Mild Steel)	
5,000 to 20,000 lb	33749	Consult
30,000 to 60,000 lb	74016	Consult
Grounding Kit		
5,000 to 60,000 lb	126419	Consult

Includes ground strap and mounting hardware \*Non-NTEP

# **Shims**

Part #	Price								
5,000 to 20,000 lb, Stainless Steel									
150886	Consult								
150888	Consult								
150889	Consult								
30,000 to 60,000 lb, Stainless Steel									
150890	Consult								
150891	Consult								
150892	Consult								
5,000 to 20,000 lb, Mild Steel									
150874	Consult								
150876	Consult								
150877	Consult								
0 lb, Mild Steel									
150878	Consult								
150880	Consult								
150881	Consult								
	Ib, Stainless Steel								

# **Complete Kit Includes**

- Three or four EZ Mount 1 stainless steel compression mounts with RL72019SS welded-seal stainless steel double-ended shear beam load cells
- One JB4SS NEMA Type 4X stainless steel signal trim junction box
- 25 ft of hostile environment EL147HE SURVIVOR® load cell cable

### **Standard Features**

- Capacities (per module): 5,000 to 60,000 lb
- NTEP Certified (except 5,000 lb module)
- Stainless steel construction
- Unique sliding pin design compensates for thermal expansion/contraction
- · Self-checking
- Easy load cell replacement
- Simplified design allows bolting directly to tank and floor
- Double-ended beam design, center-loaded
- · Low-profile design

# **Applications**

• Medium- to heavy-capacity tank and hopper weighing applications

#### **Dimensions**

Rated Capacity Ib/in	С	C1	н	H1	H2	L	L1	L2	L3	L4	Т	w	W1	W2	W3
5,000 to 20,000	0.56	1.06	5.31	0.75	0.50	11.00	8.00	3.00	6.00	6.87	5/8-18 UNF	7.50	4.00	3.00	6.00
30,000 to 60,000	0.68	1.19	8.43	1.00	0.75	15.00	11.50	5.12	8.00	8.50	1-14 UNS	10.00	6.00	5.12	8.00

NOTES: Mounting bolts (T) may project on lower side of base plate. Foundation plate not included

