



Picture is a representation of actual product.

Approvals








Order Information

Load Rating	Part#	Est. Weight	Price	
10 kg	101915	3 lb	Consult	
20 kg	101916	3 lb	Consult	
50 kg	101917	3 lb	Consult	
100 kg	101918	3 lb	Consult	

Dimensions

Rated Capacity	В	E	F	G	Н	1	J
kg/mm							
10 to 100	19.0	25.0	75.0	100.0	17.5	40.0	150.0

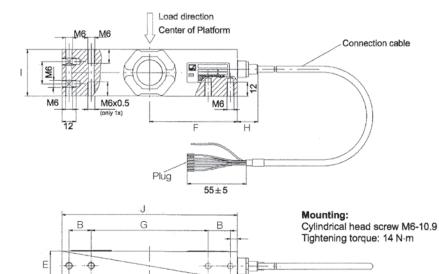

Interchangeable Products RICE LAKE WEIGHING SYSTEMS **RLPWM15HE**......page 154 FLINTEC® PC4.....page 218

Specifications

Full Scale Output:

2.0 mV/V

Output Resistance:

350 (± 10) ohm

Input Resistance:

380 (± 15) ohm

Material/Finish:

Stainless steel

Temperature: Compensated:

14 °F to 104 °F (-10 °C to 40 °C)

Operating:

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Hermetically sealed, IP69K

Safe Overload: 150% full scale

Rated Excitation:

5 to 15 VDC

Combined Error:

0.02% full scale

Insulation Resistance: 1,000 megohm

Cable Length:

3 m

Cable Diameter:

5.38 m

PVC jacket

Cable Color Code:

Blue +Excitation

Black -Excitation White +Signal

Red -Signal

Green +Sense

Grey -Sense

Warranty: One-year limited

Approvals:

NTEP

OIML FΜ