







Automatic Wrapper Accessories

Roller Pack Off Tables and Conveyors

Providing room to work and efficient product flow, the three-foot and fivefoot roller pack-off tables make smart accessories for your wrap stations. With a heavy-duty stainless steel frame, and 3/4-inch poly rollers, it easily transfers and holds multiple packages. The additional stainless steel counter gives operators extra space for handling trays.

Standard Features

- Sturdy welded 304 stainless steel frame with package stop
- Reversible for right to left package travel · 32 to 36 in height adjustment
- 304 stainless steel work surface Heavy duty 3/4-inch aluminum rollers, 1 inch on center for smooth package transfer

| PART # | MODEL |
|--------|---|
| 197187 | Roller pack off table, 3 ft with 1 ft fixed infeed, stainless |
| 192307 | Roller pack off table, 5 ft with 1 ft fixed infeed, stainless |
| 73065 | Day Glow label dispenser for roller table |
| 151761 | Day Glow label dispenser spacer, pack of ten (use with PN 73065 only) |
| 188046 | Day Glow label dispenser for large diameter label rolls |
| 71283 | Gravity conveyor, 3 ft aluminum with galvanized H-supports, (W x H) 15 x 31-37 in |
| 71526 | Gravity conveyor, 5 ft aluminum with galvanized H-supports (W x H) 15 x 31-37 in |

Wrapper Infeed Tray Stand

Our wrapper infeed tray stand has an adjustable, stable three leg design and a sturdy welded stainless steel frame.

Standard Features

- Sturdy welded 304 stainless steel frame with adjustable height
- · Stable three leg design
- Generous top (13.25 × 23 in)
- Adjustable height from 26 to 36 in

| PART # | MODEL |
|--------|---------------------------|
| 193238 | Wrapper Infeed Tray Stand |
| | |

Rotary Bin

P

Offering a gathering and transportation option, the aluminum bin with a handle and wheels will streamline backroom to shelf operation. The large bin has adjustable heights to complement a range of workstations. Additionally, the aluminum bin with stainless steel frame is easy to clean and is built to withstand heavy use.

Standard Features

- · Sturdy, welded all 304 stainless steel frame
- · Wheels for easy transportation · Easy clean design
- · Large 28 in diameter 8 in depth aluminum tub
- Adjustable height from 26 in to 36 in

| PART # | MODEL |
|--------|--|
| 46945 | Rotary bin, (W x D) 28 dia. x 8 in, adjustable height with wheels and handle |

www.ricelake.com/retail • 800-472-6703 66

An ISO 9001 registered company © 2023 Rice Lake Weighing Systems • Specifications subject to change without notice. • F.O.B. Rice Lake, Wisconsin

www.ricelake.com/retail • 800-472-6703

Automatic Wrapper Accessories

Roller Pack Off Table/Rotary Bin

| PART # | MODEL/DESCRIPTION | PRICE |
|--------|---|---------|
| 197187 | Roller pack off table, 3 ft with 1 ft fixed infeed | Consult |
| 192307 | Roller pack off table, 5 ft with 1 ft fixed infeed | Consult |
| 73065 | Day Glow label dispenser for roller table | Consult |
| 151761 | Day Glow label dispenser spacer, pack of ten (use with PN 73065 only) | Consult |
| 188046 | Day Glow label dispenser for large diameter label rolls | Consult |
| 71283 | Gravity conveyor, 3 ft aluminum with galvanized H-supports, (W x H) 15 x 31-37 in | Consult |
| 71526 | Gravity conveyor, 5ft aluminum with galvanized H-supports (W x H) 15 x 31-37 in | Consult |
| 193238 | Wrapper infeed tray stand | Consult |
| 46945 | Rotary bin | Consult |

| DIMENSIONS | | | |
|------------|------------------|---|----------------------|
| 3 FT TABLE | | | |
| Α | 36.0 in (914 mm) | С | 11.6in (295mm) |
| В | 30.0 in (762 mm) | D | 31.1 in (789 mm) min |


| DIMENSIONS | | | |
|------------|-------------------|---|----------------------|
| 5 FT TABLE | | | |
| Α | 60.0 in (1524 mm) | С | 11.6in (295mm) |
| В | 30.0 in (762 mm) | D | 31.1 in (789 mm) min |


DIMENSIONS


DIMENSIONS

A 23.0 in (584 mm)B 13.5 in (343 mm)

WRAPPER INFEED TRAY STAND



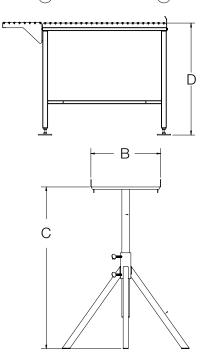



| www.ricelake.com/retail • 800-472-6703 | |
|--|--|
| | |

 ROTARY BIN

 A
 28 in diameter (711 mm)
 B
 8 in depth (203 mm)

(A)

C 26.0-36.0 in (660-914 mm)