


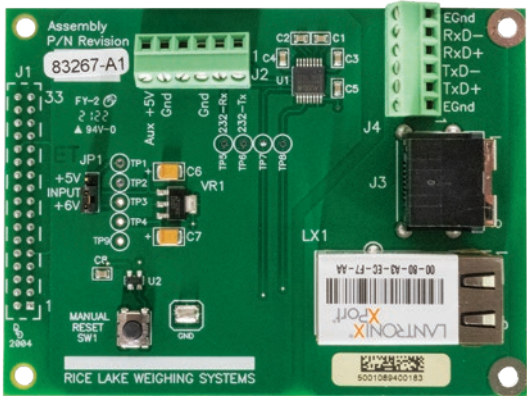

Part Number/Price

Part #	Description	Est. Weight	Price
71986	Ethernet TCP/IP interface for 720i/920i indicators	3 lb	Consult
206271	Wireless Ethernet TCP/IP interface for 720i/920i indicators	3 lb	Consult
206272	Wireless Ethernet TCP/IP interface for 720i, CW-90 indicators and iQUBE ²	3 lb	Consult

Options/Accessories

Part #	Description	Price
72117	Additional operating manual	Consult
Cables		
72697	RJ-45 to RJ-45, straight, 7 ft length	Consult
78860	RJ-45 to RJ-45, cross over, 7 ft length	Consult

Standard Features

- Supports any serial devices with seven or eight data bits requiring Ethernet access
- Compact size for internal installation in 720i and 920i indicators
- Can be used in other applications requiring five-volt power supplied
- 10/100 megabyte through RJ45 connector or wireless option
- HTTP, serial, telnet and SNMP management

Specifications

- Power:**
5 VDC, 250 mA
- Supported Protocols:**
ARP, UDP, TCP, Telnet, SNMP, ICMP, HTTP, BOOTP, DHCP and TFTP
- Network Interface:**
Ethernet: RJ-45 (10/100 Base-T) or AUI
- Serial Line Formats:**
Characters: 7 or 8 data bits
Stop bits: 1 or 2
Parity: odd, even, none
- Data Rates:**
Single port, 300 bps to 115.2 Kbps default 9,600
- Dimensions:**
2.00 × 1.90 × 0.75 in
(52 × 49 × 19 mm)
- Temperature:**
Operating:
41 °F to 122 °F (5 °C to 50 °C)

INDICATORS /
CONTROLLERS



PN 206272



PN 206271