

Picture is a representation of actual product

### Approvals




### Order Information

| Load Rating                        | Part # | Est. Weight | Price   |
|------------------------------------|--------|-------------|---------|
| <b>1.5 m Cable</b>                 |        |             |         |
| 7.5 kg                             | 53485  | 2 lb        | Consult |
| 10 kg                              | 112374 | 2 lb        | Consult |
| 15 kg                              | 53486  | 2 lb        | Consult |
| 30 kg                              | 53487  | 2 lb        | Consult |
| 50 kg                              | 53488  | 2 lb        | Consult |
| 100 kg*                            | 53490  | 2 lb        | Consult |
| <b>3 m Cable</b>                   |        |             |         |
| 7.5 kg                             | 111381 | 2 lb        | Consult |
| 10 kg                              | 112365 | 2 lb        | Consult |
| 15 kg                              | 114132 | 2 lb        | Consult |
| 30 kg                              | 114133 | 2 lb        | Consult |
| <b>25 ft Cable Trimmed Outputs</b> |        |             |         |
| 15 kg                              | 124512 | 2 lb        | Consult |
| 30 kg                              | 124513 | 2 lb        | Consult |

\*Non-NTEP Certified

### Dimensions

| Rated Capacity | A    | B    | C    | F     | G    | I    | J     |
|----------------|------|------|------|-------|------|------|-------|
| kg/mm          |      |      |      |       |      |      |       |
| 7.5 to 100     | 35.0 | 25.0 | 15.0 | 106.0 | 30.0 | 14.5 | 135.0 |

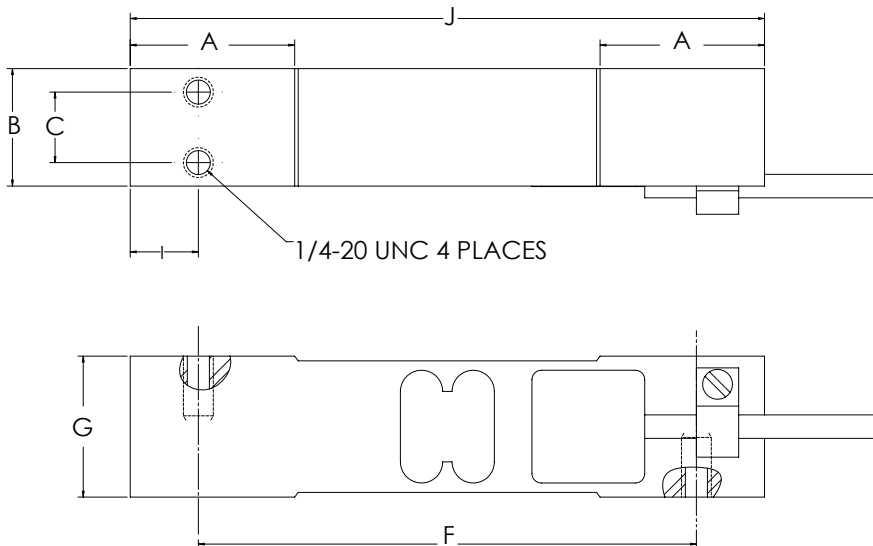

### Interchangeable Products

EVERY WEIGH-TRONIX®  
MK29

### Specifications

- Full Scale Output:** 2.0 mV/V
- Output Resistance:** 350 (± 3) ohm
- Input Resistance:** 385 (± 15) ohm
- Material/Finish:** Stainless steel
- Temperature:** Compensated range 14 °F to 104 °F (-10 °C to 40 °C)  
Operating range 0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:** Environmentally sealed, IP66
- Safe Overload:** 200% full scale, at center loading point
- Rated Excitation:** 5 to 10 VDC (15 V maximum)
- Total Error:** 0.02% full scale
- Insulation Resistance:** 2,000 megohm
- Deflection at Capacity:** 0.015 in
- Cable Length:** 1.5 m, 3 m, 25 ft
- Cable Diameter:** 0.200 in, PVC jacket
- Cable Color Code:** Green +Excitation, Black -Excitation, Red +Signal, White -Signal, Blue +Sense, Brown -Sense
- Platform Size:** 15.75 × 15.75 in
- Warranty:** One-year limited
- Approvals:** cFMus, NTEP (100 kg is non-NTEP)