

Stainless Steel, Hermetically Sealed, NTEP Certified 1:10,000 Class IIIL Multiple Cell, OIML C3, IP66/68

**Limited Stock Available**

Picture is a representation of actual product

**Approvals****Order Information: NTEP Certified**

Load Rating	Part #	Est. Weight	Price
<b>NTEP Certified</b>			
3.5 T	<b>36193</b>	3 lb	Consult
5 T	<b>36194</b>	3 lb	Consult
<b>OIML</b>			
0.25 T	<b>126714</b>	2 lb	Consult
1 T	<b>126716</b>	2 lb	Consult

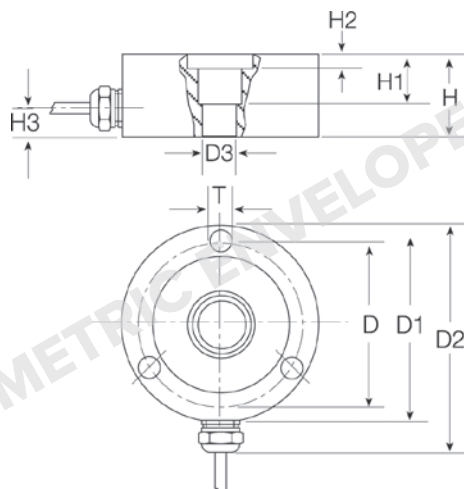
**Replacement Rocker Pin Set\***

Load Rating (Per Module)	Part #	Price
250 kg to 1 T	<b>170875</b>	Consult
2 T to 5 T	<b>170876</b>	Consult
10 T	<b>170877</b>	Consult

\*Kit includes upper cup, rocker pin and grease

**Dimensions**

Rated Capacity	D	D1	D2	D3	H	H1	H2	H3	T
<b>T/mm</b>									
0.25 to 1	70.1	80.0	97.5	10.2	25.1	15.2	1.0	9.4	M6 (3 x 120°)
3.5 to 5	70.1	80.0	97.5	15.24	30.0	20.1	6.1	8.4	M6 (3 x 120°)

**Weigh Module Available**

RICE LAKE WEIGHING SYSTEMS

RLC..... page 59

**Specifications****Full Scale Output:**

2.0 mV/V

**Output Resistance:**

1,025 (± 25) ohm

**Input Resistance:**

1,110 (± 50) ohm

**Material/Finish:**

Stainless steel

**Temperature:**

Compensated:

14 °F to 104 °F (-10 °C to 40 °C)

Operating:

0 °F to 150 °F (-18 °C to 65 °C)

**Seal Type:**

Hermetically sealed, IP66/68

**Safe Overload:**

150% full scale

**Safe Sideload:**

100% full scale

**Rated Excitation:**

5 to 10 VDC (15 V maximum)

**Combined Error:**

0.02% full scale

**Insulation Resistance:**

5,000 megohm

**Cable Length:**

5 m

**Cable Color Code:**

Pink +Excitation

Grey -Excitation

Brown +Signal

White -Signal

**Warranty:**

One-year limited

**Approvals:**

NTEP

OIML

FM