

# **Specifications**

Capacity (Dual Range):

0 to  $15 \times 0.005$  lb/15 to  $30 \times 0.01$  lb

### Capacity (Single Range):

0 to  $60 \times 0.02$  lb option

# Weighing Resolution:

3,000 display divisions maximum

#### **Display Types:**

L1: LCD, blue alphanumeric (23 digits 16 seg)
L2: LCD, backlight, alphanumeric (192 × 16 DM + 23 digits 7 seg)

#### **Display Items:**

Tare: Four-digits Weight: Five-digits Total price: Six-digits

#### Preset Kevs:

84 one-touch preset keys 168 presets (assign two items/key)

# **Memory Capacity:**

2 MB

#### **Communications:**

TCP/IP 10/100 Base T Ethernet

#### Platter:

 $14.5 \times 10.5 \text{ in}$ 

#### **Printing Speed:**

3.9 in (100 mm) per second

#### **Printing:**

Direct thermal 2.2 in (56 mm)

#### Label Size:

Width: 1.5 to 2.5 in (38 to 64 mm) Length: 1.2 to 6.9 in (30 to 175 mm)

#### Label Roll:

Inside diameter: 1.6 in (40 mm)
Outside diameter: 3.9 in (100 mm)

#### **Label Backing Paper:**

Width: Up to 2.6 in (66 mm)

### **Power Supply:**

AC 100 to 240 V. 50/60 Hz

# **Power Consumption:**

Stand-by: 50 W In operation: 100 W

#### **Classification:**

NTEP CC 07-005 UL Listed



One-year limited



# Ishida Uni-3

Price Computing Electronic System Scale Printer

With premium-class presets, fast print speed and more labeling functions, you are getting more flexibility and more features – all for less cost than comparable price computing scales with printers.

With two models and two display types, you can easily find a Uni-3 to fit your specific application needs.

Ethernet or optional wireless communication enables any Uni-3 to be added to your existing network – ensuring you have consistent control of all scales in your store.

Optional product management software ensures easy file maintenance as well as PLU and tare weight consistency throughout your operation.

The power of the Uni-3 is at your fingertips with flexible preset buttons to represent PLUs, container tare values, label formats, images and logos.

The Uni-3 L1 model features a vibrant blue alphanumeric display with a sharp white 16-segment capability. The Uni-3 L2 model features a clear alphanumeric LCD display with one line alphanumeric and one line numeric only. Each model offers a matching customer display.

# **Standard Features**

- Blue alphanumeric LCD display (23 digits, 16 segments) or backlit alphanumeric LCD display (23 digits, 7 segments)
- Dual-range weighing (0-15 lb x 0.005 lb/ 15-30 lb x 0.01 lb)
- Side-load label
- Fast printing speed (3.9 in/100 mm per second)
- Meat nutrition and 2020 nutrition labeling
- · Multiple label formats
- · Powerful batch printing feature

- Static TCP/IP Ethernet communication
- 84 one-touch preset keys, 168 presets (assign two items/key)
- Flash ROM for simple update of application software
- 2 MB memory
- Proportional tare
- Compatible with third-party communication software, including ADC's InterScale and Invatron's PLUM

PART #	MODEL	CAPACITY
165200	Uni-3L1 Bench	0-15 x 0.005 lb/15-30 x 0.01 lb
165201	Uni-3L1 Pole	0-15 x 0.005 lb/15-30 x 0.01 lb
173882	Uni-3L1 Bench	0-60 x 0.02 lb
173883	Uni-3L1 Pole	0-60 x 0.02 lb
165202	Uni-3L2 Bench	0-15 x 0.005 lb/15-30 x 0.01 lb
165203	Uni-3L2 Pole	0-15 x 0.005 lb/15-30 x 0.01 lb
173884	Uni-3L2 Bench	0-60 x 0.02 lb
173885	Uni-3L2 Pole	0-60 x 0.02 lb



L1 Customer Display Bench Unit

#### **Uni-3 DISPLAYS**





Side-loading Label Feature



Uni-3L2

www.ricelake.com/retail · 800-472-6703

# **Ishida Uni-3**

Price Computing Electronic System Scale Printer

PART #	MODEL/DESCRIPTION	CAPACITY	EST. SHIP WEIGHT	PRICE
165200	Uni-3L1 Bench	0-15 x 0.005 lb/15-30 x 0.01 lb	25 lb	Consult
165201	Uni-3L1 Pole	0-15 x 0.005 lb/15-30 x 0.01 lb	25 lb	Consult
173882	Uni-3L1 Bench	0-60 x 0.02 lb	25 lb	Consult
173883	Uni-3L1 Pole	0-60 x 0.02 lb	25 lb	Consult
165202	Uni-3L2 Bench	0-15 x 0.005 lb/15-30 x 0.01 lb	25 lb	Consult
165203	Uni-3L2 Pole	0-15 x 0.005 lb/15-30 x 0.01 lb	25 lb	Consult
173884	Uni-3L2 Bench	0-60 x 0.02 lb	25 lb	Consult
173885	Uni-3L2 Pole	0-60 x 0.02 lb	25 lb	Consult

# **Options/Accessories**

170541	Linerless label modification kit	Consult
47976	Fish platter, (L x W x H) 9.5 x 13.5 x 0.7 in with drain	Consult
47977	Produce platter, (L x W x H) 9.5 x 13.5 x 0.7 in	Consult

# Communication

168750**	ScaleLink Pro 5 Lite software CD, license file required and purchased separately (see page 74)	Consult
168751*	ScaleLink Pro 5 Lite license file, one license required per computer	Consult
160259**	ScaleLink Pro 5 software CD, license file required and purchased separately (see page 72)	Consult
152628*	ScaleLink Pro 5 license file, one license required per computer	Consult
168745	Internal wireless communication 802.11 b/g 2.4 Ghz (factory installation required)	Consult
78860	Cross cable Ethernet CAT5, 6ft	Consult


# **Manuals and Service Tools**

166737**	Additional operation manual	Consult
166736**	Service manual	Consult
160906	USB flash memory device, 1 GB	Consult
118188**	Uni Series support USB (contains manuals, training videos and libraries)	Consult
162370**	Additional operation card	Consult

# **Label Stock**

Please refer to labels section of this catalog for ordering information and case quantity pricing.

<sup>\*\*</sup>Manuals and software programs can be downloaded from the distributor section of www.ricelake.com/retail

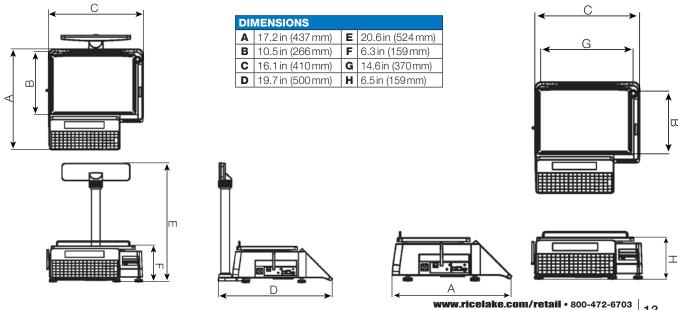

<sup>\*</sup>Software key is provided after online registration is completed