

Ishida Uni-3

Price Computing Printing Scales



60-lb
CAPACITY
AVAILABLE

FEATURES

- Simple, durable and robust design
- Fixed side-load cassette with virtual function
- Prints safe handling instructions, country of origin, 2020 nutrition, custom text messages, custom images and more
- Batch printing
- Dynamically generated QR code printing
- Backlit alphanumeric LCD display
- Programmable tactile preset keys
- Flash ROM for simple update of application firmware
- Fully compliant with RoHS regulations for a completely lead-free machine
- Optional Wi-Fi kit (factory installation recommended)
- Optional linerless kit
- Compatible with third-party software, including Upshop 360®, ADC's InterScale®, Invafresh's ePlum®, Toast®, Square® and Droste®



Uni-3L1 display



Uni-3L2 display



Customer display, bench scale



Side-loading printer



SPECIFICATIONS

<p>Power: 100 to 240 VAC, 50/60 Hz</p> <p>Power Consumption: In operation: 100 W Stand-by: 50 W</p> <p>Resolution: 3,000 display divisions maximum</p> <p>Communications: LAN Static/DHCP Optional Wi-Fi 802.11a/b/g/n/ac 2.4 GHz/5 GHz Security: WEP/WPA/WPA2</p> <p>Input/Output: LAN USB-A (service, transaction data)</p>	<p>Operating System: VxWorks</p> <p>Memory Capacity: Flash ROM 2 MB</p> <p>Preset Keys: 84 programmable tactile preset keys (168 presets when assigning two items per key) 18 tactile function keys</p> <p>Display: Operator L1: LCD, blue backlight, alphanumeric (23 digits 16 seg) Operator L2: LCD, green backlight, alphanumeric (192 × 16 DM, 23 digits 7 seg) Unit price: five digits Tare: four digits Weight: five digits Total price: six digits</p>	<p>Printer: Printhead: 2.2 in (56 mm) direct thermal, effective 2.2 in (56 mm) Resolution: 200 dpi (8 dot/mm) Speed: 3.9 in/sec (100 mm/sec) max Min. weight: 30 lb, 0.015 lb (0.006 kg) 60 lb, 0.03 lb (0.012 kg) Formats: customizable, up to 999 Barcodes: UPC, JAN, EAN, EAN128, CODE128, ITF, GS1, QR</p> <p>Label Size: Type: Die-cut, continuous, optional linerless label Width: 1.5 to 2.5 in (38 to 64 mm) Length: 1.2 to 6.9 in (30 to 175 mm)</p>	<p>Label Roll: I.D.: 1.6-in (40 mm) min O.D.: 3.9-in (100 mm) max Backing width: 2.6-in (66 mm) max</p> <p>Platter: 15.5 × 9.5 in (394 × 241 mm)</p> <p>Weight: Approx. 47 lb (21.3 kg)</p> <p>Temperature: Operating: 32 °F to 104 °F (0 °C to 40 °C)</p> <p>Humidity: 20 to 85% RH (without condensation)</p> <p>Warranty: One-year limited</p> <p>Approvals: NTEP 07-005 cULus Listed</p>
--	--	---	---

PART NUMBER/PRICE

PART #	MODEL/DESCRIPTION	WIRELESS	SINGLE-RANGE CAPACITY	DUAL-RANGE CAPACITY	EST. SHIP WEIGHT	PRICE
165200	Uni-3L1 Bench		0 to 30 × 0.01 lb	0 to 15 × 0.005 lb / 15 to 30 × 0.01 lb	25 lb	Consult
173882	Uni-3L1 Bench		0 to 60 × 0.02 lb	-	25 lb	Consult
219464	Uni-3L1 Bench	✓	0 to 30 × 0.01 lb	0 to 15 × 0.005 lb / 15 to 30 × 0.01 lb	25 lb	Consult
173883	Uni-3L1 Pole		0 to 60 × 0.02 lb	-	25 lb	Consult
165201	Uni-3L1 Pole		0 to 30 × 0.01 lb	0 to 15 × 0.005 lb / 15 to 30 × 0.01 lb	25 lb	Consult
165202	Uni-3L2 Bench		0 to 30 × 0.01 lb	0 to 15 × 0.005 lb / 15 to 30 × 0.01 lb	25 lb	Consult
173884	Uni-3L2 Bench		0 to 60 × 0.02 lb	-	25 lb	Consult
219463	Uni-3L2 Bench	✓	0 to 30 × 0.01 lb	0 to 15 × 0.005 lb / 15 to 30 × 0.01 lb	25 lb	Consult
165203	Uni-3L2 Pole		0 to 30 × 0.01 lb	0 to 15 × 0.005 lb / 15 to 30 × 0.01 lb	25 lb	Consult
173885	Uni-3L2 Pole		0 to 60 × 0.02 lb	-	25 lb	Consult
165204	Uni-3L2H Hanging	✓	0 to 30 × 0.01 lb	0 to 15 × 0.005 lb / 15 to 30 × 0.01 lb	25 lb	Consult

Ishida Uni-3

Price Computing Printing Scales

OPTIONS/ACCESSORIES

PART #	DESCRIPTION	PRICE
170541	Linerless label modification kit	Consult
47976	Fish platter, (L × W × H) 9.5 × 13.5 × 0.7 in with drain	Consult
47977	Produce platter, (L × W × H) 9.5 × 13.5 × 0.7 in	Consult
160906	USB flash memory device, 1 GB	Consult
109499	Rectangular pan (L × W × D) 11.2 × 15.5 × 2.2 in	Consult

COMMUNICATION

PART #	DESCRIPTION	PRICE
168751*	ScaleLink Pro 5 Lite license file, one license required per computer	Consult
152628*	ScaleLink Pro 5 license file, one license required per computer	Consult
227832	Internal wireless communication 802.11 b/g 2.4 GHz/5 GHz (factory installation required)	Consult
78860	Cross cable, Ethernet CAT5, 6 ft	Consult

*Software key is provided after purchase and online registration is completed at www.ricelake.com/ishida-software-form
 NOTE: Manuals and software programs can be downloaded from the distributor section of www.ricelake.com/retail

LABEL STOCK


DESCRIPTION

Please refer to labels section of this catalog for ordering information and case quantity pricing

DIMENSIONS




Uni-3 Bench

A	17.2 in (437 mm)	D	6.3 in (159 mm)
B	10.5 in (266 mm)	E	14.5 in (368 mm)
C	15.9 in (404 mm)		

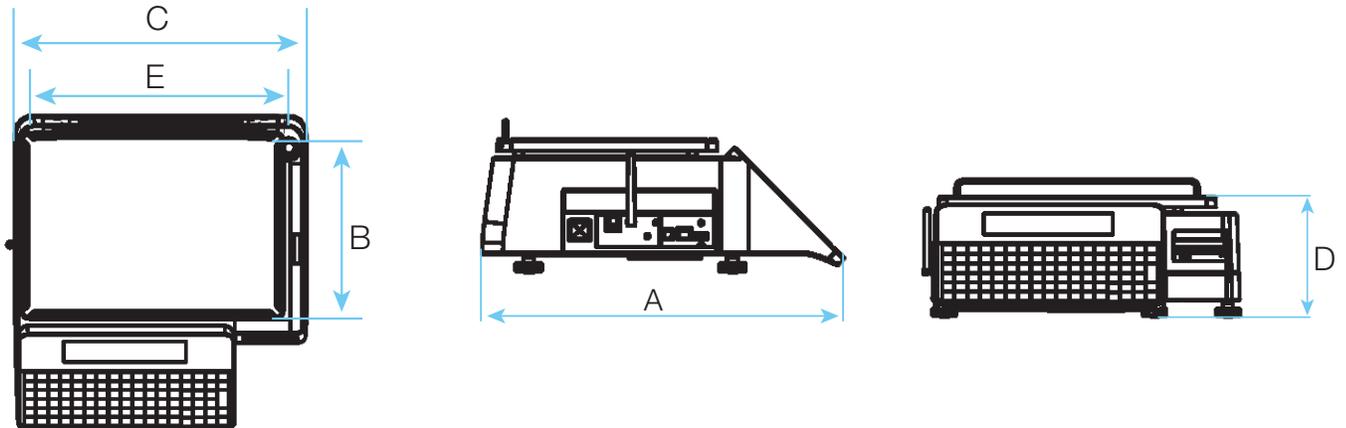

DIMENSIONS




Uni-3 Pole					
A	17.2 in (437 mm)	D	19.7 in (500 mm)	F	6.3 in (159 mm)
B	10.5 in (266 mm)	E	20.6 in (523 mm)	G	14.5 in (368 mm)
C	15.9 in (404 mm)				

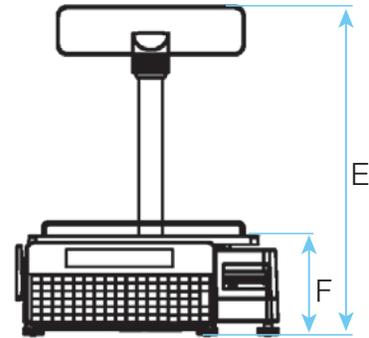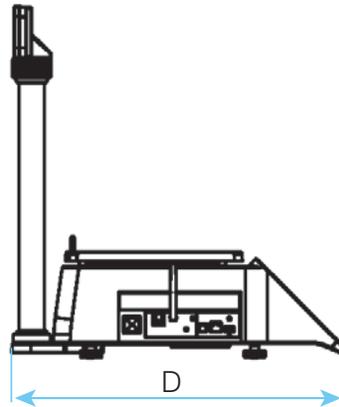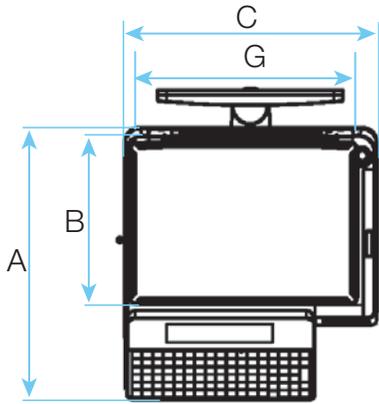

DIMENSIONS

Uni 3 Hanging					
A	16.5 in (420 mm)	C	26.7 in (678 mm)	E	14.2 in (360 mm)
B	31.5 in (800 mm)	D	5.7 in (146 mm)		

Mounting Specifications	
Pipe: 1.10 in outside diameter	

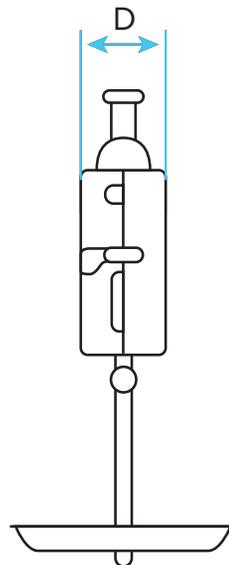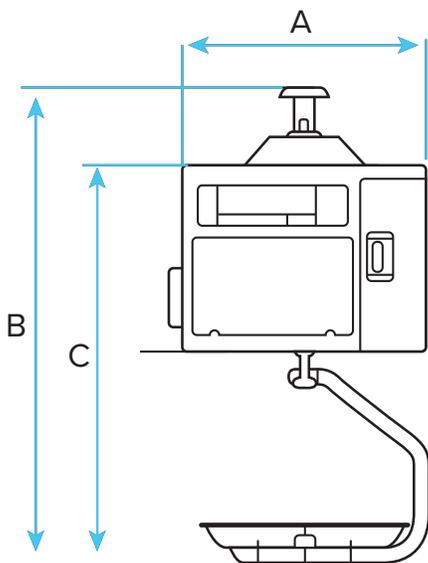

WARRANTY
RETAIL LABELS
POWER CONDITIONING
ACCESSORIES
SOFTWARE
WRAPPING SYSTEMS
LABELERS
PRICE COMPUTING PRINTING SCALES
PRICE COMPUTING SCALES
MULTI-PURPOSE RETAIL SCALES