



Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
1,000 lb	17268	4 lb	Consult
1,500 lb	17270	4 lb	Consult
2,500 lb	17273	4 lb	Consult
5,000 lb	17275	4 lb	Consult
10,000 lb	17277	7 lb	Consult
15,000 lb	17279	7 lb	Consult
20,000 lb	17281	7 lb	Consult
25,000 lb	17282	7 lb	Consult
35,000 lb	46498	8 lb	Consult
50,000 lb	17284	27 lb	Consult
75,000 lb*	25358	27 lb	Consult

*75,000lb capacity has a square center

Dimensions

Rated Capacity	A1	A2	C	D	E	F	CONDUIT ADAPTER
lb/in							
1,000 to 5,000	0.50	1.25	1.25	1.25	7.50	6.25	1/4-18 NPT
10,000 to 25,000	0.81	1.99	1.44	1.94	8.75	7.50	1/4-18 NPT
35,000	0.81	2.50	1.50	2.50	8.75	7.50	1/4-18 NPT
50,000	1.31	3.00	2.44	2.94	13.50	11.50	1/2-14 NPT
75,000	1.31	—	2.44	2.94	13.50	11.50	1/2-14 NPT

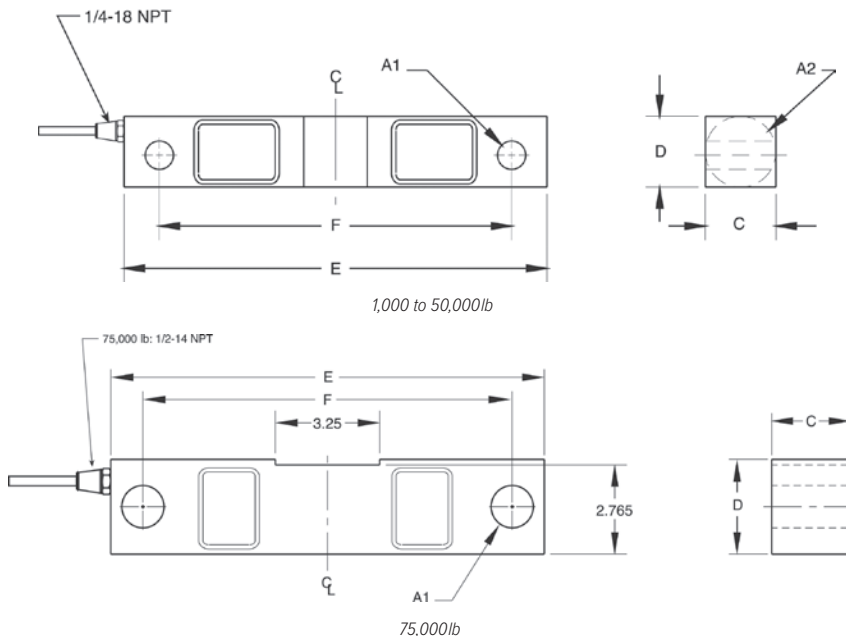

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS	
RL77032	page 128
RICE LAKE WEIGHING SYSTEMS	
RL75016	page 131
VPg® CELTRON®	
DSR	page 195
VPg® REVERE	
5203	

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS	
RL1600 Series	page 66 and page 67

Specifications

Full Scale Output:

3.0 mV/V nominal

Output Resistance:

699 to 707 ohm

Input Resistance:

686 to 714 ohm

Material/Finish:

High-alloy steel, nickel plated

Temperature:

Operating:
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP67

Safe Overload:

150% full scale

Safe Sideload:

100% full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Nonlinearity:

0.03% full scale

Hysteresis:

0.02% full scale

Insulation Resistance:

5,000 megohm

Cable Length:

25 ft

Cable Diameter:

1,000 to 25,000 lb: 0.200 in
50,000 to 75,000 lb: 0.301 in
Polyurethane jacket

Cable Color Code:

Red +Excitation
Black -Excitation
Green +Signal
White -Signal

Warranty:

One-year limited

Approvals:

cFMus